

Security Management System
Oracle FLEXCUBE Universal Banking
Release 11.80.02.0.0 CN Cluster
Oracle Part Number E64368-01
[January] [2016]



Table of Contents

1. ABOUT THIS MANUAL.....	1-1
1.1 INTRODUCTION.....	1-1
1.1.1 Audience.....	1-1
1.1.2 Abbreviations.....	1-1
1.2 GLOSSARY OF ICONS.....	1-2
1.2.1 Related Documents.....	1-3
2. SECURITY MANAGEMENT.....	2-1
2.1 INTRODUCTION.....	2-1
2.2 SETTING UP PARAMETERS AT THE BANK LEVEL.....	2-2
2.2.1 Invalid Logins.....	2-2
2.2.2 Specifying Parameter.....	2-3
2.2.3 Specifying Warning Screen Text.....	2-3
2.2.4 Specifying Parameters for User Passwords.....	2-3
2.2.5 Placing Restrictions on User Passwords.....	2-5
2.2.6 Password Restrictions.....	2-6
2.3 BRANCH RESTRICTIONS FOR SPECIFIC APPLICATIONS.....	2-7
2.4 CREATING COMMON BRANCH RESTRICTIONS.....	2-8
2.5 DEFINING FUNCTIONS.....	2-10
2.6 DEFINING A USER ROLE.....	2-14
2.6.1 The Procedure for Defining Role Profiles.....	2-14
2.6.2 Defining Functions for a Role Profile.....	2-14
2.6.3 Branch Restriction.....	2-15
2.6.4 Account Class Restriction.....	2-16
2.6.5 Rights.....	2-16
2.6.6 Password Restriction.....	2-19
2.6.7 Function Limits.....	2-20
2.6.8 Copying the Role Profile of an Existing Role.....	2-21
2.6.9 Closing a Role Profile.....	2-21
2.6.10 Defining Roles for Oracle FLEXCUBE Branch Users.....	2-21
2.6.11 Defining Role for Sales Team.....	2-21
2.7 DEFINING A LIMITS ROLE.....	2-22
2.8 DEFINING USER HOLIDAYS.....	2-24
2.9 VIEWING HOLIDAY SUMMARY.....	2-25
2.10 DEFINING A USER PROFILE.....	2-27
2.10.2 Restricted Passwords.....	2-33
2.10.3 Roles.....	2-34
2.10.4 Rights.....	2-35
2.10.5 Functions.....	2-37
2.10.6 Tills.....	2-39
2.10.7 Account Classes.....	2-40
2.10.8 General Ledgers.....	2-41
2.10.9 Limits.....	2-42
2.10.10 Branches.....	2-45
2.10.11 Products.....	2-46
2.10.12 Process.....	2-47
2.10.13 Disallowed Functions.....	2-48
2.10.14 Users Holiday.....	2-49
2.10.15 Copying the User Profile of an Existing User.....	2-50
2.10.16 Deleting a User Profile.....	2-50

2.10.17	<i>Closing a User Profile</i>	2-50
2.11	DEFINING ALERTS FOR USERS	2-50
2.12	MAINTAINING SALES HIERARCHY	2-52
2.13	VIEWING SALES HIERARCHY SUMMARY	2-54
2.14	SINGLE SIGN ON (SSO) ENABLED ENVIRONMENT	2-55
3.	ASSOCIATED FUNCTIONS	3-1
3.1	CLEARING A USER ID	3-1
3.2	CHANGING THE SYSTEM TIME LEVEL	3-1
3.3	VIEW CURRENT USERS	3-2
3.4	DEFINING LANGUAGE CODES	3-3
3.5	CHANGING THE BRANCH OF OPERATION	3-4
3.6	CHANGING THE USER PASSWORD	3-4
3.7	MAINTAINING SSO PARAMETERS	3-5
3.8	MAINTAINING TRANSACTION STATUS CONTROL	3-6
3.9	MAINTAINING ERROR MESSAGES	3-7
3.9.1	<i>Configuring Customized Hot Keys for Launching Screens</i>	3-9
3.10	VIEWING USER ACTIVITIES	3-10
3.11	VIEWING BRANCH STATUS	3-11
4.	ERROR CODES AND MESSAGES	4-1
4.1	ERROR CODES	4-1
5.	REPORTS	5-1
5.1	EVENTS LOG REPORT	5-1
5.1.1	<i>Contents of the Events Log</i>	5-1
5.2	SECURITY MANAGEMENT SYSTEM VIOLATIONS LOG REPORT	5-2
5.2.1	<i>Contents of the Security Management System Violations Log Report</i>	5-2
5.3	USER PROFILE REPORT	5-3
5.3.1	<i>Contents of the User Profile Report</i>	5-4
5.4	CHANGES REPORT	5-5
5.4.1	<i>Contents of the Changes Report</i>	5-6
5.5	INACTIVE USERS AGING ANALYSIS REPORT	5-7
5.5.1	<i>Contents of the Inactive Users Aging Analysis Report</i>	5-7
5.6	INACTIVE USERS LOG REPORT	5-7
5.6.1	<i>Contents of the Inactive Users Log Report</i>	5-8

1. About this Manual

1.1 Introduction

This Manual is designed to help you to quickly get familiar with the Security Management System (SMS) module of Oracle FLEXCUBE.

It provides an overview of the module and takes you through the various stages in setting- up and using the security features that Oracle FLEXCUBE offers.

Besides this User Manual, you can find answers to specific features and procedures in the Online Help, which can be invoked, by choosing Help Contents from the *Help* Menu of the software. You can further obtain information specific to a particular field by placing the cursor on the relevant field and striking <F1> on the keyboard.

1.1.1 Audience

This Manual is intended for the following User/User Roles:

Role	Function
Oracle FLEXCUBE Implementers	To set up the initial startup parameters in the individual client workstations. To set up security management parameters for the Bank.
SMS Administrator for the Bank	To set the SMS bank parameters. To identify the Branch level SMS Administrators.
SMS Administrator for the Branch	To create User and Role profiles for the branches of your bank. Will also grant access to the various functions to the Users.
A Oracle FLEXCUBE user	Any user of Oracle FLEXCUBE whose activities are traced by the SMS module.



















1.1.2 Abbreviations


Abbreviation	Description
FC	Oracle FLEXCUBE
AEOD	Auto End of Day
BOD	Beginning of Day
EOD	End of Day
EOTI	End of Transaction Input
EOFI	End of Financial Input
The System	This term is always used to refer to Oracle FLEXCUBE

Abbreviation	Description
SI	Standing Instructions
MM	Money Market

1.2 Glossary of Icons

This User Manual may refer to all or some of the following icons.

Icons	Function
	New
	Copy
	Save
	Delete
	Unlock
	Print
	Close
	Re-open
	Reverse
	Template
	Roll-over
	Hold
	Authorize
	Liquidate
	Exit
	Sign-off
	Help
	Add

Icons	Function
	Delete

Refer the Procedures User Manual for further details about the icons.

1.2.1 Related Documents

The Procedures User Manual

2. Security Management

2.1 Introduction

Controlled access to the system is a basic parameter that determines the robustness of the security in banking software. In Oracle FLEXCUBE, we have employed a multi-pronged approach to ensure that this parameter is in place.

Only Authorized Users Access the System

First, only authorized users can access the system with the help of a unique User ID and a password. Secondly, a user should have access rights to execute a function.

User Profiles

The user profile of a user contains the User ID, the password and the functions to which the user has access.

Restricted Number of Unsuccessful Attempts

You can define the maximum number of unsuccessful attempts after which a User ID should be disabled. When a User ID has been disabled, the Administrator should enable it. The password of a user can be made applicable only for a fixed period. This forces the user to change the password at regular intervals thus reducing security risks. Further, you can define passwords that could be commonly used by a user as Restrictive Passwords at the user, user role and bank level. A user cannot use any password that is listed as a Restrictive Password at any of these levels.

Restricted Access to Branches

You can indicate the branches from where a user can operate in the Restricted Access screen.

All Activities Tracked

Extensive log is kept of all the activities on the system. You can generate reports on the usage of the system anytime. These reports give details of unsuccessful attempts at accessing the system along with the nature of these attempts. It could be an invalid password attempt, the last login time of a user etc.

Audit Trail

Whenever a record is saved in the module, the ID of the user who saved the record is displayed in the 'Input By' field at the bottom of the screen. The date and time at which the record is saved is displayed in the Date/Time field.

A record that you have entered should be authorized by a user, bearing a different login ID, before the EOD is run. Once the record is authorized, the ID of the user who authorized the record will be displayed in the 'Authorized By' field. The date and time at which the record was authorized is displayed in the 'Date/Time' field positioned next to the 'Authorized By' field.

The number of modifications that have happened to the record is stored in the field 'Modification Number'. The Status of the record whether it is Open or Closed is also recorded in the 'Open' checkbox.

2.2 Setting up Parameters at the Bank Level

Certain parameters related to security management should be defined at the bank level. These parameters will apply to all the users of the system. Examples of such parameters are the number of invalid login attempts after which a user-id should be disabled, the maximum and minimum length for a password, the number of previous passwords that should not be used, the interval at which the password should be changed by every user, etc.

You can invoke the 'SMS Bank Parameters Maintenance' screen by typing 'SMDBKPRM' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The screenshot shows a web-based application window titled "SMS Bank Parameters Maintenance -- Web Page Dialog". The interface is organized into several sections:

- Bank Level Parameters:** Includes fields for "Head Office", "Site Code" (with a red asterisk), and "Activation Key".
- Password Length (characters):** Includes "Maximum" and "Minimum" fields.
- Invalid Logins:** Includes "Cumulative" and "Successive" fields.
- Parameters:** A large section containing:
 - Fields for "Password Reptitions", "Force Password change after", "Minimum Days between Password Changes", and "Dormancy Days".
 - Checkboxes for "Force Password change for a new user/Reset", "Display Legal Notice", and "Password has Capital Letters?".
 - Fields for "Intimate User (before Password expiry)", "Archival Period in Days", "Maximum Consecutive Repetitive Characters", "Maximum Number of Alpha Characters in Password", "Minimum Number of Alpha Characters in Password", "Maximum Number of Numeric Characters in Password", "Minimum Number of Numeric Characters in Password", "Maximum Number of Special Characters in Password", and "Minimum Number of Special Characters in Password".

At the bottom of the window, there are three tabs: "Branch Restrictions", "Password Restrictions", and "Fields". Below the tabs is a footer area with fields for "Input By", "Authorized By", "Date Time", "Modification Number", "Authorized", and "Open", along with an "Exit" button.



You can modify the Bank Parameters only when the Head Office branch is in the transaction input stage.

2.2.1 Invalid Logins

You can specify the allowable number of times an invalid login attempt is made by a user. Each user accesses the system through a unique User ID and password. While logging on to the system, if either the User Id or the Password is wrong, it amounts to an invalid login attempt.

You can stipulate the allowable number of cumulative invalid attempts made during the course of a day, as well as the allowable number of consecutive or successive invalid attempts made at a time. In either case, if the number of invalid attempts exceeds the stipulated number, the user ID is disabled.

By default, the allowable number of cumulative invalid attempts is six, and the allowable number of consecutive invalid attempts is three. You can change the default and specify the allowable number of attempts in each case. You can specify an allowable number for cumulative attempts between 6 and 99, and for consecutive (successive) attempts, between 3 and 5.

Once specified, you can change the allowable number of cumulative or consecutive login attempts, provided you do so only at a time when no users are logged in to the system.

2.2.2 Specifying Parameter

Archival Period in Days

You can specify the period (in calendar days) for which the audit trail details of system security related activities (such as usage of the system by a user, activities by the system administrator, etc.) should be maintained. The system defaults to a value of 30, which you can change.

You can specify an archival period that is greater than or equal to 7 calendar days.

Dormancy Days

Oracle FLEXCUBE allows you to automatically disable the profile of all the users who have not logged into the system for a pre-defined period of time. A user ID is considered dormant if the difference between the last login date and the current date is equal to or greater than the number of 'Dormancy Days' that you specify in this screen. This is reckoned in calendar days i.e. inclusive of holidays.

All dormant users (whose home branch is same as the current branch) are disabled during the end of day run at the current branch.

2.2.3 Specifying Warning Screen Text

Warning Screen Text

At your bank, you may require a warning message containing legal requirements and security policy to be displayed to all users before allowing them to login to Oracle FLEXCUBE.

You can specify the text (content) of such a message, in the Warning Screen Text field. This message will be displayed soon after a user launches the Oracle FLEXCUBE login screen. The user will be allowed to continue with the login process only after he clicks on the OK button on the message window.

You can modify the contents of the message only during the transaction input stage. The changes will come into effect during the next login by a user. The maximum size of the warning message is '1000' characters.



You will be allowed to specify the contents of the warning message only if the 'Display Legal Notice' option is enabled.

2.2.4 Specifying Parameters for User Passwords

You can specify the following parameters that would govern user passwords:

Password Length (characters)

You can indicate the range of length (in terms of number of characters) of a user password. The number of characters in a user password is not allowed to exceed the maximum length, or fall below the minimum length that you specify here.

The minimum length defaults to 6, and the maximum length to 11. You can change the defaults and specify the required range. If you do so, you can specify a minimum length between 6 and 15 characters, and a maximum length between 10 and 15 characters. The minimum length that you specify must not exceed the maximum length that you have specified.

Force Password Change after

The password of a user can be made valid for a fixed period after which a password change should be forced. In the 'Force Password Change after' field, you can specify the number of calendar days for which the password should be valid. After the specified number of days has elapsed for the user's password, it is no longer valid and a password change is forced.

The number of calendar days defined here will be applicable for a password change of any nature - either through the 'Change Password' function initiated by the user or a forced change initiated by the system.

The system defaults to a value of 30, which can be changed. If you change it, the number of days you specify here should be between 15 and 180 days, inclusive.

Password Repetitions

You can stipulate the number of previous passwords that cannot be set as the new current password, when a password change occurs.

The system defaults to a value of three (i.e., when a user changes the user password, the user's previous three passwords cannot be set as the new password). You can change the default, and if you do, you can specify a number between one and five, inclusive.

The following example illustrates how this works.

Example

While setting up the Bank Level Parameters, you have given a value of '2' in the Password Repetitions field. Mr. Smith is a user of the system with the following details:

USER ID SMITH

Password STEELE

If Mr. Smith wants to change his password, he should invoke the Change Password screen. He cannot choose his old password (STEELE) again. He now enters his new password as SMITHS.

Smith wants to change his password for the second time. As the last two passwords cannot be used (Password Repetitions = 2 in the Bank Level Parameters table), he cannot enter either STEELE or SMITHS as his new password. He should enter a different password.

The number you specify here should be greater than or equal to 1 and less than or equal to 5.

Minimum Days between Password Changes

You can specify the minimum number of calendar days that must elapse between two password changes. After a user has changed the user password, it cannot be changed again until the minimum number of days you specify here have elapsed.

Intimate Users (before password expiry)

The number of days for which a password is to be valid is defined in the 'Force Password Change' after field. You can also indicate the number of working days before password expiry that a warning is to be issued to the user. When the user logs into the system (the stipulated number of days before the expiry date of the password), a warning message will continue to be displayed till the password expires or till the user changes it.

By default, the value for this parameter is two (i.e., two days before password expiry). You can change the default if required. If you do, you can specify a number greater than zero and less than or equal to five.

Example

The value specified in the Intimate User (Before Password Expiry) field is 2 and a user's password is due to expire on 31/01/09. The warning message is displayed on 29/01/09 and 30/01/09 whenever the user logs in.

Force Password change for a new user/Reset

You can indicate whether a new user should be forced to change the user password during the first login after the profile is created. If you indicate so, when a new user logs in for the first time after the profile has been created, a password change will be forced by the system.

2.2.5 Placing Restrictions on User Passwords

You are allowed to place restrictions on the number of alpha and numeric characters that can be specified for a user password.

Maximum Consecutive Repetitive Characters

You can define the maximum number of allowable repetitive characters occurring consecutively, in a user password. This specification is validated whenever a user changes the user password, and is applicable for a password change of any nature - either through the 'Change Password' function initiated by the user or a forced change initiated by the system.

Example

The value specified in the Maximum Consecutive Repetitive Characters field is 3 and a user decides to change his password to STUDDDD123. The System will not allow this password change as the Maximum Repetitive Characters value has exceeded in the recurrence of 'D' in the password.

Minimum/Maximum Number of Alpha Characters in Password

You can define the minimum and maximum number of alpha characters allowed in a user password. The system validates these specifications only when a user chooses to change the password.

If you do not specify the limits, the following default values will be used:

- Minimum No of Alpha Characters = 0
- Maximum No of Alpha Characters = Maximum Password Length

Minimum/Maximum Number of Numeric Characters in Password

Likewise, you can also define the minimum and maximum number of numeric characters allowed in a password. The system will validate the password only when a user chooses to change his password.

If you do not specify the limits, the following default values will be used:

- Minimum No of Numeric Characters = 0
- Maximum No of Numeric Characters = Maximum Password Length



You can specify any number between 0 and 11 in each of these fields. However, you must ensure that the sum total of the minimum number of alpha characters and the maximum number of numeric characters is less than or equal to the 'Maximum Password Length'. Similarly, the sum total of the maximum number of alpha characters and the minimum number of numeric characters should be less than or equal to the 'Maximum Password Length'.


2.2.6 Password Restrictions

You can define a list of passwords that cannot be used by any user of the system in the bank. This list, called the Restrictive Passwords list can be defined at three levels:

- At the bank level (applicable to all the users of the system)
- At the user role level (applicable for all the users assigned the same role)
- At the user level (applicable for the user)

The list of Restrictive Passwords should typically contain those passwords the users are most likely to use: the name of your bank, city, country, etc. For a user role, it could contain names, or terms, that are commonly used in the department. At the user level, it could contain the names of loved ones, etc. By disallowing users from using such common passwords, you can reduce the risk of somebody other than the user knowing the password.

Click 'Password Restrictions' button to define restricted passwords at the bank level that should not be used by any user of the bank.

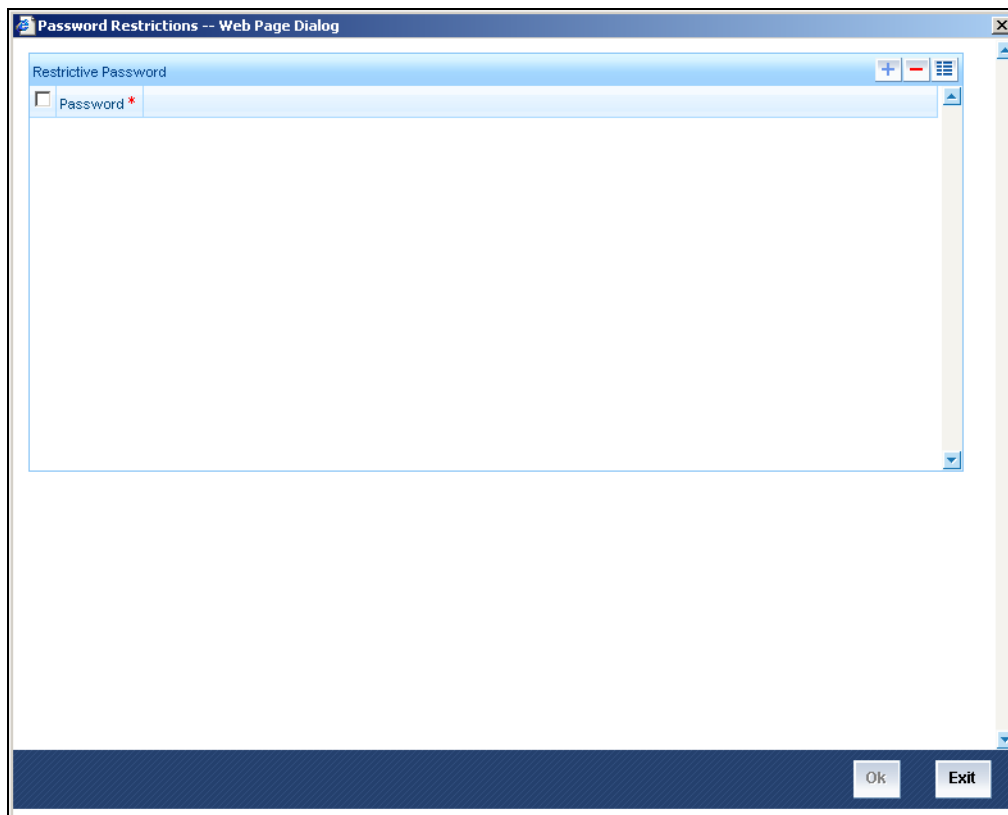

To add a password to the 'Password' list, click add icon. To select a record in the list use the check box beside it.

After you listed the restrictive passwords in the 'Password' list, click 'Ok' button to save the password restrictions.


2.3 Branch Restrictions for Specific Applications

You can restrict administrators of branches from performing operations related to specific functions in branches other than their home branch. These are referred to as 'Branch Restrictions for Specific Applications'. You can also maintain a list of branches in which the administrator of a certain branch is allowed / restricted to perform specific operations. These other restrictions are referred to as 'Common Branch Restrictions'.


According to the restrictions you maintain, the administrator of a specific branch is allowed to perform specific operations in the administrator's home branch, as well as any branch found in the list of allowed branches.

According to your requirements, the implementers at your installation configure a list of the specific functions or applications for which you might wish to maintain such branch restrictions. You can maintain branch restrictions for each of these applications, as required.

In the 'Branch Restrictions' screen, you can specify the applications for which you intend to maintain branch restrictions. To invoke the 'Branch Restrictions' screen, click 'Branch Restrictions' button in the 'SMS Bank Parameters Maintenance' screen.

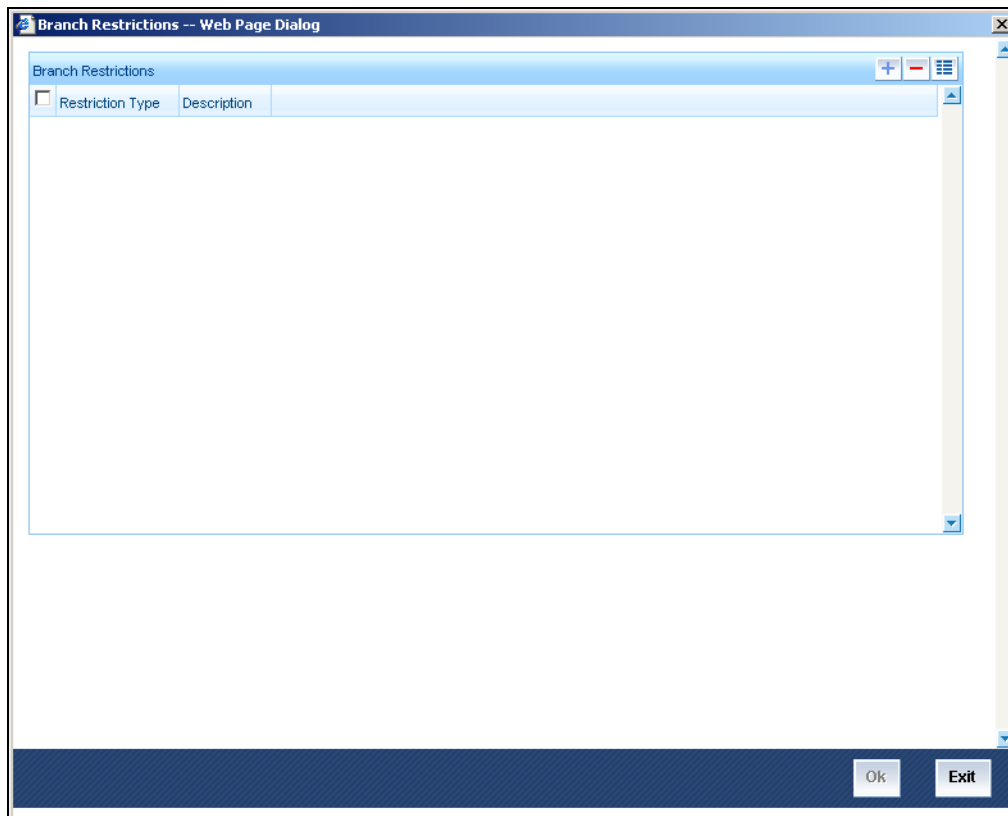

For maintaining the Branch Restrictions for an application, click add icon to add a record to the list. Then click on each field's option list to select the application for which you intend to maintain branch restrictions.

 You cannot create common branch restrictions for an application that you have not specified in this screen.

Example

You wish to restrict branch administrators from performing operations in the following applications, in branches other than their home branch:

- User administration (creation, modification and viewing of user profiles)
- End of Day (EOD) operations
- Maintaining rules for ICCF components
- Maintaining branch restrictions for IC rates

In the Restriction Type field in the SMS Branch Restriction Type screen, select USRADMIN (to maintain branch restrictions for User Administration), EODOPERATN (to maintain branch restrictions for EOD operations); ICCFRULE (to maintain branch restrictions for maintaining ICCF rules) and ICRATES (to maintain branch restrictions for IC rates).

2.4 Creating Common Branch Restrictions

To recall, in the Branch Restrictions maintenance, you have identified those applications and operations, for which you intend to maintain branch restrictions. Having done this, you must proceed to create the appropriate common branch restrictions for each branch administrator. You can maintain these restrictions in the common 'Branch Restrictions' screen. You can invoke this screen by typing 'SMDBRRES' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.



This can be done only at the head office branch.

The screenshot shows a web-based dialog window titled "Branch Restrictions -- Web Page Dialog". The window contains several input fields and a table. At the top, there are two dropdown menus: "User Branch *" and "Restriction Type *", each with a "Description" label and a help icon. Below these is a "Branch Restriction" section with two radio buttons: "Allowed" and "Disallowed", with "Disallowed" selected. In the center, there is a table titled "Disallowing Branches" with columns "Branch Code *" and "Description". The table is currently empty. At the bottom of the window, there is a "Fields" section with a grid of input fields: "Input By" (DOCUMENT2), "Date Time", "Modification Number", "Open" (checked), "Authorized By", "Date Time", "Authorized" (unchecked), and a "Cancel" button.

In this screen, you create common branch restrictions by specifying the information described below.

User Branch

You must first select the home branch of the administrator for which you are maintaining common branch restrictions, in the User Branch field.

Restriction Type

You must also indicate the specific application for which you wish to maintain common branch restrictions, for the administrator of the selected branch. You can only specify a restriction type that has been maintained in the SMS Branch Restriction Type maintenance.

Branch Restriction

You maintain common branch restrictions by creating a list of branches for each administrator, in which the administrator will either be allowed / disallowed access to perform operations related to the selected application (Restriction Type). You can maintain either an 'allowed' or a 'disallowed' restriction list.

The common branch restrictions you maintain are applicable for operations in the selected application (Restriction Type) in the home branch (User Branch) of the administrator and the list of allowed / disallowed branches.

Example

You have created the following common branch restrictions:

Home Branch	Restriction Type	Allowed Branches
000	USRADMIN	000, 001, 002, 005
001	USRADMIN	001, 006
002	ICCFRULE	002, 005, 006
005	EODOPERATN	002, 005, 006
006	ICRATES	004, 005, 006

The administrator of branch 000 can perform user administration for the branches 000, 001, 002 and 005, but not for 006. Similarly, the administrator of branch 002 can create ICCF rules in branches 002, 005 and 006, but not in branches 000 and 001.

When the administrator of branch 000 attempts to create a new user in the User Profile screen, the branches available in the Home Branch field in the screen will be 000, 001, 002 and 005.



Note the following:

- The administrator of the head office branch is allowed to perform all operations in any of the other branches
- When a new branch is created, it must be manually added to the allowed / disallowed list, as required
- For those applications (Restriction Types) that you have specified in the SMS Branch Restriction Types maintenance, you must create the appropriate common branch restrictions in the Common Branch Restrictions screen. If no restrictions have been created in the Common Branch Restrictions screen for a specific branch for an application chosen in the SMS Branch Restriction Types maintenance, operations pertaining to the application will not be allowed from that branch.

- To allow the administrator of a certain branch to perform operations pertaining to a specific application for all branches, you can either maintain an allowed list with all branches selected or maintain a disallowed list with none of the branches selected.

2.5 Defining Functions

Any function that is a part of the system should be defined through the 'Function Description Maintenance' screen before it is available for execution. Mostly, our professionals carry out this activity. You can modify the description of the function that appears in the Application Browser through this screen. You can invoke this screen by typing 'SMDFNDS' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The following details are captured here:

Function Identification

Select the Function id for which you want to give access rights, from the option list.

Module

Select the module to which the Function id has to be mapped. All Functions are mapped to specific modules.

Name

Specify the executable to open the Function Id.

Type

Select the type of Function Id here from the drop-down list. The options available are:

- Form
- Report

- Stored Procedure

Menu Head

Select the menu head from the drop-down list. The options available are:

- Module
- Report

You can then specify the rights to the different actions for the functions by checking against the action. These actions can be:

- Static Maintenance Functions
 - New (Define a new record)
 - Copy (Copy details of an existing record)
 - Delete (Delete an existing record)
 - Close (Close an existing record)
 - Unlock (to amend an existing record)
 - Reopen (Reopen an existing record)
 - Print (Print the details of selected records)
 - Authorize (Authorize any maintenance activity on a record)
- Contracts and on-line transaction processing
 - Reverse (reverse an authorized contract)
 - Rollover (to manually roll over an existing contract into a new contract)
 - Confirm (to indicate the counterparty or broker confirmation of a contract)
 - Liquidate (to manually liquidate a contract)
 - Hold (to put a contract on hold)
 - Template (to save a contract as a template)
 - View (to see the details of the contract)
- Reports
 - Generate (to generate reports)
 - View (view the reports)
 - Print (print the reports)

To delete the access rights given for a Function, select the Function ID and click delete icon.

Custom Function ID

Specify a custom function id which can be used as an alias for the function id selected.

If you input this value in the field at the top right corner of the Application tool bar and click on the adjoining arrow button, system will check for the mapped function id and will launch that function id screen.

Tanking Required

Check this box to indicate that the maintenance records that are created or modified in the system, for the function Id specified here, need to be tanked till they get authorized.

The new or the modified records are written to the static tables only after authorization.

For more details on tanking of maintenance records refer the Core Services user manual.

Holiday Check

Check this box to allow/disallow certain privileges to the customer on calendar holidays. The checkboxes 'Retail Transaction Allow' and 'Corporate Transaction Allow' will be enabled only if this is checked.

This feature supports only the following screens:

- 1001 Cash Withdrawal
- 1005 Miscellaneous GL Transfer
- 1006 Funds Transfer Request
- 1008 Miscellaneous Customer Debit
- 1401 Cash Deposit
- 1408 Miscellaneous Customer Credit
- TDMM Multimode TD Account Opening
- 1317 Redemption by Transfer in Multimode
- 7551 Book Shortage
- 7552 Book Overage
- BCFT Transfer Cash from Teller
- FRDT Force transfer Request (new screen from lot1a)
- DEDJRMLT Journal Multi Offset Input
- DEDJRONL Journal Single Entry Input
- DEDLTRON Teller transaction
- CLDACCNT CL contract input
- CLDCMTMT Commitment Acc. Details
- CLDPYMNT CL Payment
- CLDMNDSB Disbursement
- CLDMROLL Manual Roll over
- CLDRENOG Re-Negotiation
- CLDNOVDT Re-Assign
- STDCIF Customer Creation
- STDCUSAC Customer Account / TD Account Creation
- ICDREDMN TD Redemption
- ICDPMNTS Recurring Deposit Payment Input
- ICDPMREV Recurring Deposit Payment Reversal

Retail Transaction Allow

Check this box to allow/disallow certain privileges to the retail customer on calendar holidays.

Corporate Transaction Allow

Check this box to allow/disallow certain privileges to the retail customer on calendar holidays.

Available

Check this box to make the Function accessible in the Oracle FLEXCUBE menu. The definition of the menu would be as specified in the Column at the bottom of the 'Function Description Maintenance' screen. If this box is unchecked, then this screen will not be accessible from the menu even if it is selected for the Role that is assigned to the user.

Automatic End Of Day aware

Check this box to consider the Function for an AEOD run.

Log Event

Check this box to enable the event log for a particular Function ID, Oracle FLEXCUBE maintains an extensive log of the activities of every user. This can later be used for reporting on the user activities.

Cust Access

Check this box to make the Function available to Users who are classified as Customers.

Auto authorization

As configured for your installation according to your requirement, automatic authorization is applicable for a pre-shipped list of functions. For those functions, you can revoke the applicability of automatic authorization, if required.

It is not possible to indicate the applicability of automatic authorization for any other functions than those pre-shipped functions configured for your installation.

Head Office Function

Check this box to enable the Function to be handled only by the users of the Head Office. Users of the other branches would be only allowed to view the Function.


2.5.1.1 Defining the Menu

The Oracle FLEXCUBE menu can be defined in the Function Description section.

You can define menu appearance for a given Language. The Menu can only be drilled down up to two sub menu levels.

Example

For Language Code 'ENG' if the Main menu value is given as 'Security Management', Sub Menu1 as 'Maintenance' and Sub Menu2 as 'Function Description' for Function id SMDFNDSC then on the Oracle FLEXCUBE menu it would appear as follows:

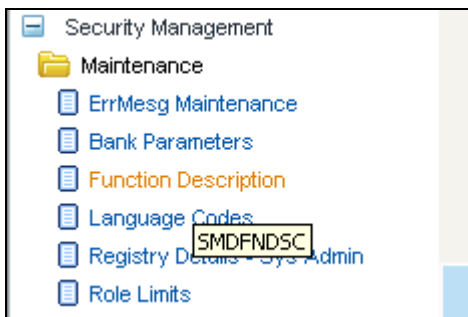

2.6 Defining a User Role

It is likely that users working in the same department at the same level of hierarchy need to have similar user profiles. In such cases, you can define a Role Profile that includes access rights to the functions that are common to a group of users. A user can be linked to a Role Profile by which you give the user access rights to all the functions in the Role Profile.

2.6.1 The Procedure for Defining Role Profiles

Role profiles are defined in the 'Role Maintenance' screen. You can invoke this screen by typing 'SMDROLDF' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The screenshot shows a web browser window titled "Role Maintenance -- Webpage Dialog". The main content area has two text input fields: "Role Identification *" and "Role Description". Below these fields is a horizontal menu with buttons for "Maintenance", "Reports", "Batch", "Online", "Process Stage Rights", "Acc Class Restriction", "Branch Restriction", "Rights", "Password Restriction", "Web Branch", "Branch Limit", "Fields", and "Function Limits". At the bottom of the window, there are fields for "Maker", "Checker", "Date Time", "Mod No", "Authorized", "Open", and a "Cancel" button.

2.6.2 Defining Functions for a Role Profile

After you have defined the basic attributes of a role profile (the Role Identification, Description, Branch Role) you should define the functions to which the role profile has access. The various functions in the system fall under different categories.

To assign a function to a role in the 'Role Maintenance' screen, you must click the function category button to which the function belongs. The function category buttons in the 'Role Maintenance' screen are as follows:


- **Maintenance** - Functions related to the maintenance of static tables
- **Reports** - Functions related to the generation of reports in the various modules
- **Batch** - Functions related to the automated operations (like automatic liquidation of contract, interest, etc.)
- **On Line** - Functions related to contract processing
- **Process** - Functions related to workflow
- **Acc Class Restriction** – Functions related to restricting the role from using certain account classes
- **Branch Restriction** – Functions related to restricting the association of roles to certain branches.
- **Rights** – Functions related to giving necessary rights for perform various operations in respect of incoming and outgoing messages

- **Password Restriction** – Functions related to creating a list of words that the users, having a certain Role are likely to use as Passwords and on which restrictions can be placed.
- **Web Branch** – Functions related to the Teller Module where the Role is marked as a 'Branch Role'.
- **Branch Limit** – Function related to setting up Branch limits.
- **Fields** – Functions related to User Defined Fields.
- **Function Limits** – Functions related to branch-wise authorization limits

The lower portion of the Role Description screen has buttons corresponding to each of the above function categories. Click on a button to view the corresponding screen.

2.6.3 Branch Restriction

You can specify the branches to which the role profile is associated, and for which it is available. Click 'Branch Restriction' button in the 'Role Maintenance' screen. The 'Branch Restriction' screen is opened.

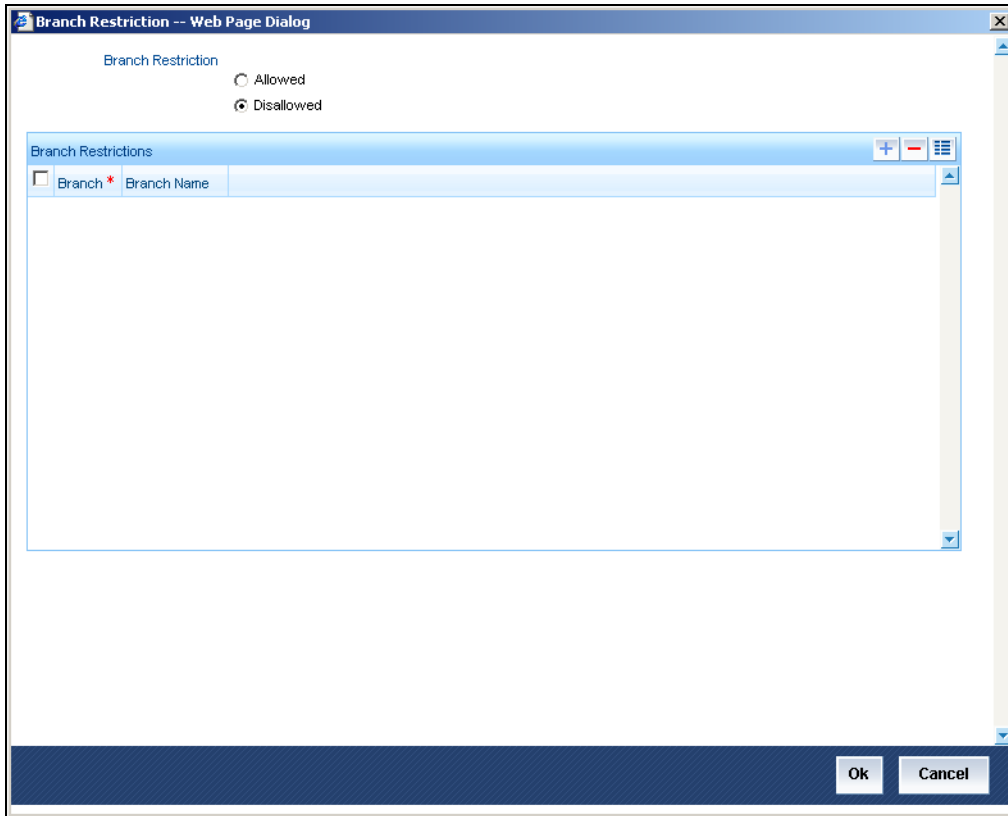

You can maintain a list of branches for which the role is either:

- Allowed
- Disallowed

Choose the 'Allowed' option to maintain an allowed list, and the 'Branch Restrictions' list will show the list of allowed branches. Choose the 'Disallowed' option, to maintain a disallowed list of branches.

If you maintain an 'Allowed' list, then the role profile will be available only for those branches that you specify in the Branch Restrictions list. Similarly, if you maintain a 'Disallowed' list, then the role profile will not be available only for those branches that you specify in the Branch Restrictions list.

After choosing either the 'Allowed' or 'Disallowed' option, click add icon to add a record under the 'Branch Restrictions' list. Into each added record field, select the required branch from the adjoining option list.

2.6.4 Account Class Restriction

You can restrict the role from using certain account classes that are maintained in Oracle FLEXCUBE. Click 'Acc Class Restriction' to specify the account class restrictions. The 'Account Class Restriction' screen is displayed.

Account Class *	Description
-----------------	-------------


You can either allow or disallow association of the role with certain account classes. Subsequently, specify the account classes, which have to be restricted for the role.

After choosing the 'Allowed' or 'Disallowed' option, click add icon to add a record under the 'Account Class Restrictions' list. Into each added record's field, select the required account class from the adjoining option list.

2.6.5 Rights

For a role profile, you can specify the necessary rights to perform various operations in respect of incoming and outgoing messages, in the Messaging module of Oracle FLEXCUBE. You can grant specific permissions for operations on messages, as well as allot the messaging queues to which the role has access.

In the 'Role Maintenance' screen, click 'Rights' button to open the 'Rights' screen. Here you can grant the rights pertaining to the Messaging module, to the role.

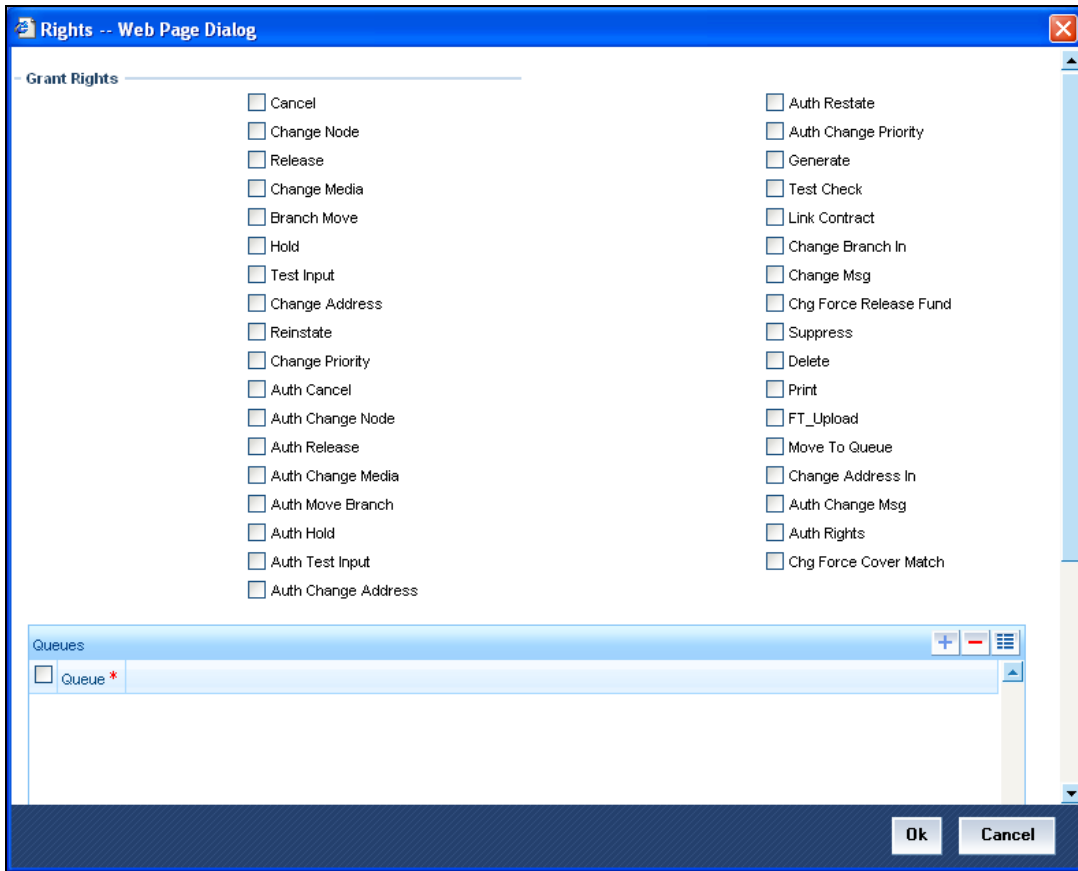

Check against the messaging operations for which you want to grant the permission.

Granting rights pertaining to operations on messages

You can grant permissions for the following operations on outgoing messages:

- Generating a message
- Printing a message
- Placing a message on hold
- Releasing a message on hold
- Canceling a message
- Inserting a testword
- Reinstating a message
- Changing the priority of a message
- Request information relating to Status of a message
- Request cancellation of a message
- Changing the media through which a message is transmitted
- Changing the address to which a message is to be sent
- Moving a message to another branch
- Changing the node from which a message should be generated

- Authorization of any of the operations listed above, in respect of outgoing messages

You can grant permissions for the following operations on incoming messages:

- Printing a message
- Authorizing a testword
- Routing a message to a queue
- Associating a message with a contract
- Uploading incoming messages
- Making changes (edit) incoming messages. You can also grant permissions for changing the branch and the address in incoming messages
- Authorizing changes made to incoming messages
- 'Force Release' payment message transactions with 'Funding Exception' status and insufficient funds
- Suppressing a message
- Deleting a message

Granting each of these permissions in the Rights screen enables the user having this role to perform the corresponding functions in the Incoming and Outgoing Message Browsers. The appropriate button in the Browser, in each case, is enabled for the users associated with the role.

For details regarding each of these operations in respect of both incoming and outgoing messages, consult the Messaging System User Manual.

Apart from these functions, you can also grant permission for the cover matching function for incoming payment message transactions.

For details regarding uploading incoming payment transaction messages and cover matching for incoming payment transactions, refer the 'Straight Through Processing' chapter in the Funds Transfer user manual.


Grant Queues

You can grant the message queues to which the role has access, and in which users associated with the role can perform messaging operations according to the messaging rights you have assigned. The required queues can be selected and listed in the 'Queues' list under the 'Grant Queues' section.

2.6.6 Password Restriction

System allows you to create a list of words that the users, having a certain Role are likely to use as Passwords and on which restrictions can be placed. The list of Restrictive Passwords should contain those passwords that the users are most likely to use: the name of your bank, city, country, etc. For a user role, it could contain names, or terms, that are commonly used in the department. At the user level, it could contain the names of loved ones, etc. By disallowing users from using such common passwords, you can reduce the risk of somebody other than the user knowing the password.


Click 'Password Restriction' button to define the list of Restrictive Passwords for the role profile you are defining. Any user, who is attached to the role, cannot use a password in this list.

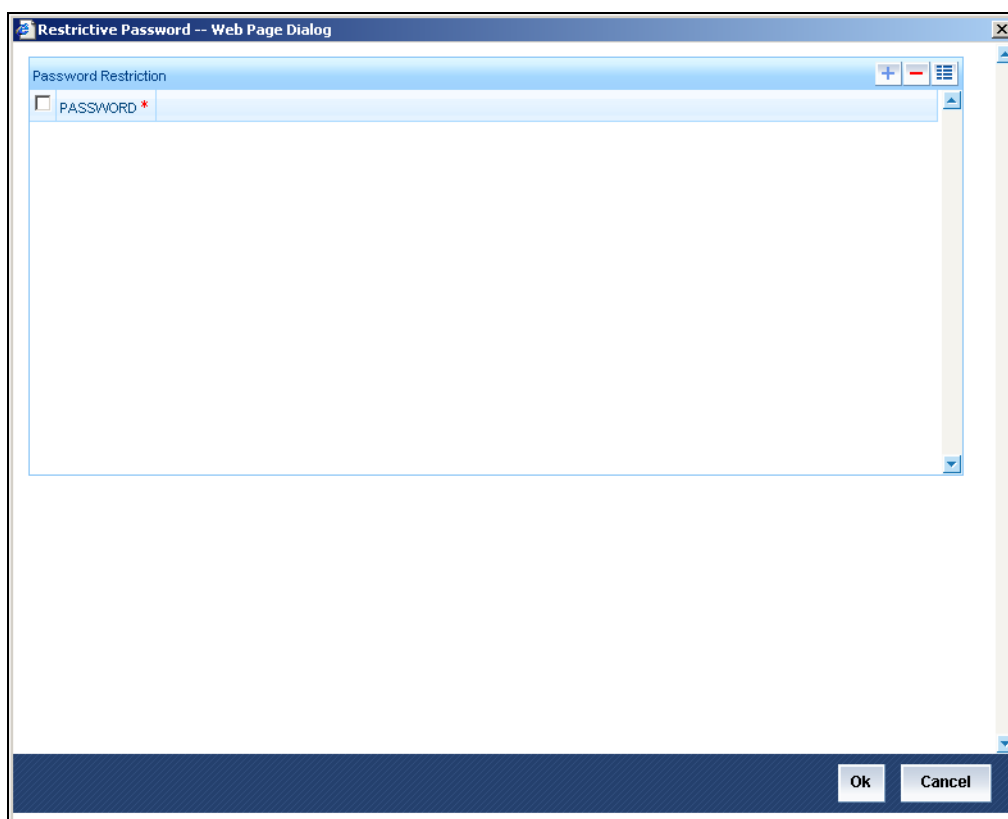

You can define only the functions that are applicable for the role and the list of Restrictive Passwords for a role. All the other attributes of a user profile should be defined when the user profile is being created.

2.6.7 Function Limits

You can maintain authorization limits for transactions across branches for each role being defined. Click 'Function Limits' button and invoke the 'Function Limits Maintenance' screen.

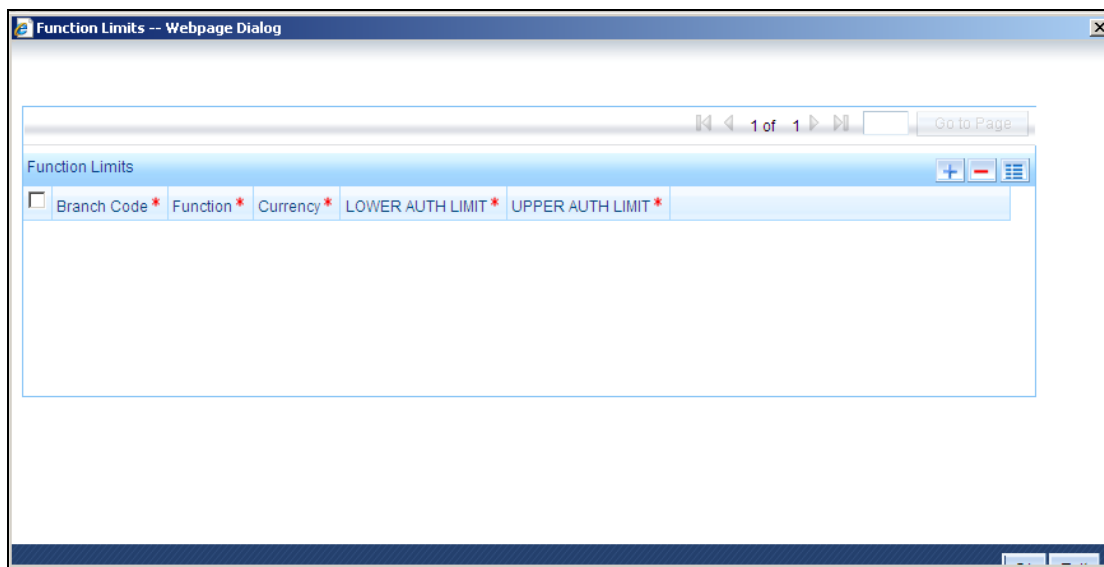

Specify the following details:

Branch Code

Specify the branch for which you want to maintain authorisation limit. The adjoining option list displays all valid branch codes maintained in the system. You can also select the appropriate one from it.

Function

Specify the function for which you want to maintain authorisation limit. The adjoining option list displays all valid function IDs available in the system. You can also select the appropriate one from it.

Currency

Specify the currency in which you want to maintain authorisation limit. The adjoining option list displays all valid currency codes maintained in the system. You can also select the appropriate one from it.

Lower Auth Limit

Specify the minimum limit for transactions that can be authorised by users mapped to this role.

Upper Auth Limit

Specify the maximum upper limit for transactions that can be authorised by users mapped to this role.

2.6.8 Copying the Role Profile of an Existing Role

Often, you may have to create a Role Profile that closely resembles an existing one. In such a case, you can copy the existing profile on to the new one.

Select 'Copy' from the Actions menu in the Application toolbar or click copy icon. A list of existing role profiles will be displayed. Click on the one you want to copy. All the details of the profile except the Role ID will be copied and displayed. Enter a unique Role ID. You can change any of the details of the profile before saving it.

2.6.9 Closing a Role Profile

A Role Profile should be closed only if there are no users linked to it. Thus, before closing a role profile, you should modify each user profile attached to it and delete the link to the role.

Select 'Close' from the Actions menu in the Application toolbar to delete an existing role profile. If the role is linked to any user, a warning message will be displayed. This message will bring your attention to the fact that the user profile to which the role is linked will not be the same if the role profile is closed.

You will be prompted to confirm the closure. The Role Profile will be closed only if you confirm the Closure.

2.6.10 Defining Roles for Oracle FLEXCUBE Branch Users

You can define a role with functions typically performed by users accessing the Oracle FLEXCUBE Branch system. To indicate a role as an Oracle FLEXCUBE Branch role, select the 'Branch Role' option in the 'Role Maintenance' screen.

2.6.11 Defining Role for Sales Team

You can set up a role for the relationship manager, team managers and business managers in your sales team and provide them with view access on required functions. You can do this using the 'Role Maintenance' screen. You can invoke this screen by typing 'SMDRDLDF' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Role Maintenance -- Webpage Dialog

Role Identification * SALESROLE
Role Description SALESROLE

Maintenance | Reports | Batch | Online | Process Stage Rights | Acc Class Restriction | Branch Restriction | Rights | Password Restriction | Web Branch
Branch Limit | Fields | Function Limits

Maker JIAO Date Time: 7/31/2011 14:24:36 Mod No 2 Authorized Exit
Checker JIAO Date Time: 7/31/2011 14:24:36 Open

Specify the following details.

Role Identification

Specify 'SALESROLE'.

2.6.11.1 Defining Functions for the Role

You need to allow 'View' option alone for all customer, customer account and query functions.

2.7 Defining a Limits Role

Oracle FLEXCUBE allows you to place restrictions on the amount specified by a user when processing a transaction. You can also restrict users with authorization rights from authorizing transactions with amounts beyond a specific limit.

To achieve this, you can define Input Limits and Transaction Authorization Limits for a user at the time of maintaining a User Profile in Oracle FLEXCUBE. The input limits and authorization limits will be made applicable to the following types of transactions:

- Payment transactions (FTs)
- Single Entry Journal transactions
- Multi Offset transactions
- Teller transactions

Oracle FLEXCUBE allows you to maintain different Role Limits, which can then be linked to a user profile. The limits defined for the attached role will be applicable to the user profile to which it is linked. The Role Limits are maintained in the 'Role Limits Maintenance' screen. You can invoke this screen by typing 'SMDRLMNT' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Role Limits Maintenance -- Web Page Dialog

Role Identification * BC_USER_ROLE4
Description BC USER ROLE4 CNY

Limits Currency * CNY
Input Limit _____
Authorization Limit _____

PRODUCT ROLE LIMIT

Product Role Limit Details					
<input type="checkbox"/>	Component Order	Module	Product Code	Input Limit	Authorization Limit
<input type="checkbox"/>	1	BC	ALL	2500.00	2000.00

UDF

Input By TEMP Date Time 12/5/2008 13:24:16 Modification Number 3 Open
Authorized By TEMP Date Time 12/5/2008 13:24:16 Authorized Exit

Role Identification


The Id that you specify here will uniquely identify the Role Limit throughout the system. A Role Limit is distinct from the User Role, in that the Role Limit is designated for the specific purpose of enabling you to set transaction amount processing limits that you wish to impose on a user.

Description

You can specify a brief description for the Role Limit being defined.

Limits Currency

Here you will indicate the currency in which the limits (transactions amounts) will be expressed. If a user captures a transaction in a different currency, Oracle FLEXCUBE will convert the transaction amount to the Limits Currency and then perform the validations.

 For currency conversions, the system will use the mid-rate of the STANDARD exchange rate type maintained in your system.

Input Limit

Specify the maximum amount that a user (to which the limits role is associated) is allowed to process while entering a transaction.

Authorization Limit

Specify the maximum amount that a user (to which the limits role is associated) is allowed to process while authorizing a transaction.


2.7.1.1 Working of the Limits

Input Limit

If the transaction amount exceeds the input limit maintained for the Role, the system displays an override message. Selection of the 'OK' button in the message window will allow the user to continue despite exceeding the limits. If the user selects the 'Cancel' button, he will not be able to continue with transaction processing.

Authorization Limit

If the transaction amount that the user is attempting to authorize exceeds the authorization limit maintained for the Role, the system displays an override message. Selection of the 'OK' button in the message window will allow the user to continue with the authorization despite exceeding the limits. If the user selects the 'Cancel' button, he will not be able to continue with authorizing the transaction.

 The role limits (input and authorization) would apply to a user with which the limits role has been associated, for operations in any of the modules listed above (that is, payment transactions, single entry journal transactions, multi-offset transactions).

Product Role Limit

Check this box to enable Module and Product wise Role Limits. If you check this box system, checks the user limits for all financial transactions in the bank. If you leave this box unchecked system disables 'Product Role Limit' definition.

2.7.1.2 Defining Product Role Limit

You can define role limits module-wise and product-wise, for input and authorization.

Module

Select the module for which you want to define the role limits.

Product Code

Select the product code of the module.

Input Limit

Specify the input limit for the selected module and product code.

Authorization Limit

Specify the authorization limit for the selected module and product code.



Note the following:

- The system follows the following hierarchy for deciding the limit for input or authorization:
 - Specific module and product
 - Specific module and all products
 - All modules and all products
- This limit is applicable for individual transactions and contingent entries as well and the limit is based on the transaction date.
- User defined limits are applicable for input and authorization of newly booked fresh contract for all modules.

2.8 Defining User Holidays

You can block a specific user login for a certain time frame by defining holiday slots for that user profile. You can define holiday slots through the 'User Holiday Maintenance' screen. You can invoke this screen by typing 'SMDUSHOL' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button. The 'User Holiday Maintenance' screen is shown below.

A screenshot of a web application dialog box titled "User Holiday Maintenance -- Web Page Dialog". The dialog has a blue header bar with standard window controls (minimize, maximize, close). The main content area is white and contains several input fields: "Branch Code" with the value "CHO", "Leave From" with the value "11/11/2009", "Remarks" with the value "Leave", "User ID" with the value "MAHADEV", and "Leave To" with the value "11/10/2009". Each date field has a small calendar icon to its right. At the bottom of the dialog, there is a dark blue footer bar containing labels for "Maker", "Checker", "Date Time", "Mod No", and two checkboxes labeled "Authorized" and "Open". A "Cancel" button is located on the right side of the footer bar.

Specify the following details:

Branch Code

The branch code of the user selected in the 'User ID' field is displayed here.

User ID

Specify the user ID of the user for whom you want to define the holiday period. The adjoining option list displays all the valid user profiles maintained in the system. You can select the appropriate one.

Leave From

Select the start date for the holiday period from the adjoining calendar.

Leave To

Select the end date for the holiday period from the adjoining calendar.

The user will not be allowed to log in within the specified holiday range.

Remarks

Specify a brief description for the holiday.

You can maintain multiple holiday slots for a user but the system will not allow including a specific day in more than one slot.

2.9 Viewing Holiday Summary

You can view holiday periods maintained for any user profile in the 'Users Holiday' screen. You can also invoke this screen by typing 'SMSUSHOL' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Authorization Status	Record Status	Branch Code	User ID	Leave From	Leave To	Maker ID	Maker Dt Stamp	Checker ID	Checker D
Authorized	Open	CHO	MAHADEV	8/1/2008	8/8/2008	MAHADEV	9/1/2008	KV1	9/1/2008
Authorized	Open	CHO	MAHADEV	9/1/2008	9/12/2008	MAHADEV	9/1/2008	KV1	9/1/2008

You can query for records based on the following criteria:

- Authorization Status
- Record Status
- Branch Code
- User ID
- Leave From
- Leave To

Click 'Search' button. Based on your preferences, the system identifies all records satisfying the criteria and displays the following details for every record:

- Authorization Status
- Record Status
- Branch Code
- User ID
- Leave From
- Leave To
- Maker ID
- Maker Date Stamp
- Checker ID
- Checker Date Stamp

2.10 Defining a User Profile

A User Profile defines the activities that a user can carry out on the system. It also contains the user ID, the name through which the user will access the system and the password.

You can create User Profiles through the 'User Maintenance' screen. You can invoke this screen by typing 'SMDUSRDF' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button. The 'User Maintenance' screen is shown below.

The screenshot displays the 'User Maintenance -- Webpage Dialog' window. It is organized into three main sections: 'User Details', 'User Password', and 'Invalid Logins'. The 'User Details' section contains various input fields and radio buttons for configuring user attributes. The 'User Password' section includes fields for password management and a checkbox for forcing a password change. The 'Invalid Logins' section provides summary statistics. At the bottom, a navigation bar and a status bar are visible, containing tabs for different system modules and user information.

You can classify the user in to two:

- **Staff** - All internal users of the bank can be classified as Staff. You can include any of the functions available in the system in the user profile.
- **Branch** - This indicates a branch user. This is used to identify a branch user and branch specific user maintenance for Branch user.

2.10.1.1 Restrictions on User Profile Administration

A branch administrator can create, modify or delete user profiles only in the Head Office, Home branch of the administrator or in those branches that are allowed for the restriction type USRADMIN, in the Common Branch Restrictions.

When the administrator of a branch attempts to create a new user in the User Profile screen, the branches available in the Home Branch field in the screen are only those allowed branches maintained in the Common Branch Restrictions for restriction type 'USERADMIN'.

For details about the Common Branch Restrictions, refer the section 'Creating Common Branch Restrictions' in this user manual.

Example

You have created the following branch restrictions:

Home Branch	Restriction Type	Allowed Branches
000	USRADMIN	000, 001, 002, 005
001	USRADMIN	001, 006

The administrator of branch 000 can perform user administration for the branches 000, 001, 002 and 005, but not for 006.

When the administrator of branch 000 attempts to create a new user in the User Profile screen, the branches available in the Home Branch field in the screen will be 000, 001, 002 and 005.

Language

Select the Language in which the Users screen have to be defined, from the option list. The Language Codes maintained through the 'Language codes' screen will be available for selection.

Home Branch

By default the Current Branch is displayed here. All users have to be attached to a branch.

User Status

Select the status of the user from the options available. The options available are:

- Enabled
- Hold
- Disabled

For a user to be able to login to FLEXCUBE, his status should be set as '**Enabled**'. The field '**Status Changed on**' displays the date and time when the Status of the User was last changed.

Customer Number

For User Profiles of your choice, Oracle FLEXCUBE allows you to restrict the viewing and printing of Balances (in case of accounts) and financial details of contracts involving customers who also happen to be employees of your bank. In order to enable this option, while creating the User Profile of the employee you can link the customer number (CIF ID) of the employee with the User ID.

Tax Identifier

Specify the tax identifier code of the customer to monitor Anti Money Laundering activities.

A user with restricted access will not be able to view/print details of contracts involving the product in all Contract Functions and Contract Summary screens for the following modules:

- Teller
- Retail Teller
- Clearing
- Utility Payments
- Funds Transfer
- Payment and Collections

- The Contract Online and Cycle Due screen of SI
- Foreign Exchange (online and payment)
- The Contract Online, Value Dated Amendments and Payments Input screens of MM
- The Contract Online put, Value Dated Amendments, Payments Input and Loans Assignment screens of LD

The other functions to which the user will have restrictive rights is as follows:

- Ad-hoc loan statement generation
- Queries – Accounting Entries
- Customer Based Information Retrieval
- Limits Overrides showing account balances
- Message Browser
- Payments and Collections Message browser



In the Payments and Collection module the restriction is applicable to product categories and *not* products.

If a balance exception has occurred, the balances are not displayed for the restricted user but will be replaced by **.



The restricted users will be able to:

- View/print financial information pertaining to contracts *they have* initiated or view/print balances pertaining to *their own* accounts
- Post transactions to the staff accounts or create contracts for staff members, even if the user is restricted to view/print balances / contract information pertaining to other colleagues.
- In case of balance exception during transaction posting, the balance will not be displayed. The Exception Message will only state that the account will be 'overdrawn' on account of the transaction.
- Post transactions and view transaction information until the contract is authorized. After authorization, such users cannot access the contract

The only exception is that when the user has captured a contract, the user will be allowed to view the details till the contract gets authorized.

LDAP DN

The LDAP Details that have been maintained in the SSO screen have to be input here. Clicking on the 'Validate' button validates the LDAP details entered in the **Single Sign On**.

Time Level

The time level is allotted at two levels — at the Branch level and at the user level. The Time Level for the User is set at the User Profile.


For a user to be able to login, the time level for the user set at his User Profile should be greater than or equal to that of the system (Branch). The time level can take values between zero and nine.

Typically Time Levels are used to prevent Users from Logging into FLEXCUBE when the System is Offline either because it is running the End of Cycle operations (when it is necessary that no user be logged in). Before the EOC Operations, we increase the time level of the system so that it is higher than that of any user. The users who are logged on will be able to finish the function they are currently running. Once they log out you can then run the End of Cycle functions. These Users will now be unable to log in as their Time Levels is lesser than that of the Branch.

Last Signed On

This is a display field which shows the Date and Time of the Users last Login.

On each Sign on into the System, this field gets displayed as a Message to the User.

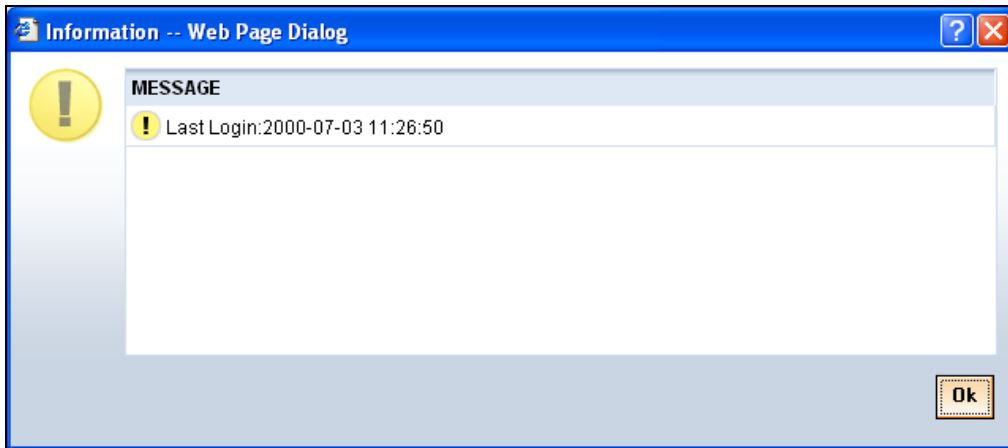

Auto Authorize

To indicate that a user is allowed to perform automatic authorization, you must enable the 'Auto Authorize' option in the User Maintenance screen.

If automatic authorization has been enabled for a function, branch and user profile, and such a user has rights for both input and authorize operations, any record maintained by such a user in the corresponding function (maintenance or online) screens will be automatically authorized when the Save operation is performed.

Example

You have enabled automatic authorization for the following branches in the Branch Parameters:

Branch	Automatic Authorization Enabled
000	Yes
001	No
002	Yes

In the Function Description maintenance, automatic authorization has been enabled for the following functions:

Function	Automatic Authorization Enabled
Customer Information Maintenance	Yes

Function	Automatic Authorization Enabled
LD Contract Online	Yes
Customer Account Maintenance	Yes
FT Contract Online	No

You have maintained automatic authorization rights for specific users in the User Profile maintenance as shown below:

User	Automatic Authorization Enabled
Ronald	Yes
George	Yes
Smith	No

You have also maintained transaction access rights for the users as shown below:

User	Branch	Function	Input access	Authorize Access
Ronald	000	Customer Information Maintenance	Yes	Yes
Ronald	001	Customer Information Maintenance	Yes	Yes
Ronald	000	FT Contract Online	Yes	Yes
Ronald	000	Customer Account Maintenance	Yes	No
George	001	LD Contract Online	Yes	Yes
George	000	Customer Account Maintenance	Yes	Yes
Smith	000	LD Contract Online	Yes	Yes
Smith	000	Customer Account Maintenance	Yes	Yes

According to your maintenance, automatic authorization would be performed as shown below:

User	Branch	Function	Automatic Authorization on Save?	Reason
Ronald	000	Customer Information Maintenance	Yes	Input and Authorize rights enabled for the user, as well as automatic authorization rights enabled for the user, branch and function.
Ronald	001	Customer Information Maintenance	No	Automatic authorization not enabled for branch 001

User	Branch	Function	Automatic Authorization on Save?	Reason
Ronald	000	FT Contract Online	No	Automatic authorization not enabled for the FT Contract Online function
Ronald	000	Customer Account Maintenance	No	Authorization access not enabled for the user
George	001	LD Contract Online	No	Automatic authorization not enabled for branch 001
George	000	Customer Account Maintenance	Yes	Input and Authorize rights enabled for the user, as well as automatic authorization rights enabled for the user, branch and function. The user can also authorize any maintenance done by the user Ronald in this function..
Smith	000	LD Contract Online	No	Authorization access not enabled for the user

For more details about automatic authorization, consult the Common Procedures user manual.

User Identification

Specify the User Id with which a User logs into Oracle FLEXCUBE. This User Id is unique across all branches.

User Reference

Specify an external reference number for the User Id.

User Password

Specify the Users Password here. This is a Hidden Field. The Password set must not be a restricted word. It should also be governed by the parameters set in the SMS Bank Parameters table, like Maximum and Minimum length, Number of Alphabetic and Numeric characters etc.

Password Changed On

The date when the password was last changed gets displayed here.

Start Date

Specify the date from which the User is valid. The Branch date gets defaulted if no other value is specified.

End Date

Specify the End Date upto which the User is valid. By default the user does not have an End Date associated, unless otherwise specified.

Force Password Change

Check this box to indicate if the '**Force Password Change**' needs to be enabled or not. This value will override if it is not checked at the SMS Bank Parameters level.

Invalid Logins - Cumulative

The number of Cumulative Invalid Login attempts allowed for a User before the User status gets Disabled is specified in the 'SMS Bank Parameters' screen. The actual attempts that a user makes when he logs into Oracle FLEXCUBE get displayed here.


Invalid Logins - Successive

The number of Successive Invalid Login attempts allowed for a User before the User status gets Disabled is specified in the 'SMS Bank Parameters' screen. The actual attempts that a user makes while he logs into Oracle FLEXCUBE get displayed here.

2.10.2 Restricted Passwords

You can maintain a list of passwords that the user is most likely to use. For example, a user may tend to use the names of persons, bank, department, etc. as a password, as these are easy to remember. This might be a security risk as it will be easy for another person to guess a password. To prevent this, you can maintain a list of passwords that the user should not use. This list of restrictive passwords will be checked before a password is accepted when the user is changing passwords. If the password entered by the user exists in the list, it will not be accepted.

To specify a list of passwords that the user is not allowed to use, click 'Restricted Passwords' button in the User Profile definition screen,

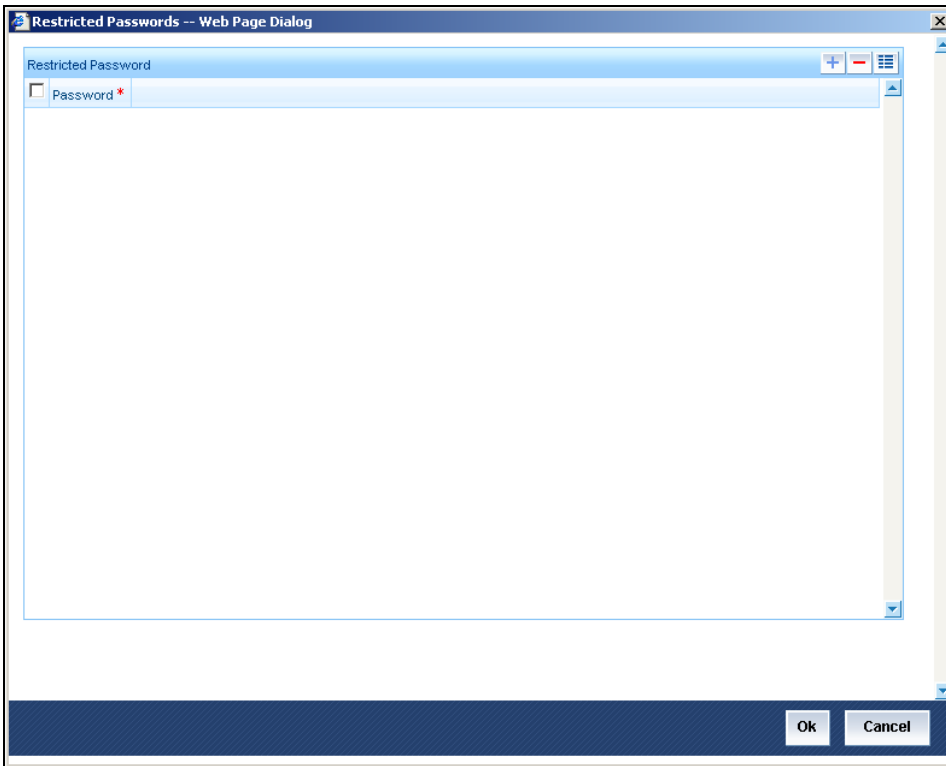


The user for whom you are defining the restrictive passwords cannot use restrictive passwords defined in the Bank Level Parameters screen and the Role Profile screen.

2.10.3 Roles

A Role is always associated to a User for a specific Branch. The values set at the Role level are directly inherited by the User for that branch, like Functions Ids, Account Class and Branch Restrictions, Input and Authorization Limits etc.

To attach the user profile you are defining to a role, you must use the 'Roles' screen. Click 'Roles' button and the 'Roles' screen will be displayed. The roles to be attached to the user profile can be listed under 'Roles' list.

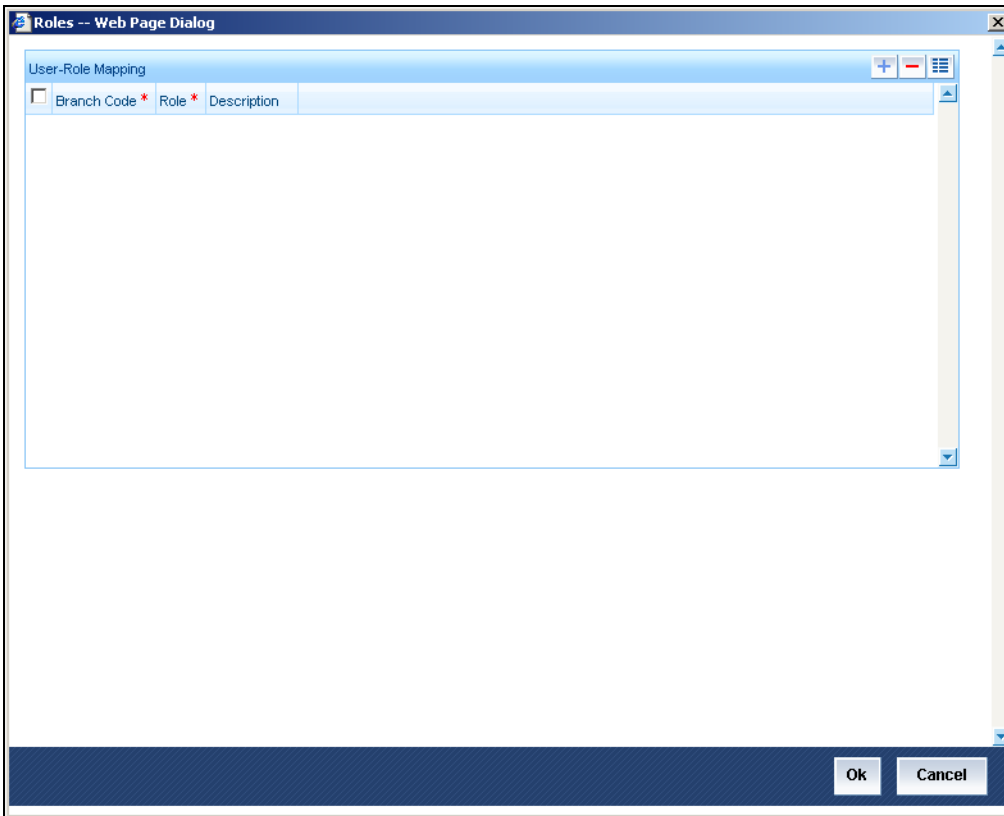


Click add icon to add a record under the 'Roles' list. Into each added record's field, select the required role by clicking the adjoining option list. Repeat this procedure to attach more roles. If the user profile belongs to a relationship manager, team manager, team assistant or business manager, you will have to add the role 'SALESROLE' to the list of allowed roles.

To delete a role(s) that has been attached to a user profile, check the box beside it and then click delete icon.

2.10.4 Rights

A user should have the necessary rights to perform various operations in respect of incoming and outgoing messages, in the Messaging module of Oracle FLEXCUBE. You can grant specific permissions for operations on messages, as well as allot the messaging queues to which the user has access. In the User Maintenance screen, click 'Rights' button to grant these rights pertaining to the Messaging module, to the user.

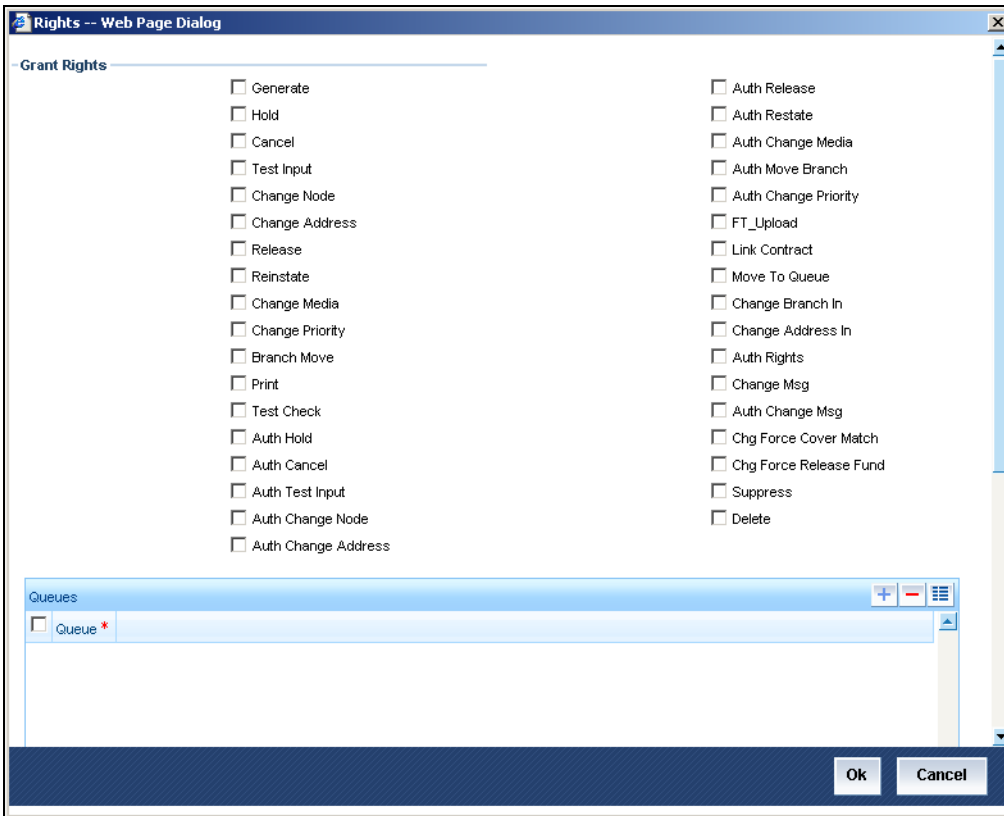

Check against the messaging operations for which you want to grant the permission.

Granting rights pertaining to operations on messages

You can grant permissions for the following operations on outgoing messages:

- Generating a message
- Printing a message
- Placing a message on hold
- Releasing a message on hold
- Canceling a message
- Inserting a test word
- Reinstating a message
- Changing the priority of a message
- Requesting status of a message
- Requesting cancellation of a message
- Changing the media through which a message is transmitted
- Changing the address to which a message is to be sent
- Moving a message to another branch
- Changing the node from which a message should be generated
- Authorization of any of the operations listed above, in respect of outgoing messages

You can grant permissions for the following operations on incoming messages:

- Printing a message

- Authorizing a testword
- Routing a message to a queue
- Associating a message with a contract
- Uploading incoming messages
- Making changes (edit) incoming messages. You can also grant permissions for changing the branch and the address in incoming messages
- Authorizing changes made to incoming
- 'Force Release' payment message transactions with 'Funding Exception' status and insufficient funds
- Suppressing a message
- Deleting a message

Granting each of these permissions in the Rights screen enables the user to perform the corresponding functions in the Incoming and Outgoing Message Browsers. The appropriate button in the Browser, in each case, is enabled for the user.

*For details regarding each of these operations in respect of both incoming and outgoing messages, consult the **Messaging System** user manual*

Apart from these functions, you can also grant permission for the cover matching function for incoming payment message transactions.

For details regarding uploading incoming payment transaction messages and cover matching for incoming payment transactions, refer the Straight Through Processing chapter in the Funds Transfer user manual.

Queues

You can allot the message queues to which the user has access, and in which the user can perform messaging operations according to the messaging rights you have assigned. The required queues can be selected and listed in the 'Queues' list under the 'Grant Queues' section.

2.10.5 Functions

In addition to attaching a user profile to a role, you can give rights to individual functions. For a user profile to which no role is attached, you can give access to specific functions. If you have:

- Attached one or more roles to a user profile
- You have given access to individual functions to a profile to which roles are attached


The rights for Function IDs that figure in both the role and user specific functions will be applied as explained in the following example.

Example

The role profile FXDP1 has access to New, Copy, Delete, Close, Reopen, Unlock and Print for the Forward Rates table.

You attach the user profile of Tanya to the role FXDP1. While allotting rights to individual functions for Tanya, you give rights to New, Copy, Delete and Close for the Forward Rates table. The role has access rights to Reopen, Unlock and Print in addition to these. In such a case, the user profile of Tanya will have rights to only the functions to which rights are given at the user profile level (that is, New, Copy, Delete and Close) even if the role FXDP1 has rights to other functions.

To give access to functions for the user profile you are defining, click 'Functions' button in the 'User Profile Definition' screen. The 'Functions' screen will be displayed as shown below.

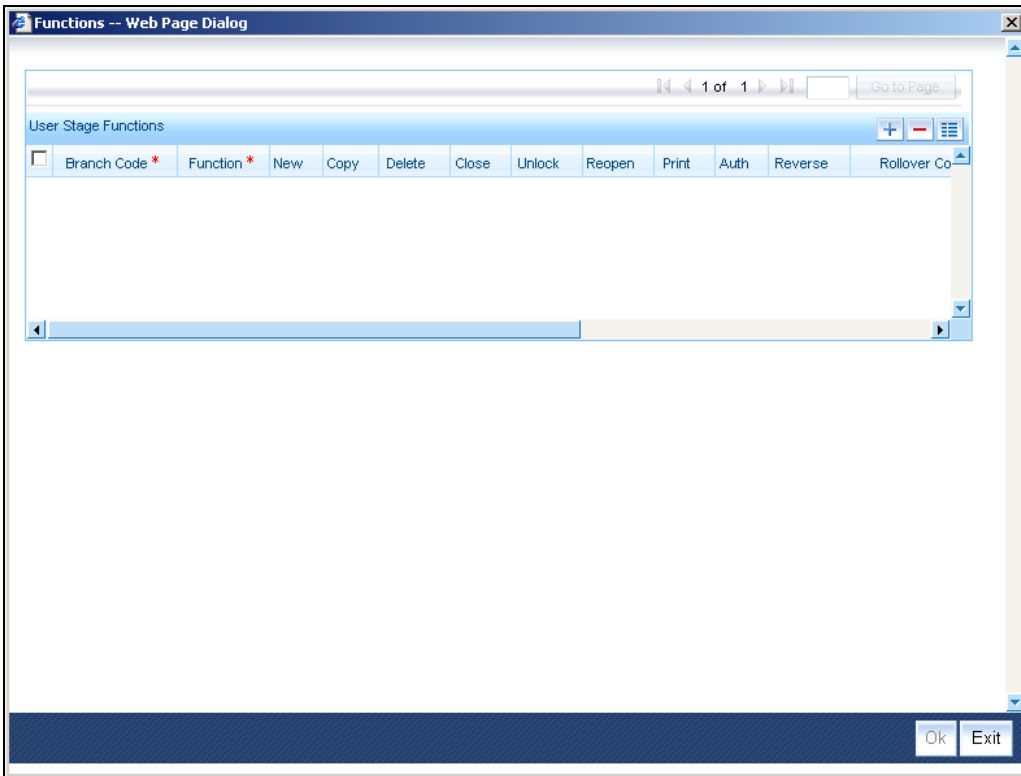

The various functions in the system fall under different categories.

To assign a function to a user profile in the User Functions screen, you must select the tab of the function category to which the function belongs. The function categories and their respective tab in the User Functions screen are as follows:


Category (Tab)	Description
Maintenance	Functions relating to the maintenance of static tables.
On-line	Functions relating to contract processing.
Batch	Functions relating to the automated operations (like automatic liquidation of contract, interest, etc.)
Reports	Functions relating to the generation of reports in the various modules.
Process	Functions relating to access rights for the tasks under a process

Click on the corresponding category tab to associate the required functions as described below:

To add a function, click add icon. At Function Identification, you should select the function for which you want to give rights. The adjoining option list displays a list of Function IDs belonging to the category along with their descriptions. From this list you can pick up the function for which you want to give access rights by double clicking on it when it is highlighted. You can then specify the rights to the different actions for the functions by checking against the action.

2.10.6 Tills

You can restrict the user from using certain tills maintained at your bank. Such restrictions can be specified in the 'Tills' screen. Click 'Tills' button to invoke the 'Tills' screen.

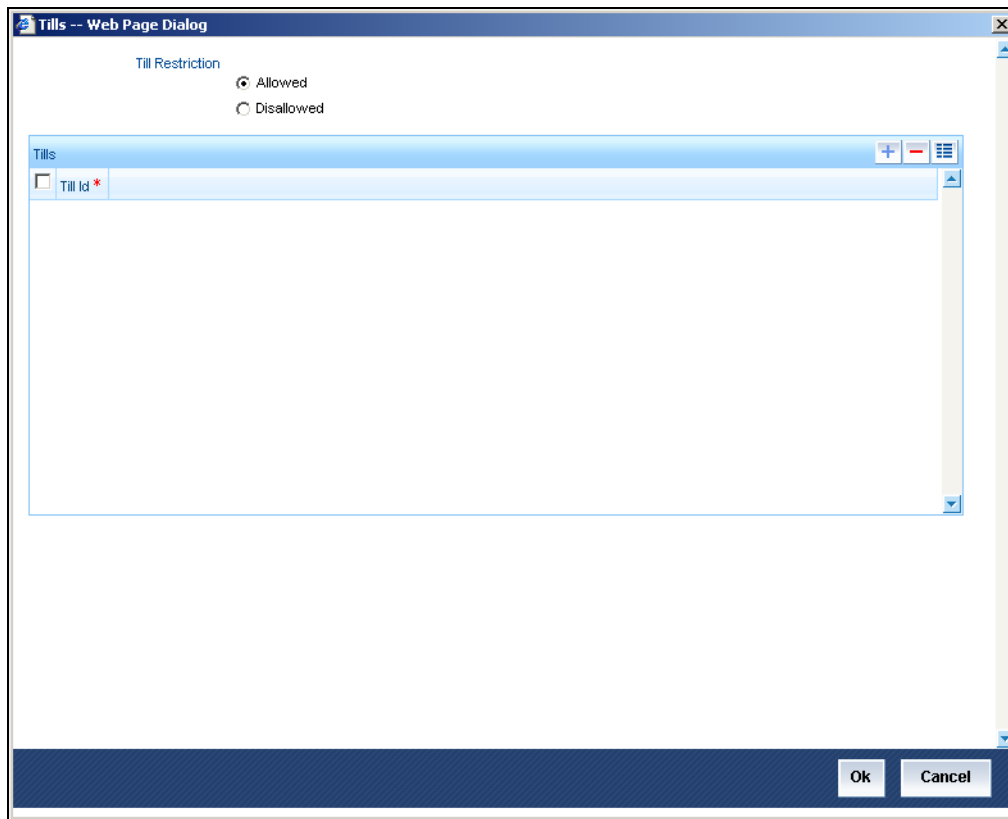


You can either allow or disallow the user from using certain tills.

- Select the option 'Allowed' if you want to allow the user to manage certain tills
- Select the option 'Disallowed' to disallow the user to manage certain tills

After choosing either the 'Allowed' or 'Disallowed' option, click add icon to add a record under the 'Tills' list. Into each added field select the required Till Id by clicking the adjoining option list.

2.10.7 Account Classes


You can restrict the user from using certain account classes that are maintained in FLEXCUBE. Click 'Account Classes' button to specify such account class restrictions.

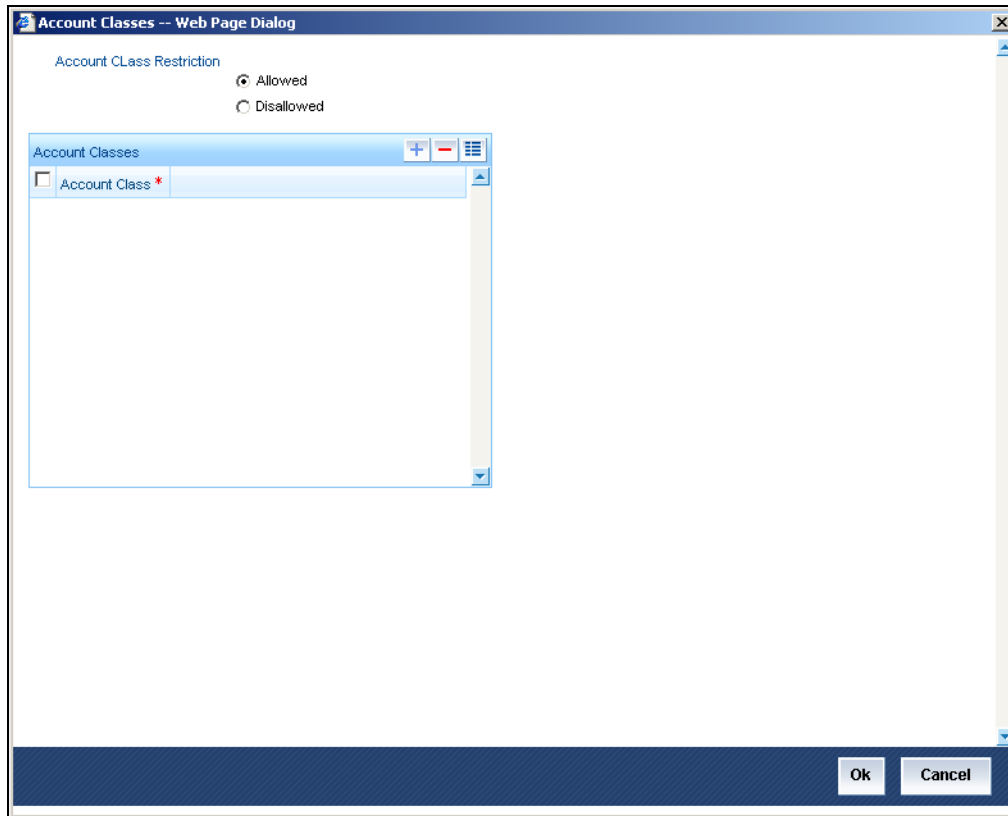

You can either allow or disallow the user from using certain account classes. Subsequently, specify the account classes, which have to be restricted for the user.

2.10.8 General Ledgers

You can restrict the user from posting entries to certain General Ledgers (GLs) maintained in Oracle FLEXCUBE. Further, you can restrict the user from posting entries to specific node and leaf GLs. Click 'General Ledgers' button to specify the GL restrictions.

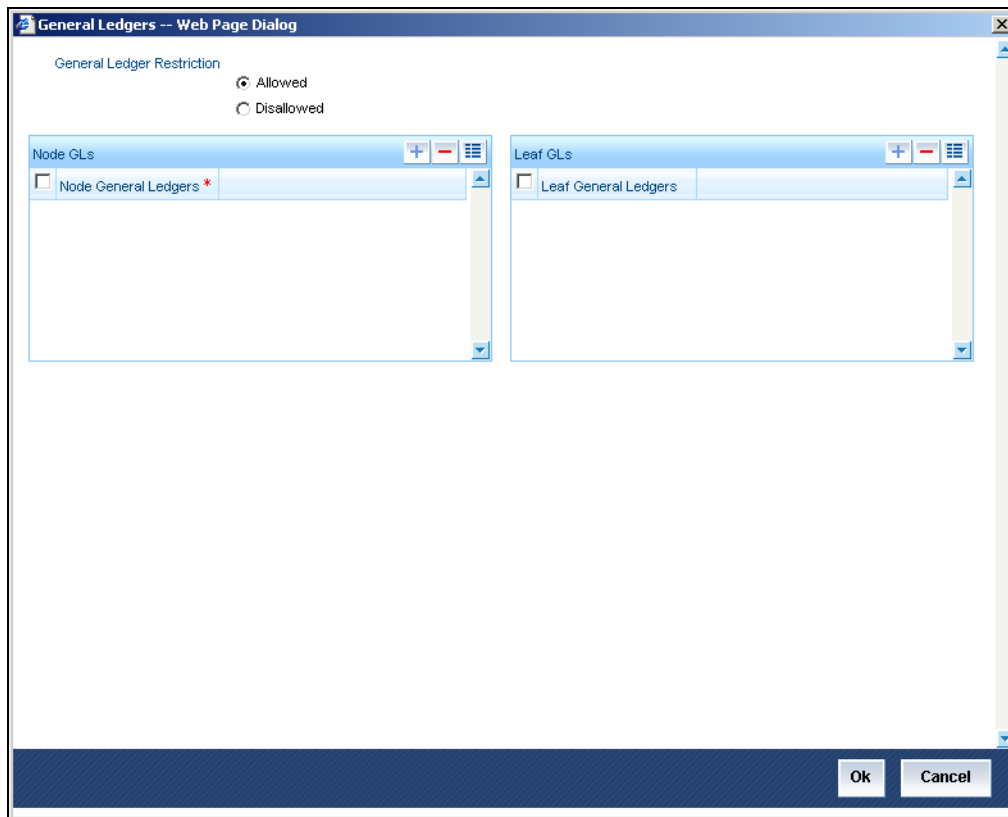

You can either allow or disallow the user from using certain GLs. Select the node GLs and leaf GLs that you want to restrict.

2.10.9 Limits

You can place a limit on the transaction amount for a user. Consequently, the system will not allow the user to process transactions exceeding a specific limit. You can also associate a limits role with a user profile. Click 'Limits' button to indicate the limits.

The screenshot shows a web application window titled "Limits -- Webpage Dialog". It contains a "Limits" section with four radio buttons: "User Limits", "Limits Role", "Function Limits", and "No Limits". To the right of these buttons are three input fields: "Limit Currency", "Maximum Transaction Amount", and "Authorization Limit". Below this is a tabbed interface with "Role Of Limits" and "Function Limits" tabs. A table is visible with columns: "Branch *", "Limits Role", "Limit Currency", "Input Limit", and "Authorization Limit". The table is currently empty. Navigation controls like "Go to Page" and "1 of 1" are also present.

2.10.9.1 Specifying Limits

In this screen, you can choose to:

- Define user-specific limits
- Link a Limits Role to the User Profile
- Define function-specific limits
- Maintain No Limits

The manner in which FLEXCUBE handles each of the above options is explained below:

2.10.9.2 Specifying User Specific

If you choose to maintain User Limits, you will need to specify the following details:

- Limit Currency
- Input Limit
- Authorization Limit

When a user processes a transaction, the system will convert the transaction amount (if the transaction is in a different currency) to the currency in which the limit amount is expressed. If the amount exceeds the limits maintained for the specific user, the system will display an override message.

When such an override is sought, the user will be allowed to continue processing depending upon the sensitivity assigned to the override. The implementers at your installation configure this sensitivity, depending upon your requirements. If it has been configured as 'ignore' or 'warning', the user can continue processing (despite exceeding the input limit) by selecting 'OK' in the override message window, or select 'Cancel' to terminate the processing. If configured to be an 'error', the user cannot proceed with the transaction without authorization.



The User Limits maintained for a User Profile are common and applicable across all the branches of your bank.

2.10.9.3 Specifying Role of Limits

You can link a Limits Role to the User Profile. The Limits maintained for the role will be applicable to the user profile to which it is linked.

If you select the Limits Role option, you will be required to specify the following details:

Branch

For a user, you can assign Limit Roles specific to each branch of your bank. Depending on the branch in which the user operates, the relevant Limits Role will be made applicable. You can select the branch from the option-list available.



You can attach only one Limits Role to a branch. Further, if you choose not to attach a Limits Role to a particular branch, the system will not validate the limits in that branch.

Limits Role

All the Limits Roles maintained at your bank will be displayed in the option-list. You can select the Roles you wish to link to the user profile. On selection of the Role, the following details get defaulted:

- Limits Currency
- Input Limit
- Authorization Limit



For Journal (Single and Multi-Offset) and Teller transactions, the check will be performed on each individual transaction i.e. each debit and credit entry.

No Limits

Select the **No Limits** option, to place no restrictions on the user. The user will be allowed to specify any amount during transaction processing. Likewise, users with authorization rights will be allowed to authorize transactions without any restrictions on the amount involved in the transaction.

2.10.9.4 Specifying Function Limits

You can link a function-specific role to the user profile. The limits maintained for the function will be applicable to the user profile to which it is linked.

If you select the 'Function Limits' option, you will be required to specify details in the 'Function Limits' tab.

The screenshot shows a web application window titled "Limits -- Webpage Dialog". On the left, under the "Limits" heading, there are four radio button options: "User Limits", "Limits Role", "Function Limits", and "No Limits". To the right of these are three input fields: "Limit Currency", "Maximum Transaction Amount", and "Authorization Limit". Below the radio buttons are two tabs: "Role Of Limits" and "Function Limits", with "Function Limits" being the active tab. The "Function Limits" tab contains a table with the following columns: "Branch Code", "Function Id", "Currency", "Lower Auth Limit", and "Upper Auth Limit". The table is currently empty. Above the table, there are navigation controls including "Go to Page" and "1 of 1".

Specify the following details.

Branch Code

Specify the branch for which you want to maintain authorisation limit. The adjoining option list displays all valid branch codes maintained in the system. You can also select the appropriate one from it.

Function

Specify the function for which you want to maintain authorisation limit. The adjoining option list displays all valid function IDs available in the system. You can also select the appropriate one from it.

Currency

Specify the currency in which you want to maintain authorisation limit. The adjoining option list displays all valid currency codes maintained in the system. You can also select the appropriate one from it.

Lower Auth Limit

Specify the minimum limit for transactions that can be authorised by the user profile.


Upper Auth Limit

Specify the maximum upper limit for transactions that can be authorised by the user profile.

If you don't maintain specific limits for the user profile, the limits maintained for the mapped user role will become effective. However, if you maintain limits for the user profile, they will take precedence over role-level limits.

2.10.10 Branches

To specify the branches from which the Staff and Branch users of the bank can operate, you must use the 'Branches' screen. Click 'Branches' button in the User Maintenance screen and 'Branches' screen will be displayed as shown below.

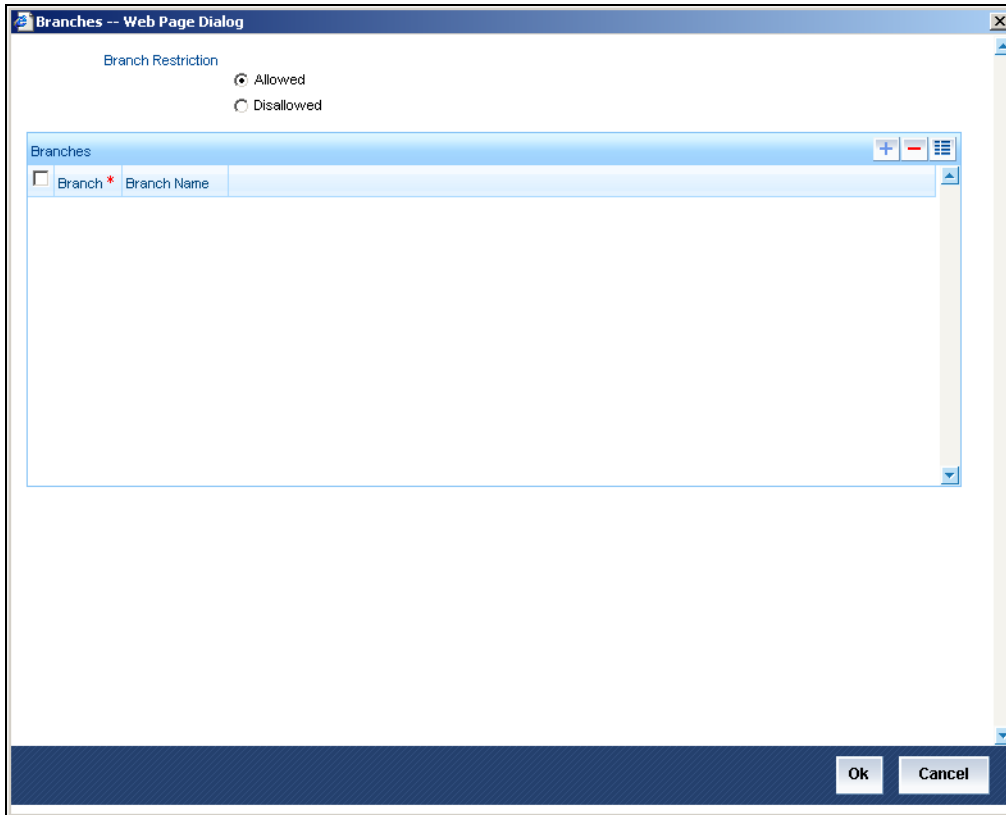

You can maintain a list of branches to which the user is either:

- Allowed
- Disallowed

To maintain an allowed list of branches choose the **Allowed** option. Then the 'Branch Restrictions' list will show the list of allowed branches. To maintain a disallowed list of branches, choose the **Disallowed** option.

If you maintain an 'allowed' list, then the user profile will be available only for those branches that you specify in the Branch Restrictions list. Similarly, if you maintain a 'disallowed' list, then the user profile will not be available only for those branches that you specify in the Branch Restrictions list. Any branch that is 'Disallowed' will not appear to that user in his 'Change Branch' list.

After choosing either the 'Allowed' or 'Disallowed' option, click add icon to add a record under the 'Branch Restrictions' list. Into each added record's field, select the required branch by clicking the adjoining option list.



Note the following:

- The branch in which the user profile is defined is known as the Home Branch. The branches the user can access are known as the Host Branches
- You should create an ID called GUEST in each branch. When a user belonging to the Staff category changes the branch of operation, he can perform the functions defined for the GUEST ID in the Host Branch.

2.10.11 Products

You can restrict the user from using certain products maintained in FLEXCUBE. Such product restrictions for the user can be specified in the 'Products' screen. Click 'Products' button and the 'Products' screen will be displayed.

The screenshot shows a web-based dialog box titled "Products -- Web Page Dialog". It features two main sections for configuring restrictions. The first section, "Posting Restriction", has radio buttons for "Allowed" (which is selected) and "Disallowed". Below this is a table with two columns: "Product Code *" and "Description". The second section, "Access Restriction", also has radio buttons for "Allowed" (selected) and "Disallowed", followed by an identical empty table. At the bottom right of the dialog, there are "Ok" and "Cancel" buttons.

In this screen you can place the following restrictions on the User Profile:

- Posting Restriction
- Access Restriction

Users who have posting restrictions will not be able to process transactions involving restricted products. Users with access restrictions will not be allowed to view or print financial details of contracts involving restricted products.

To allow or disallow the user from posting into/accessing certain products by

- Select the option 'Allowed' if you want to allow the user to post entries into/access certain products
- Select the option 'Disallowed' to disallow the user from posting/accessing certain products

After choosing the 'Allowed' or 'Disallowed' option, click add icon to add a record under the 'Products' list. Into each added record's field select the required Product Code by clicking the adjoining option list.




Note the following:

- If for a product the Access restriction has not been maintained but Posting is allowed the restricted user can post transactions for that product and can view the contract information until such time that the contract gets authorized.
- For the PC module, you can apply restrictions on product categories.

2.10.12 Process


You can give a user rights to the workflow stages of certain functions using the 'Process' screen. Click 'Process' button in the 'User Maintenance' screen and invoke the 'Process' screen.

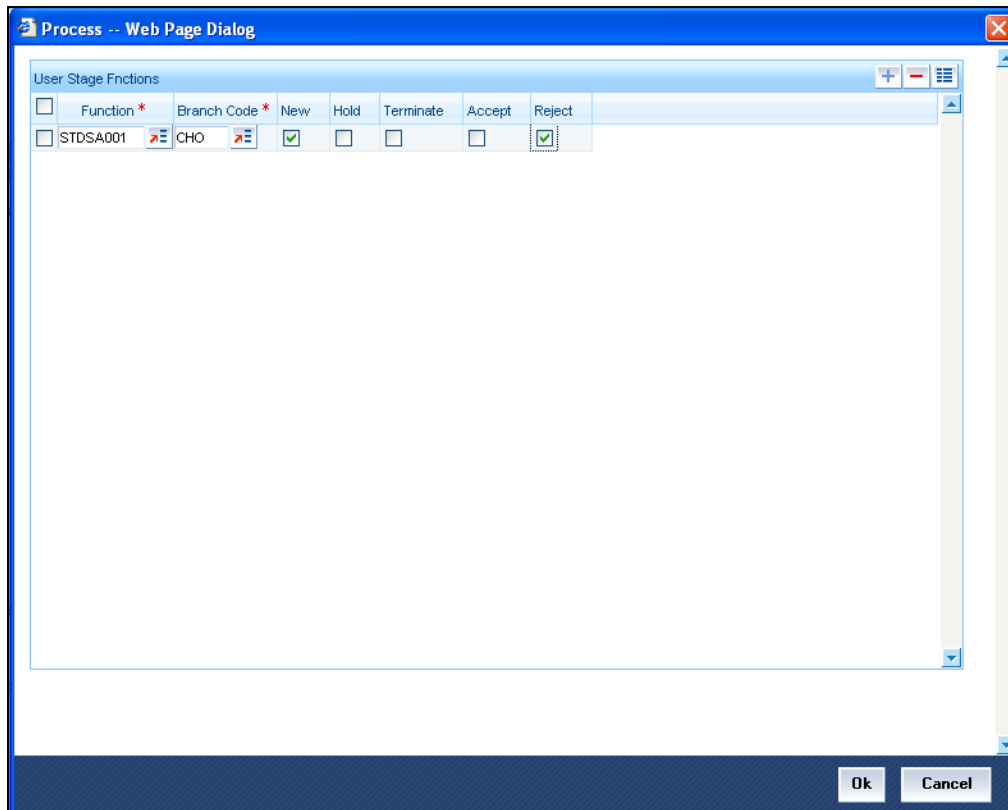

Click add icon to add a record under the 'User Stage Functions' list. Into each added field, select the required function, branch code by clicking the adjoining option list. For a selected function, you can give rights to perform different stages of workflow to User.

2.10.13 Disallowed Functions

You can restrict certain functions from being performed by a user. You can specify such restrictions in the 'Disallowed Functions' screen. Click 'Disallowed Functions' button to invoke this screen.

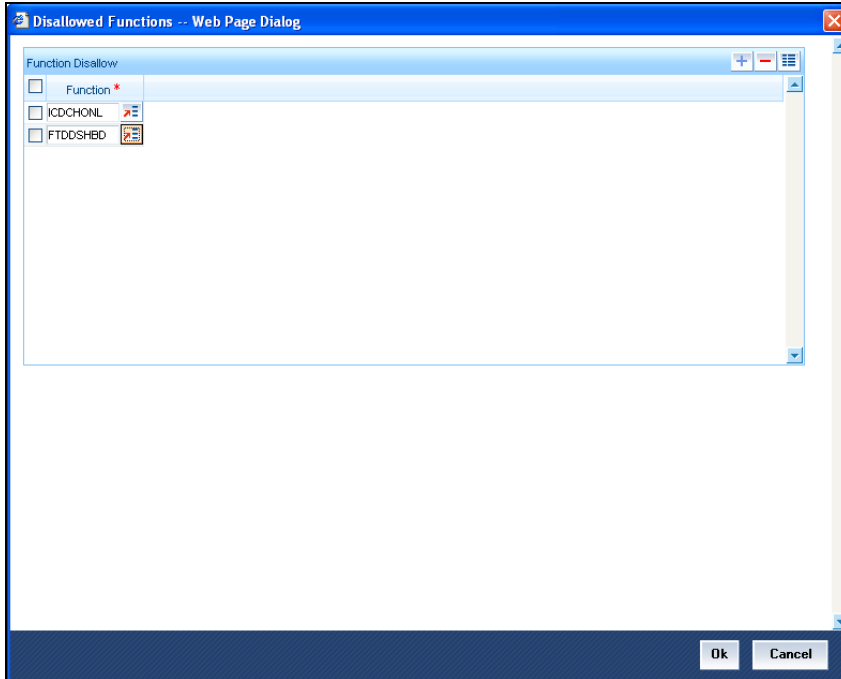

Click add icon to add a record under the 'Function' list. Into each added field, select the required function by clicking the adjoining option list.

2.10.14 Users Holiday

You can view holiday periods maintained for the user profile in the 'Users Holiday' screen. Click 'Users Holiday' button to invoke this screen.

Authorization Status	Record Status	Branch Code	User ID	Leave From	Leave To	Maker ID	Maker Dt Stamp	Checker ID	Checker D
Authorized	Open	CHO	MAHADEV	8/1/2008	8/8/2008	MAHADEV	9/1/2008	KV1	9/1/2008
Authorized	Open	CHO	MAHADEV	9/1/2008	9/1/2008	MAHADEV	9/1/2008	KV1	9/1/2008

The following details are displayed:

- Authorization Status
- Record Status
- Branch Code
- User ID
- Leave From
- Leave To
- Maker ID
- Maker Date Stamp
- Checker ID
- Checker Date Stamp



The above screen can be used only for viewing the holiday summary of the user specified in the 'User Holiday Maintenance' screen. Hence all the query fields such as Authorization Status, Branch Code, User ID etc will be disabled.

For more information about viewing holiday details for any user profile, refer the section 'Viewing Holiday Summary Details' in this document.

2.10.15 Copying the User Profile of an Existing User

Often, you may have to create a user profile that closely resembles an existing one. In such a case, you can copy the existing profile on to the new one.

Select 'Copy' from the Actions menu in the Application toolbar. A list of existing user profiles will be displayed. Click on the one you want to copy. All the details of the profile except the User ID and the password will be copied and displayed for the new user. Enter a unique User ID and give a password. You can change any of the details of the profile before saving it.

2.10.16 Deleting a User Profile

Enter the User ID. The details defined will be displayed. Select 'Delete' from the Actions menu in the Application toolbar to delete an existing user profile. Only users that have not been authorized can be deleted by the creator. You will be prompted to confirm the deletion. The user profile will be deleted only if you confirm the deletion.


2.10.17 Closing a User Profile

Users Ids that are no longer usable can be closed. For Closing, Enter the User ID. The details defined will be displayed. Select 'Close' from the Actions menu in the Application toolbar to close an existing user profile. The profile can be closed only if the User is currently not logged on to the system.

You will be prompted to confirm the Closure. The user profile will be closure only if you confirm the Closure.

2.11 Defining Alerts for Users

Oracle FLEXCUBE allows you to define and send text messages to a destination user. These text messages will be displayed as an alert on the dashboard when the destination user logs in to the application. The user can then pick up the unprocessed messages and process it. You can define the message for a destination user in the 'User Alerts' screen. You can invoke this screen by typing 'SMDUSALR' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

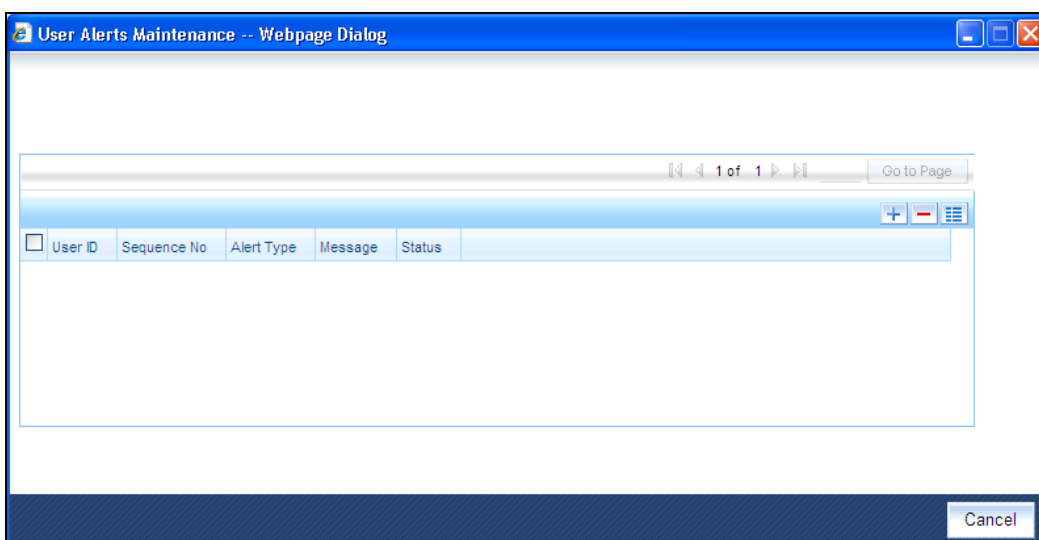

The following details are captured here:

User Id

Specify the id of the destination user to whom the message has to be sent.

Sequence No

Specify the sequence number of the message that you are defining.

Alert Type

Specify the alert type as I (Information).

Message

Specify the message that has to be sent to the destination user.

Status

Specify the status of the message as any of the following:


- P -Processed
- U -Unprocessed

After defining the message click 'Exit' button to exit from the screen.

For more details on how the destination user can view the alert messages refer section titled 'Unprocessed Alerts' in the chapter 'Getting Started with Oracle FLEXCUBE' in 'Procedures' User Manual.

2.12 Maintaining Sales Hierarchy

You can maintain a hierarchy of users in your sales team based on the roles they play in your bank. You can define such a hierarchy using the 'Sales Role Hierarchy Maintenance' screen. You can invoke this screen by typing 'SMDLSRL' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button. Note that this screen is available only in the Head office branch.

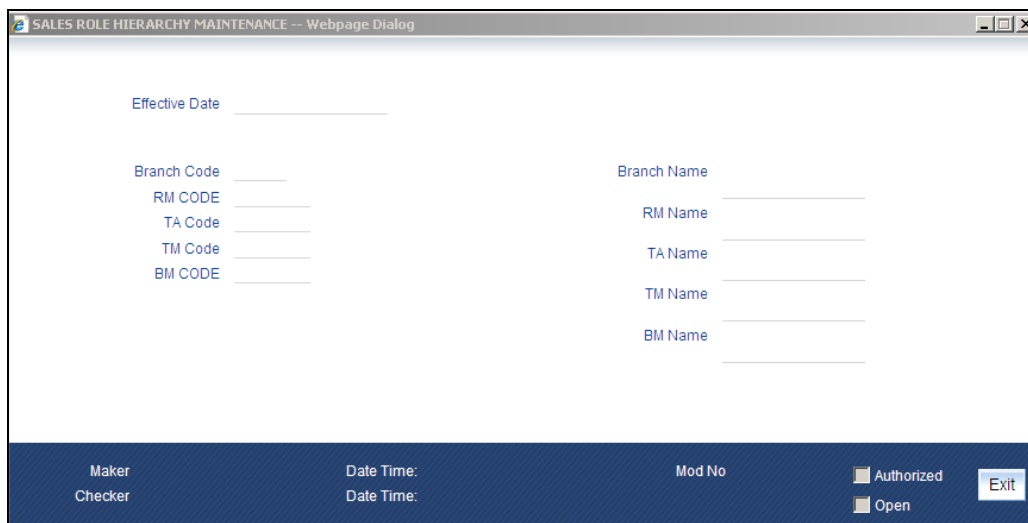

The screenshot shows a web browser window titled "SALES ROLE HIERARCHY MAINTENANCE -- Webpage Dialog". The main content area contains the following fields:

- Effective Date _____
- Branch Code _____
- RM CODE _____
- TA Code _____
- TM Code _____
- BM CODE _____
- Branch Name _____
- RM Name _____
- TA Name _____
- TM Name _____
- BM Name _____

The footer bar is dark blue and contains the following elements from left to right:

- Maker
- Checker
- Date Time: _____
- Date Time: _____
- Mod No _____
- Authorized
- Open
- Exit button

Specify the following details.

Effective Date

The system displays the current date here. However you can change it to any date in future.

At any given point in time, the system will always refer the sales hierarchy as of the latest effective date.

Branch Code

Specify the branch for which you are maintaining the sales user hierarchy. The adjoining option list displays all valid branch codes maintained in the system. You can also select the appropriate one from it.

Branch Name

The system displays the corresponding branch name.

RM Code

Specify the user profile which you want to maintain as the relationship manager in the sales hierarchy of the branch. The adjoining option list displays all valid user profiles linked to the MIS class 'RM_LOAN' and 'RM_DEP' in the system. You can also select the appropriate one from it.

Only one future-dated maintenance can be done for every relationship manager in your branch.

RM Name

The system displays the corresponding user name.

TA Code

Specify the user profile which you want to maintain as the team assistant in the sales hierarchy of the branch. The adjoining option list displays all valid user profiles whose home branch code is the same as the branch code maintained in this screen. You can also select the appropriate one from it.

TA Name

The system displays the corresponding user name.

TM Code

Specify the user profile which you want to maintain as the team manager in the sales hierarchy of the branch. The adjoining option list displays all valid user profiles whose home branch code is the same as the branch code maintained in this screen. You can also select the appropriate one from it.

TM Name

The system displays the corresponding user name.

BM Code

Specify the user profile which you want to maintain as the business manager in the sales hierarchy of the branch. The adjoining option list displays all valid user profiles whose home branch code is the same as the branch code maintained in this screen. You can also select the appropriate one from it.

BM Name

The system displays the corresponding user name.

Click Save icon to save the record. This record needs to be authorized for it to become effective.

Before authorization, you can unlock the record and make changes. The following fields will only be available for modification:

- TA Code
- TM Code
- BM Code

Whenever a relationship manager initiates a CIF-based query, he/she will be allowed to view all accounts of only those customers that are linked to him/her. Similarly, all team managers and business managers under that relationship manager will have access to all accounts linked to the relationship manager they are under. However, a relationship manager will not be able to query upon customer data of customers who are not linked to him/her.

2.13 Viewing Sales Hierarchy Summary

You can view summary of all sales hierarchy in your sales team using the 'Sales Role Hierarchy Maintenance Summary' screen. You can invoke this screen by typing 'SMSSLSRL' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button. Note that this screen is available only in the Head office branch.

SALES ROLE HIERARCHY MAINTENANCE SUMMARY -- Webpage Dialog

Authorisation Status [] Record Status []
Branch Code [] RM CODE []
Effective Date []

Search Advanced Search Refresh Reset

Records per page 15 3 Lock 1 of 1 Go to Page

Authorisation Status	Record Status	Branch Code	RM CODE	RM Name	TA Code	TA Name	TM Code	TM Name	BM CODE	BM
----------------------	---------------	-------------	---------	---------	---------	---------	---------	---------	---------	----

Exit

You can query on any one or all of the following details:

- Authorisation status
- Record Status
- Branch Code
- RM Code
- Effective Date

Click 'Search' button. The system identifies all records satisfying the specified criteria and displays the following details for each one of them:


- Authorisation status
- Record Status
- Branch Code
- Branch Name
- RM Code

- RM Name
- TA Code
- TA Name
- TM Code
- TM name
- BM Code
- BM Name

Double-click on any record to view the detailed screen.

2.14 Single Sign On (SSO) Enabled Environment

Provided you have opted for the SSO Enabled option at bank level, you can log in from an LDAP (Oracle Internet Directory) external system into Oracle FLEXCUBE through the screen shown below.

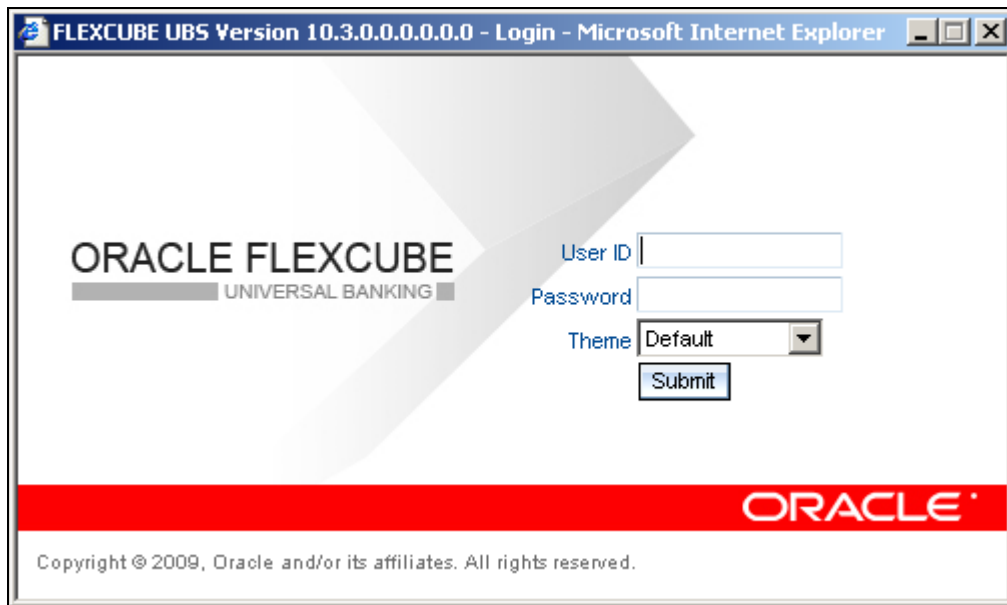

After successful authentication and authorization of the user is carried out by the LDAP (Oracle Internet Directory), a request is forwarded to gain access into Oracle FLEXCUBE. On clicking the 'Submit' button you can directly get into Oracle FLEXCUBE without specifying Oracle FLEXCUBE user id and password.


3. Associated Functions

3.1 Clearing a User ID

When a User logs into the system, the system maintains a record of the user with the date and time of login. On a successful, normal log out this record gets deleted.

Occasionally, you may come across a situation when a user who is logged into the system is forced out. However, the ID of the user still continues to have a status of Currently Logged In. In such a situation, the user will not be allowed to log in to the system again.

Such User IDs can be cleared through the 'Clear User Profile' screen. The Ids of the users currently logged into the system for that branch will be displayed. You can invoke this screen by typing 'CLRUI' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

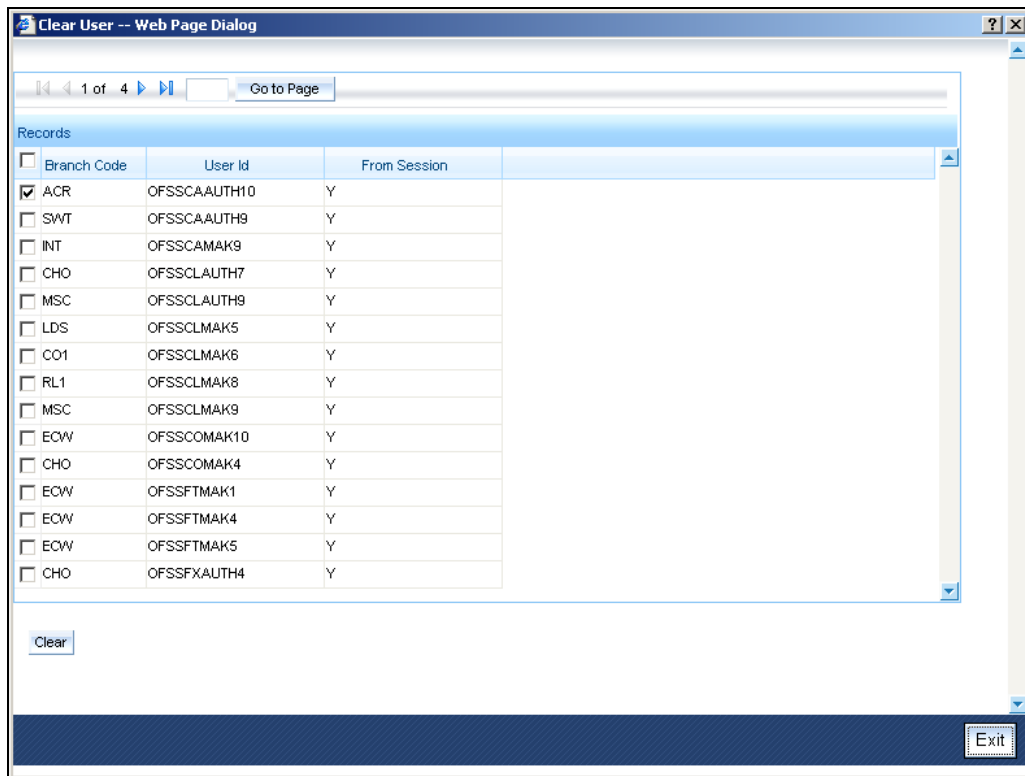


Select the check boxes next to the User IDs which you want to clear and then click 'Clear' button.

3.2 Changing the System Time Level

The time level is allotted at two levels — at the system (branch) level and at the user level. For a user to be able to login, the time level for the user profile should be greater than or equal to that of the system. The time level can be between zero and nine.


You can change time level of the branch by using the 'Change Time Level' screen. You can invoke this screen by typing 'SMDCHGTL' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button. Click 'Users' button for a display of the details of users who are currently logged in.

This screen shows a list of all users who are currently logged in and their respective Time Levels. When the Time Level of the branch is changed the system validates and displays a message if the Time Level of any of the Users is lesser than that of the newly changed value. These users can continue to log onto and work on the system till they log off. When they try to log in back the system validates and only allows such users access whose time levels are greater than that of the system

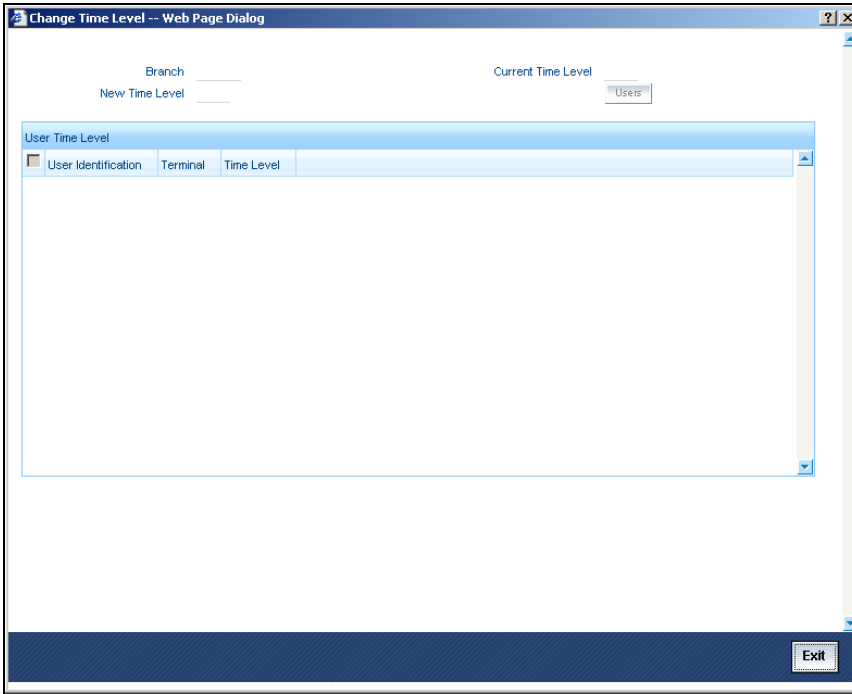

3.3 View Current Users

The user of a branch can view a list of all the users logged in from the current branch or from any other the branches through the 'Current Users' screen.

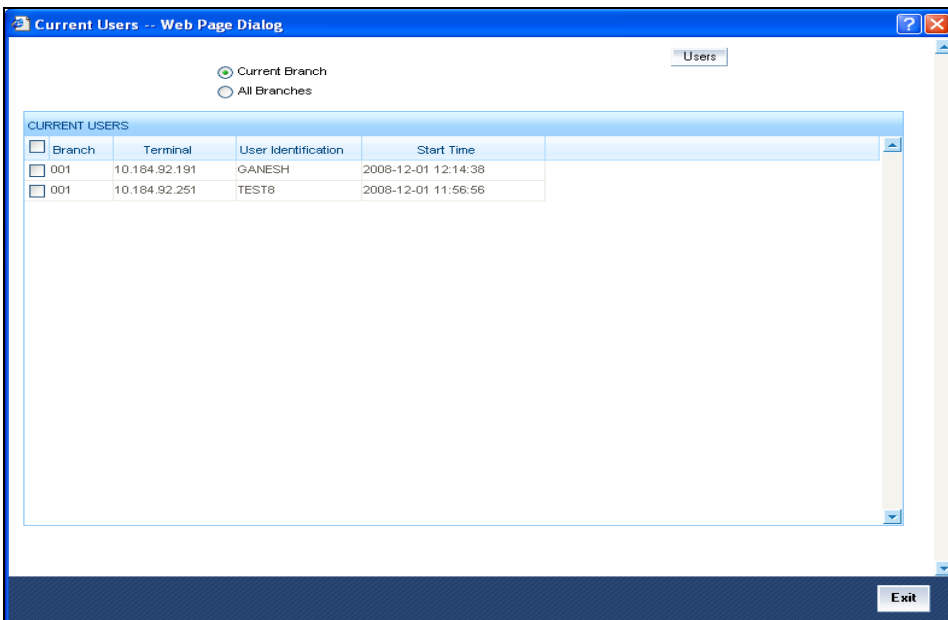

The following details are captured here:

Branch

You are allowed to view users logged in from the current branch as well as any other branch. Select the any of the following options and click 'Users' button to view the current users of that branch:

- Current Branch
- All Branches


The following user details are displayed here:

- Branch – The branch from which the user has logged in
- Terminal – The terminal/system from which the user has logged in
- User Identification – The name of the user
- Start Time – The time when the user logged in

3.4 Defining Language Codes

Every language that is supported by the system is identified by a Language Code. In Oracle FLEXCUBE, this code is a three character alphanumeric code.

Invoke the 'Language Code Maintenance – Detailed' screen by typing 'SMDLNGCD' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

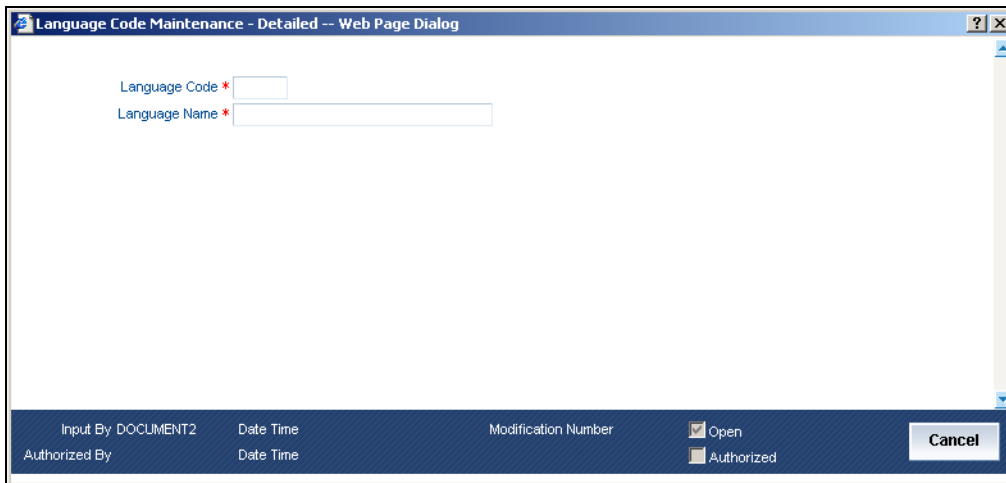

Language Code Maintenance - Detailed -- Web Page Dialog

Language Code *

Language Name *


Input By DOCUMENT2 Date Time Modification Number Open
Authorized By Date Time Authorized

Example

For English, the code you could enter in Oracle FLEXCUBE could be ENG.

3.5 Changing the Branch of Operation

Through this function, you can change the branch of operation to a branch other than the one you are signed on to. The branches to which you can change into will be defined in your user profile. You can change your branch of operation only when a function that has been initiated by you in the current branch has been completed

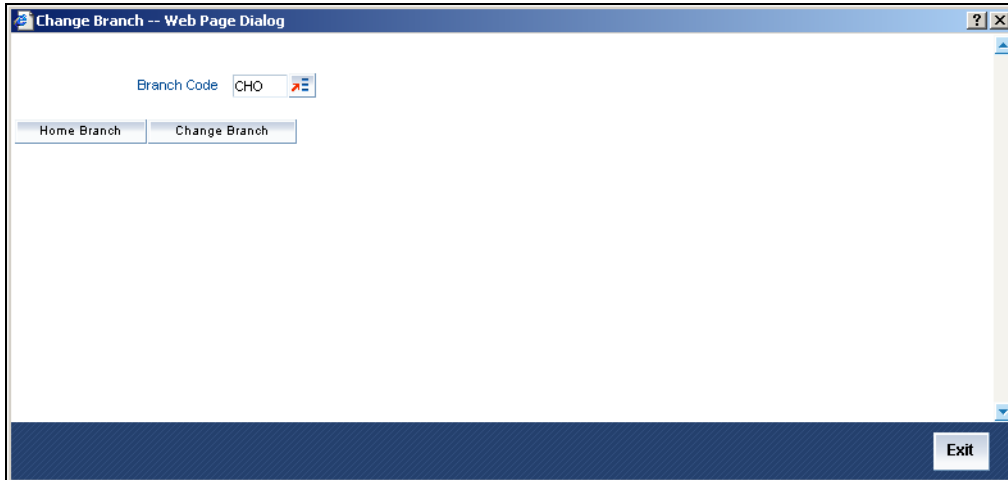

3.6 Changing the User Password

The Password of a User can be changed either when it expires or at the will of the user using the 'Change Password' screen.



The following details are captured here:

Enter Old password

Specify the old password which has to be changed.

Enter new password

Specify the new password.

Confirm new password

Specify the new password.

Click 'Save' to save the new password. Click 'Cancel' to exit the screen.

3.7 Maintaining SSO Parameters

LDAP is an external directory system which stores the details regarding user ids and password.

Once SSO has been enabled for your bank, the SSO parameters need to be maintained. This can be done using the 'Single Sign On Maintenance' screen. You can invoke this screen by typing 'SMDSOPRM' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Input By	Date Time	Modification Number	Open	Authorized By	Date Time	Authorized
DOCUMENT2			<input checked="" type="checkbox"/>			<input type="checkbox"/>

The following details can be maintained in this screen:

LDAP Host

Indicate the machine or server name where LDAP (Oracle Internet Directory) is installed.

LDAP Port

Specify the network Port number where the LDAP (Oracle Internet Directory) listen to the Server.

LDAP Admin id

Specify the admin user id of the LDAP (Oracle Internet Directory).

LDAP Password

Specify the Password for the LDAP Admin User which is provided during installation.

LDAP Base

Specify the directory information tree (DIT) structure under which the data is to be stored, which is provided during installation. This is used while validating the user present in the LDAP (Oracle Internet Directory).


Time Out Duration (Sec)

You can stipulate the allowable idle time (in seconds) that a user can spend without performing any activity, after logging in to the system.

3.8 Maintaining Transaction Status Control

The 'Transaction Status Control Maintenance' screen allows the user to define the various action buttons depending on the status of the contract. For each Transaction Status, the record status 'Authorized' or 'Unauthorized', could also affect the Action buttons. Some of the statuses that a Contract could have are:

- Y-Irrevocable
- A-Authorized
- U-Unauthorized
- V-Reversed
- L-Liquidated
- S-Closed
- H-Hold
- K-Cancelled
- N-NON-CUMULATIVE
- T-TIME
- O-OUR

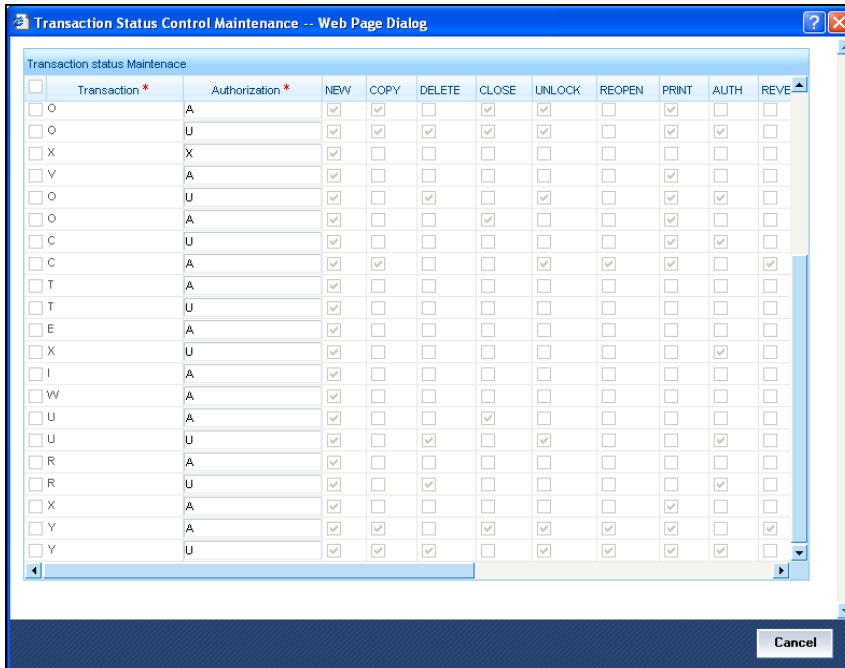

Check the box against a transaction record to select the actions allowed for that transaction. Following are the actions that are allowed on a record:

- New
- Copy
- Delete
- Close
- Unlock
- Reopen
- Print
- Auth
- Reverse

3.9 Maintaining Error Messages

Error codes provide step by step support for maintenances and contract Input for a User. The Error codes are uploaded into the system at Software installation. However the 'Description' and 'Type' of the error can be modified from the Oracle FLEXCUBE Menu. Each Error Code can be of the following types:

- Override(O)
- Ignore / Warning (I)
- Error(E)

You can maintain error messages using the 'Error Messages Maintenance' screen.

Error Code * CS-EXR002
 Language * ENG
 Description English
 Type * O
 Message Amount exceeds the max limit and rate reference number is null.

Input By SYSTEM Date Time 8/12/2005 Modification Number 1 Open
 Authorized By SYSTEM Date Time 8/12/2005 Authorized Ok Exit

The following details are captured here:

Error Code

Specify a code for the error message here.

Language

Specify the language code of the error message.

Description


Specify the description for the language code.

Message

Specify the error message that has to be displayed.

3.9.1 Configuring Customized Hot Keys for Launching Screens

Oracle FLEXCUBE allows you to configure Hot keys or Shortcut keys for function ids, using which you can launch the function id screens without typing the function ids. For this you need to map each function id to a hot key using the 'Hot Key Maintenance' screen. To invoke the 'Hot Keys Maintenance' screen click the option 'Hot Keys' under 'Options' menu. You invoke this screen by typing 'SMDHOTKY' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

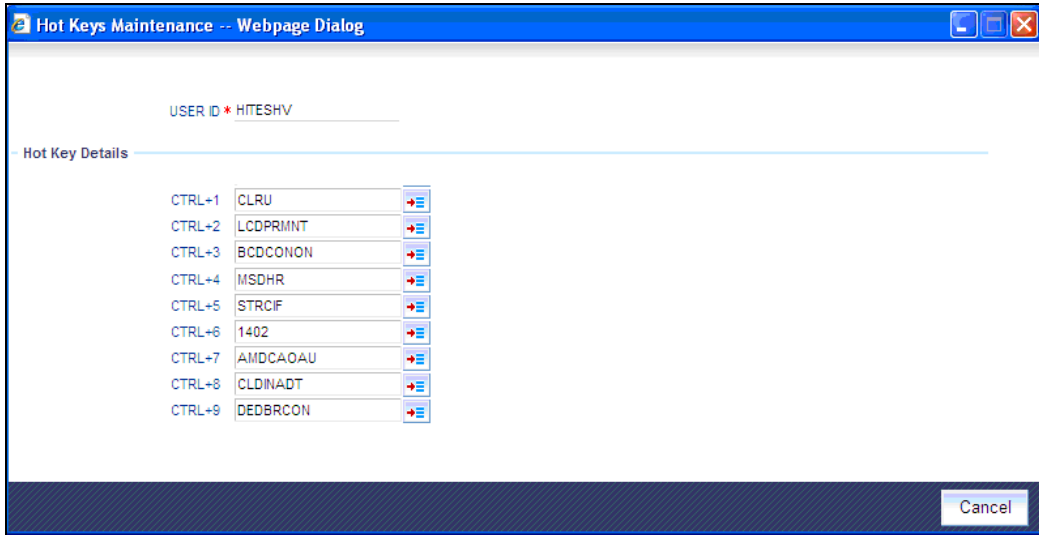

The following details are captured in this screen:

User Id


The id of the user who has logged in is displayed here.

Hot Key Details

Here, you can map a function id against each hot key. You can select the function id to be mapped against the hot key from the adjoining option list.

3.10 Viewing User Activities

You can view a log of activities of Oracle FLEXCUBE users through the 'User Activity' screen. Note that you can view user activities only through Oracle FLEXCUBE host system. This screen is not available for viewing in the branch installations. You can invoke this screen by typing 'SMSUSRAC' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button. The screen is displayed as below:

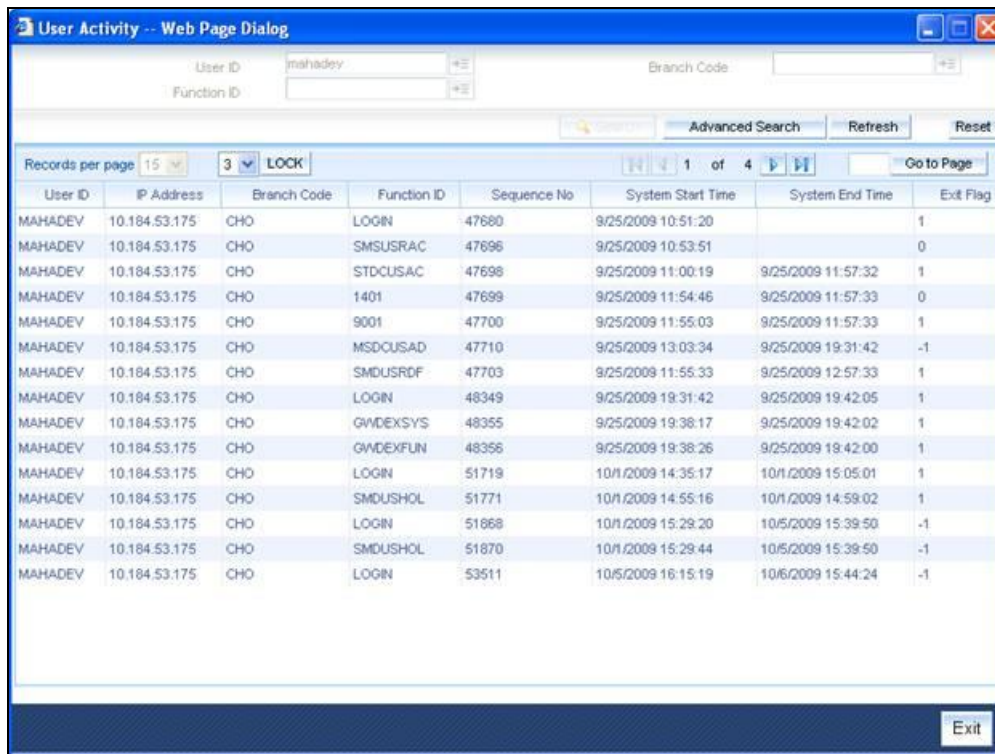

The screenshot shows a web application window titled "User Activity -- Web Page Dialog". It features search filters for User ID (mahadev), Branch Code, and Function ID. Below the filters are buttons for "Advanced Search", "Refresh", and "Reset". The main area displays a table of records with columns: User ID, IP Address, Branch Code, Function ID, Sequence No, System Start Time, System End Time, and Exit Flag. The table contains 15 records, all for user MAHADEV. A "Records per page" dropdown is set to 15, and a "LOCK" button is visible. The table shows various activities like LOGIN, SMDUSRAC, STDCUSAC, SMDUSRDF, and SMDUSHOL with their respective sequence numbers and timestamps.

User ID	IP Address	Branch Code	Function ID	Sequence No	System Start Time	System End Time	Exit Flag
MAHADEV	10.184.53.175	CHO	LOGIN	47680	9/25/2009 10:51:20		1
MAHADEV	10.184.53.175	CHO	SMSUSRAC	47696	9/25/2009 10:53:51		0
MAHADEV	10.184.53.175	CHO	STDCUSAC	47698	9/25/2009 11:00:19	9/25/2009 11:57:32	1
MAHADEV	10.184.53.175	CHO	1401	47699	9/25/2009 11:54:46	9/25/2009 11:57:33	0
MAHADEV	10.184.53.175	CHO	9001	47700	9/25/2009 11:55:03	9/25/2009 11:57:33	1
MAHADEV	10.184.53.175	CHO	MSDCUSAD	47710	9/25/2009 13:03:34	9/25/2009 19:31:42	-1
MAHADEV	10.184.53.175	CHO	SMDUSRDF	47703	9/25/2009 11:55:33	9/25/2009 12:57:33	1
MAHADEV	10.184.53.175	CHO	LOGIN	48349	9/25/2009 19:31:42	9/25/2009 19:42:05	1
MAHADEV	10.184.53.175	CHO	GWDEXSYS	48355	9/25/2009 19:38:17	9/25/2009 19:42:02	1
MAHADEV	10.184.53.175	CHO	GWDEXFUN	48356	9/25/2009 19:38:26	9/25/2009 19:42:00	1
MAHADEV	10.184.53.175	CHO	LOGIN	51719	10/1/2009 14:35:17	10/1/2009 15:05:01	1
MAHADEV	10.184.53.175	CHO	SMDUSHOL	51771	10/1/2009 14:55:16	10/1/2009 14:59:02	1
MAHADEV	10.184.53.175	CHO	LOGIN	51868	10/1/2009 15:29:20	10/5/2009 15:39:50	-1
MAHADEV	10.184.53.175	CHO	SMDUSHOL	51870	10/1/2009 15:29:44	10/5/2009 15:39:50	-1
MAHADEV	10.184.53.175	CHO	LOGIN	53511	10/5/2009 16:15:19	10/6/2009 15:44:24	-1

You can query for records based on the following criteria:

- User ID
- Branch Code
- Function ID

Click 'Search' button. Based on your preferences, the system identifies all records satisfying the criteria and displays the following details for every record:

- User ID
- IP Address
- Branch Code
- Function ID
- Sequence No
- System Start Time
- System End Time
- Exit Flag

3.11 Viewing Branch Status

You can view the host connectivity status of various branches through the 'Branch Status' screen. You can invoke this screen by typing 'SMSBRNST' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button. The screen is displayed as below:

Branch Code	Branch Name	Branch Status
FF1	BANK FUTURA & BRANCH	Online
RA1	RA1 BRANCH FOR LC	Online
RA2	RA2 BRANCH FOR LC	Online
MMT	American Bank, Main Branch	Offline
TRD	BANK OF INDIA-TRADE BRANCH	Online
TFD	TRADE FINANCE BRANCH FOR LC	Online
920	CITI Bank - Trade Branch	Online
PCB	PC Branch	Online
AAA	AAA BRANCH	Online
AAB	AAB BRANCH	Online
SET	SET Bank	Offline
HDB	HDFC Bank Bangalore	Offline
FF6	BANK FUTURA - BRANCH OFFICE	Online
FF7	BANK FUTURA - BRANCH OFFICE	Online
SO1	BANK FUTURA - HEAD OFFICE	Online

You can query for records based on the following criteria:

- Branch Code
- Branch Name
- Branch Status

Click 'Search' button. Based on your preferences, the system identifies all records satisfying the criteria and displays the following details for every record:

- Branch Code
- Branch Name
- Branch Status

4. Error Codes and Messages

4.1 Error Codes

Error Code	Message
SM-00001	Unauthorized installation. Contact Oracle Financial Services representative
SM-00002	Licensed number of users exceeded. Try again after a while
SM-00003	Guest ids can sign on only via change branch function
SM-00004	Invalid login
SM-00005	User already logged in
SM-00006	User status is disabled. Please contact your system administrator.
SM-00007	User status on hold. Contact your system administrator
SM-00008	Your time level does not permit you to log in. Contact your branch system administrator
SM-00009	Please change password now!
SM-00010	Password file missing or corrupt
SM-00011	Contact your system administrator. Oracle built in problem
SM-00012	SMTBS_passwords table missing or entries not found
SM-00014	Password due to expire on \$1
SM-00015	User profile expired. Contact branch system administrator
SM-00016	Your time level does not permit you to launch this function
SM-00030	This function is currently not available for execution
SM-00031	This form \$1 is not available. Contact your branch system administrator
SM-00032	The time level in the branch has changed. Your time level does not permit you to execute any functions
SM-00033	The number of users currently executing functions in this module has exceeded the license limit.
SM-00034	This function is not available for customer access
SM-00035	This function is not available for staff access
SM-00036	Function ID is not correct. Enter function ID again

Error Code	Message
SM-00037	Main menu and sub menu descriptions cannot be same
SM-00040	Wrong password. Enter password again
SM-00041	The new and confirmed passwords do not match. Enter passwords again
SM-00042	The password entered is restricted. Try another password
SM-00043	The password entered has already been used. Try another password
SM-00044	Length of password is less than \$1 characters
SM-00045	Length of password is more than \$1 characters
SM-00046	The password string contains special characters that are not allowed. Retype password
SM-00050	Control clerks passwords do not match. Retype passwords again
SM-00060	There are users currently logged in with a lesser time level. Do you want to change?
SM-00070	You are currently executing some functions. Exit from those functions and try again
SM-00080	User ID already exists.
SM-00081	Negative amount not allowed
SM-00082	Start cannot be before today
SM-00083	End date cannot be before start date
SM-00084	Start date cannot be null
SM-00085	User profile saved
SM-00086	Could not save user profile
SM-00087	User profile deleted
SM-00088	Could not delete user profile
SM-00089	Mandatory or not null fields are missing
SM-00090	Role ID already exists
SM-00091	Users attached to the role. Cannot delete
SM-00092	Role deleted

Error Code	Message
SM-00093	Invalid role ID
SM-00094	Currency code not defined
SM-00095	Branch code not defined
SM-00096	Customer no not defined
SM-00097	Customer category not defined
SM-00098	Role profile saved
SM-00100	Cannot delete the role. There are users attached to this role.
SM-00101	Cannot delete function. There are users attached to this function.
SM-00102	Cannot modify function. There are users attached to this function.
SM-00103	Do you want to delete the user?
SM-00104	Do you want to delete the role?
SM-00105	Cannot delete role. Users attached to role.
SM-00110	Site code length cannot be less than 4 characters
SM-00111	Cumulative invalid logins - number should be greater than 5 and less than 100
SM-00112	Successive invalid logins - number should be greater than 2 and less than 6
SM-00113	Password prevent reuse value should be between 1 and 5
SM-00114	Minimum password length should be between 6 and 10
SM-00115	Maximum password length should be between 9 and 12
SM-00116	Graph not found. Contact your branch administrator
SM-00117	Password change after message - no of days should be greater than 15 and less than 180
SM-00118	Archival period should be greater than 0
SM-00119	Enter the role description
SM-00120	Cannot delete/modify role of other branch
SM-00121	Idle time before sign off should be between 30 and 600
SM-00122	Password expiry message - between 0 and 5

Error Code	Message
SM-00123	Enter a valid module ID
SM-00125	Min password length should be less than Max password length
SM-00126	Override idle time should be greater than 10
SM-00130	User access to \$1 \$2 denied
SM-00131	Duplicate values encountered
SM-00140	Guest ID not defined in branch \$1
SM-00150	Maximum value encountered
SM-00160	Users attached to the language code. Cannot delete
SM-00161	Language code already exists. Try another one
SM-00170	Reserved word cannot be used
SM-00500	Mandatory values missing or null
SM-00501	Activation key contains irrelevant characters. Wrong activation key
SM-00502	Installation with this key already done. Cannot duplicate
SM-00503	Installation not done. Contact BSA or Oracle Financial Services representative
SM-00510	No branches defined for user
SM-00520	Could not delete function. Role attached
SM-00530	Could not delete function. Users attached
SM-00171	Max password Length can not be null
SM-00172	Min password Length can not be null
SM-00173	Min password alphabets length can not be greater than Max password alphabets length
SM-00174	Min password alphabets length can not be greater than Max password length
SM-00175	Min password alphabets length + Max password numeric length can not be greater than Max password Length
SM-00176	Min password alphabets length + Min password numeric length can not be greater than Min password Length
SM-00177	Min password numeric length can not be greater than Max password numeric length

Error Code	Message
SM-00178	Min password numeric length can not be greater than Max password length
SM-00179	Min password numeric length + Max password alphabets length can not be greater than Max password Length
SM-00180	Max password alphabets length can not be lesser than Min password alphabets length
SM-00181	Max password alphabets length can not be greater than Max password length
SM-00183	Max password numeric length can not be greater than Max password length
SM-00184	Max password numeric length can not be lesser than Min password numeric length
SM-00185	Password can not contain more than \$1 consecutive characters
SM-00186	Password should contain atleast \$1 Numeric characters
SM-00187	Password should contain atleast \$1 Alphabetic characters
SM-00188	Min password alphabetic length can not be lesser than Min password length
SM-00189	Min password numeric length can not be Greater than Min password length
SM-00200	Maximum No of Consecutive Characters should be Greater than 0
SM-00201	The transaction amount exceeds the maximum input amount for the user
SM-00202	The User is Un-Authorized
SM-00203	The Last Login date was - \$1
SM-00204	Failed to validate transaction limits for the User
SM-00205	Limits Id already exists
SM-00206	Dormancy Days Should be Greater than 0
SM-00207	Warning Screen Text can not be Null
SM-00208	Role Limits attached to the User are Unauthorized
SM-00209	Restriction type cannot be null
SM-00251	Value for legal notice is needed.
SM-00252	Value for legal notice is not needed.
SM-00300	Values for user limits are not applicable for the chosen transaction limit
SM-00301	Values for role limits are not applicable for the chosen transaction limit

Error Code	Message
SM-00500	Mandatory values missing or null
SM-00501	Activation key contains irrelevant characters. Wrong activation key
SM-00502	Installation with this key already done. Cannot duplicate
SM-00503	Installation not done. Contact BSA or i-flex representative
SM-00510	No branches defined for user
SM-00520	Could not delete function. Role attached
SM-00530	Could not delete function. Users attached
SM-00540	Could not delete function
SM-00550	Function successfully saved
SM-00560	Function not implemented
SM-00610	No functions defined for the user
SM-00612	You are not logged on
SM-00900	Process completed
SM-00901	Please select user ids to Enable
SM-00998	Password should be alphanumeric
SM-00999	First and last letter cannot be numeric
SM-01000	Invalid password. Bad sign on
SM-01001	Invalid name. Bad sign on
SM-01002	Successive invalid logins. Forced disable
SM-01003	Cumulative invalid logins. Forced disable
SM-01004	Password expired. Password changed
SM-01005	User initiated password change.
SM-01006	Forced password change
SM-01007	Status enabled
SM-01008	Status put on hold
SM-01009	No of licensed users for modules exceeded

Error Code	Message
SM-01010	No of licensed users for bank exceeded
SM-01011	Wrong activation key entered
SM-01012	Duplicate terminal ID encountered.
SM-01013	SMS user profile cleared
SM-01014	Restricted access program invoked by control clerks
SM-01015	User profile definition form invoked
SM-01016	Role profile definition form invoked
SM-01017	SMS bank parameters definition form invoked
SM-01018	Wrong control clerk password entered
SM-01019	Function id is not available for current module
SM-01099	Your Current amount decimal separator is not '\$1'. Please ask IT to change machine oracle settings.'
SM-01100	Entries in SMS bank parameters missing
SM-01101	Could not get today s date for the head office
SM-01102	Bank code not maintained in branch table
SM-01103	Local currency not maintained in bank table
SM-01104	User already signed on
SM-01105	User \$1 in branch \$2 changed branch to branch \$3 as user \$4
SM-01205	Both Passwords expired. Change Password Now
SM-01206	Password1 expired. Change Password Now
SM-01207	Password2 expired. Change Password Now
SM-0200	Cannot restrict current password
SM-02000	Internal error: exception raised in \$1
SM-02001	Enter from date
SM-02002	Enter to date
SM-02003	From date cannot be later than to date

Error Code	Message
SM-02004	Enter from time
SM-02005	Enter to time
SM-02006	From time cannot be later than to time
SM-02007	Select all users to use purge option
SM-02008	Role ID should be entered
SM-02009	User ID should be entered
SM-05000	Installation successful
SM-06001	User does not exist
SM-06500	Document Long Description is Mandatory
SM-0999	You do not have access to this function
SM-09999	Internal error: unhandled exception raised
SM-10000	Do you want to reset cumulative invalid logins to 0?
SM-10001	Head office branch code is not valid
SM-10002	Language code must be 3 characters
SM-10003	Branch is closed
SM-10004	Number of invalid logins since last logout = \$1
SM-10005	This Function has been linked to a role
SM-3001	User does not have rights
SM-3002	Incorrect User ID or password
SM-555555	Sign off allowed only from home branch
SM-555556	Logout allowed only from home branch
SM-555557	Triggers in the database are disabled. Please contact System Administrator.
SM-66666	Amount exceeds users authorization limit
SM-66666	Amount exceeds users authorization limit
SM-700007	Terminal ID should be Four Characters in Length

Error Code	Message
SM-7001	Invalid User Id or Password
SM-7002	User does not have rights
SM-7003	Invalid Login
SM-7004	User already logged in
SM-7005	User Status is Disabled
SM-7006	User Status on Hold
SM-7007	Your Time level does not permit you to Login
SM-7008	Please change Password now!
SM-7010	Password file missing or corrupt
SM-7011	Oracle built in problem
SM-7012	Password due to expire on \$1
SM-7013	User Profile expired
SM-7014	Wrong Password
SM-7015	Enter Password again
SM-7016	The New and Confirmed Passwords do not match
SM-7017	Enter Passwords again
SM-7018	The Password entered is Restricted. Try another Password
SM-7019	The Password entered has already been used. Try another Password
SM-7020	Length of Password is less than \$1 characters
SM-7021	Length of Password is more than \$1 characters
SM-7022	The Password string contains special characters that are not allowed. Retype Password
SM-7023	Password cannot contain more than \$1 consecutive identical characters
SM-7024	You cannot change Password today

Error Code	Message
SM-7025	The password should be mix of alphabetic and numeric characters
SM-7026	Control Clerks Passwords do not match. Retype Passwords again
SM-7027	There are Users currently logged in with a lesser time level. Do you want to change?
SM-7028	User Id already exists.
SM-7029	Cumulative Invalid Logins - Number should be greater than 5 and less than 100
SM-7031	Password prevent reuse value should be between 1 and 5 Minimum
SM-7032	Password length should be between 6 and 10
SM-7033	Maximum Password Length should be between 9 and 12
SM-7034	Password expiry message - between 0 and 5
SM-7035	Password change after message - no of days should be greater than 15 and less than 180
SM-7036	User Access to \$1 \$2 denied
SM-7037	Consecutive Password Characters should be greater than 1
SM-7038	The User is un-authorized
SM-7039	The Last Login date was - \$1
SM-7040	Password Changed Successfully
SM-7041	Invalid Password. Bad Sign On
SM-7042	Invalid Name. Bad Sign On
SM-7043	Successive Invalid Logins
SM-7044	Forced Disable Cumulative Invalid Logins
SM-7045	Forced Disable Password expired.
SM-7046	Password changed
SM-7047	User initiated Password change
SM-7048	Forced password change

Error Code	Message
SM-7049	Status Enabled
SM-7050	Status put on
SM-7051	Hold User already Signed on
SM-7052	Do you want to reset Cumulative Invalid Logins to 0 ?
SM-7053	Number of Invalid Logins Since Last Logout = \$1
SM-7054	User Password Changed Successfully
SM-7055	Change password now!!
SM-7056	Terminal Id not set
SM-7057	Message Digest not matched
SM-7058	User Not Logged In. Please login again
SM-7059	Fast Path Cannot Contain Special Characters
SM-7060	Currency sold and Currency bought can not be same.
SM-7070	Branch date is ahead of host date, cannot proceed
SM-77777	User does not have rights to authorize the override
SM-AUTH01	The transaction amount exceeds the maximum authorization amount for the User
SM-BRN01	Not a Valid user for Branch
SM-BRN02	Password for Branch User cannot be null
SM-BVALUE1	\$1 Back value days cannot be null
SM-C0050	Invalid Branch Code
SM-C0051	Function ID Already attached
SM-C0052	Branch or Function id should not be null
SM-CHBRLO	Change Branch to Home Branch In-Order to Logoff.
SM-CHBRSO	Change Branch to Home Branch In-Order to Signoff.

Error Code	Message
SM-CLBRN01	Branch User Profile Updated at Host
SM-CLS001	Users attached to Role. Close?
SM-CV001	Sequence no cannot be null
SM-CV002	Sequence no is a numeric field
SM-CV003	Group ID cannot be null
SM-CV004	Module code cannot be null
SM-CV005	Source code cannot be null
SM-CV006	Template ID cannot be null
SM-CV007	Duplicate broker ID
SM-CV008	Liquidation code cannot be null
SM-CV009	Duplicate details in record not allowed
SM-CV010	Basis amount to cannot be null
SM-CV011	Floor basis amount has to be less than basis amount to
SM-CV012	Rate cannot be null for percentage type
SM-CV013	Min amount cannot be more than floor charge for percentage type
SM-CV014	Max amount cannot be less than floor charge for percentage type
SM-CV015	Flat amount cannot be null for flat amount type
SM-CV016	Invalid rate, rate is too high
SM-CV017	Floor basis amount cannot be null
SM-CV018	Floor charge cannot be null
SM-CV019	Basis amount to cannot be less than basis amount from
SM-CV020	Duplicate rule code
SM-CV021	Minimum amount must be less than maximum amount

Error Code	Message
SM-CV022	Maximum amount must be more than minimum amount
SM-CV023	Rule cannot be null
SM-CV024	Group already exists
SM-CV025	The record is already closed
SM-CV026	Intermediate table has to be entered
SM-CV027	Upload table has to be entered
SM-CV028	Cube table has to be entered
SM-CV029	Source field cannot be null
SM-CV030	Destination field cannot be null
SM-CV031	Destination field already maintained
SM-CV032	Group ID already maintained
SM-CV033	Template ID already maintained for this group
SM-CV034	Sequence no already maintained for this group
SM-CV035	Invalid column name
SM-DATE1	Failed to convert date format
SM-DEMO01	Oracle FLEXCUBE not properly installed, exiting!
SM-DEMO02	Demo version will expire after \$1 day(s)
SM-DEMO03	Welcome to Oracle FLEXCUBE
SM-DEMO04	Only one user is allowed to login in demo version of Oracle FLEXCUBE, exiting!
SM-DEMO05	Insufficient parameters to launch Oracle FLEXCUBE, exiting!
SM-DEMO06	Oracle FLEXCUBE demo version does not allow this function
SM-DEMO07	Demo version expired, please contact i-flex!!!
SM-DEMO08	Demo version allows only \$1 contracts.


Error Code	Message
SM-DEMO09	Demo version expires today
SM-DTCH01	Users are running functions.
SM-DTCH02	AEOD dates not maintained
SM-DTCH03	Wrong branch status to run this form
SM-EFIN01	Users in transactions input
SM-EXTUS	Oracle FLEXCUBE has been launched from another application. Sign off disallowed. Please exit
SM-FND01	Menu items not populated
SM-PRD02	Deletion not allowed as periods beyond \$1 exist for the financial cycle
SM-PRD03	The period end date has to be the last day of a month
SM-PWC01	Password same as previously used password
SM-QRY-01	The form is in the enter-query mode. Please click on the exit toolbar button or exit menu item to get to the normal mode.
SM-QRY01	The form is in the enter-query mode. Please click on the exit toolbar button or exit menu item to get to the normal mode.

5. Reports

5.1 Events Log Report

The Events Log report gives details of all events that occurred over a period in time. You can specify the period for which you require the report when you invoke the report function. In the Application Browser, this report is available under the SM module.

To invoke this screen type 'SMRPEVLG' in the field at top right corner of the Application tool bar and click the adjoining arrow button.

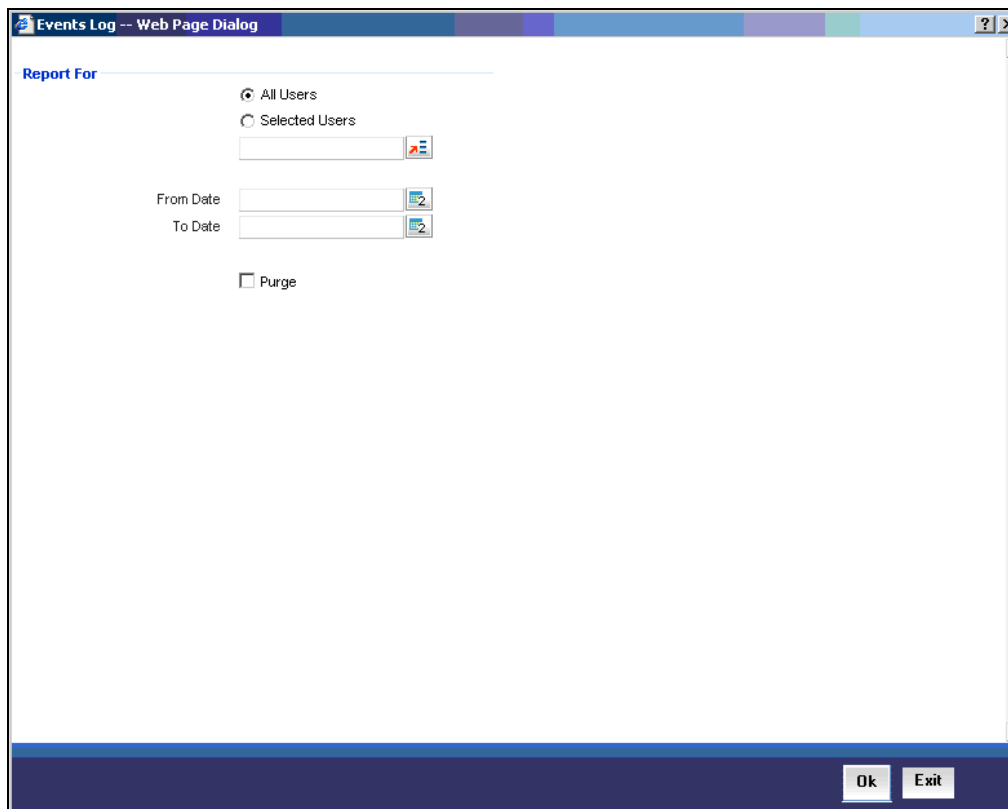

The screenshot shows a web page dialog box titled "Events Log -- Web Page Dialog". The dialog has a "Report For" section with two radio buttons: "All Users" (selected) and "Selected Users". Below "Selected Users" is an empty text input field with a small icon to its right. There are two date input fields: "From Date" and "To Date", each with a small icon to its right. A "Purge" checkbox is located below the date fields. At the bottom right of the dialog are "Ok" and "Exit" buttons.

5.1.1 Contents of the Events Log

The contents of this report are discussed under the following heads:

Header

The Header carries the title of the report, information on the branch code, the ID of the user who generated the report, the date and time at which it was generated, the branch date, the modules covered in the report.

Body of the report

The following details are displayed in the report

User ID	The user who initiated the event.
Function Description	The name of the function that activated the event.
Start Time	The time at which the event was initiated.
End Time	The time at which the event was successfully completed or was aborted. If the event has not been completed, or 'Not Yet' is displayed here.
Branch Code	The code allotted to the branch .
Terminal ID	The system ID where the application is launched
System Start Time	The time when the user starts the application
System End Time	The time when the user signs out of the application

Total time spent on individual functions by individual users is also provided.

5.2 Security Management System Violations Log Report

Any attempt at violating the security of the system will be reported in the Security Violations report. You can generate this report for a particular period. In the Application Browser, this report is available under the SM module.

To invoke this screen type 'SMRPVLLG' in the field at top right corner of the Application tool bar and click the adjoining arrow button

5.2.1 Contents of the Security Management System Violations Log Report

The contents of this report are discussed under the following heads:

Header

The Header carries the title of the report, information on the branch code, the ID of the user who generated the report, the date and time at which it was generated, the branch date, the modules covered in the report.

Body of the report

The following details are displayed in the report


User-ID	The user who was involved in the security management system violation.
Start Time	The time at which the security management system was violated.
Message	The error message if any displayed by the system during validation
Function Description	The description of the function that was executed by the user, which resulted in the violation.
Terminal ID	The terminal-ID of the terminal onto which the user was logged.

5.3 User Profile Report

The details of all the user profiles that have been defined are available in the form of a report. The User Profile Report gives details of user profiles maintained for all or specific users. It includes:

- The functions attached to the role.
- The roles to which the user is attached.
- Amount limits for each user.
- Branches in which the user can operate.
- Currencies the user can use.
- Customers the user can deal with.
- Restrictive passwords defined for the user.

To invoke the screen, go to **Security Maintenance** on the Application Browser. Click **User Administration** and select **Current Users** under it. Otherwise, use the code 'SMDCUUSR' on the field at the top right corner of the Application tool bar and click on the adjoining arrow button.

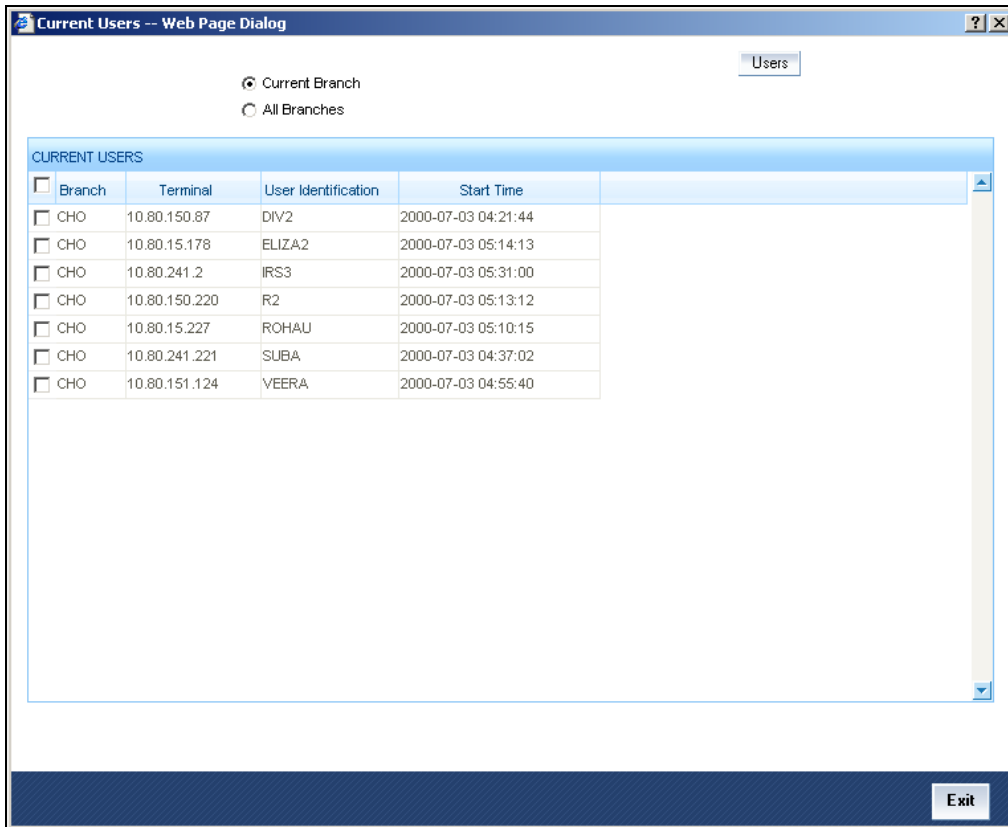

5.3.1 Contents of the User Profile Report

Branch Code and Name	The code allotted to the branch and the full name of the branch.
Date and Time	At which the report was generated.
Printed by	The user who has generated the report.
Spool File	If the report has been printed onto a spool file, the name of the spool file is given here.
Sort on	The criteria on which the details have been sorted.
Date Range	The period for which the report is generated.
User-ID	The ID of the user whose details are being reported.
Name	The name of the user whose details are being reported.
Time Level	The time level of the user.
Language Code	The language assigned to the user.
Profile Expires On	The date on which the user profile is due to expire.
Status	The status of the user - enabled, on hold or disabled.
Function-ID	The function allowed for the user.

Function Description	The description of the function.
Link with Role Definition	If the user has been linked to a role, the role-ID is given here.
Maximum Transaction Amount	The maximum amount that the user can enter in a single transaction.
Maximum Authorization Amount	The maximum amount that a transaction can have if it has to be authorized by this user.
Branch Code	The branch in which the user profile is defined.
Branch Name	The name of the branch in which the user has signed on.
Currency Code	The S.W.I.F.T code of the currency in which the user can operate.
Currency Name	The name of the currency in which the user can operate.
Customer Code	The customer whose accounts can be handled by the user.
Customer Name	The name of the customer whose accounts can be handled by this user.
Restrictive Passwords - User	The passwords defined as restrictive passwords for the user.


5.4 Changes Report

This report gives details of maintenance done on the following screen:

- Static Parameters screen
- Static User Profile Details screen
- Dynamic User Profile Details screen
- Static Role Profile Details
- Static User Profile Details

You can generate this report for a particular period. In the Application Browser, this report is available under the SM module.

To invoke this screen type 'SMRPCHLG' in the field at top right corner of the Application tool bar and click the adjoining arrow button

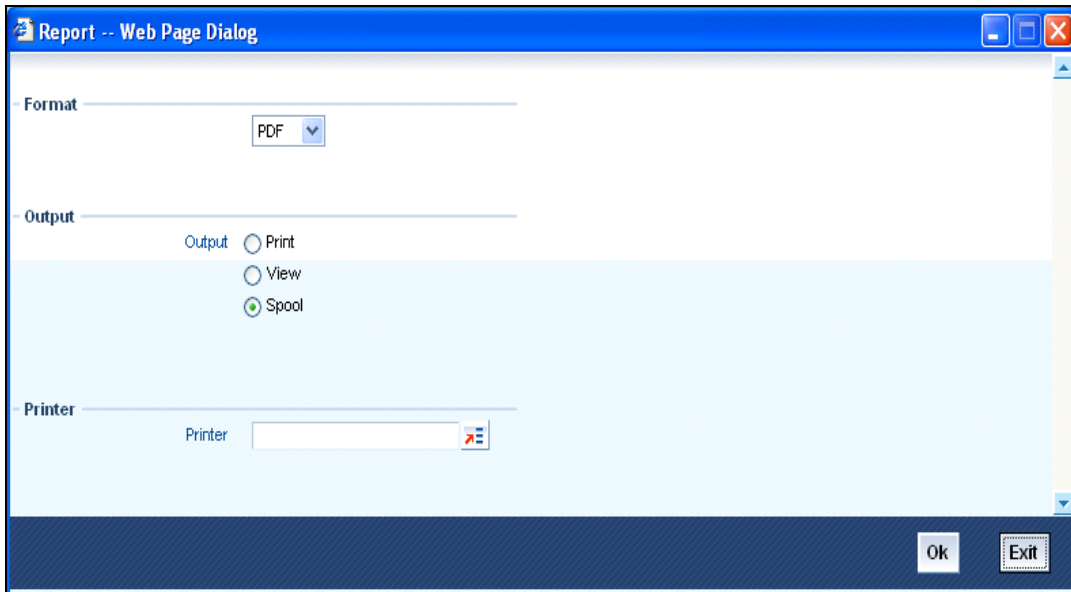

5.4.1 Contents of the Changes Report

The contents of this report are discussed under the following heads:

Header

The Header carries the title of the report, information on the branch code, the ID of the user who generated the report, the date and time at which it was generated, the branch date, the modules covered in the report.

Body of the report

The following details are displayed in the report

Field Name	The field that has been maintained
Input by	The Id of the person who input the details of the transaction
Old Value	The value in the field before it was modified
New Value	The value in the field after it was modified
Date & Time	The date and time of the transaction
Auth By	The Id of the person who authorized the transaction
Date & Time	The date and time when the transaction was authorized
Record Stat	The status of the record
Auth Stat	The authorization status
Function Id	The function Id
Mod No	The module number

5.5 Inactive Users Aging Analysis Report

This report gives details of users who have not used the system over a certain period. You should enter the period when you invoke the report. The details are sorted in ascending order of the date from which the user has not used the system.

In the Application Browser this report is available under Security Maintenance in the reports generator. Click 'OK' button if you want to generate this report. To come out of this screen without generating the report click 'Exit' button.


5.5.1 Contents of the Inactive Users Aging Analysis Report

User-ID	The ID of the user who has not been using the system
Inactive Since	The date from which the user has not accessed the system
Status	The status of the user - enabled, disabled, hold, inactive
Inactivity Period	The number of days for which the user has not used the system

5.6 Inactive Users Log Report

This report gives details of users who have not used the system over a certain period. You should enter the period when you invoke the report. The details are sorted in ascending order of the date from which the user has not used the system. In the Application Browser, this report is available under the SM module.

To invoke this screen type 'SMRPINST' in the field at top right corner of the Application tool bar and click the adjoining arrow button.

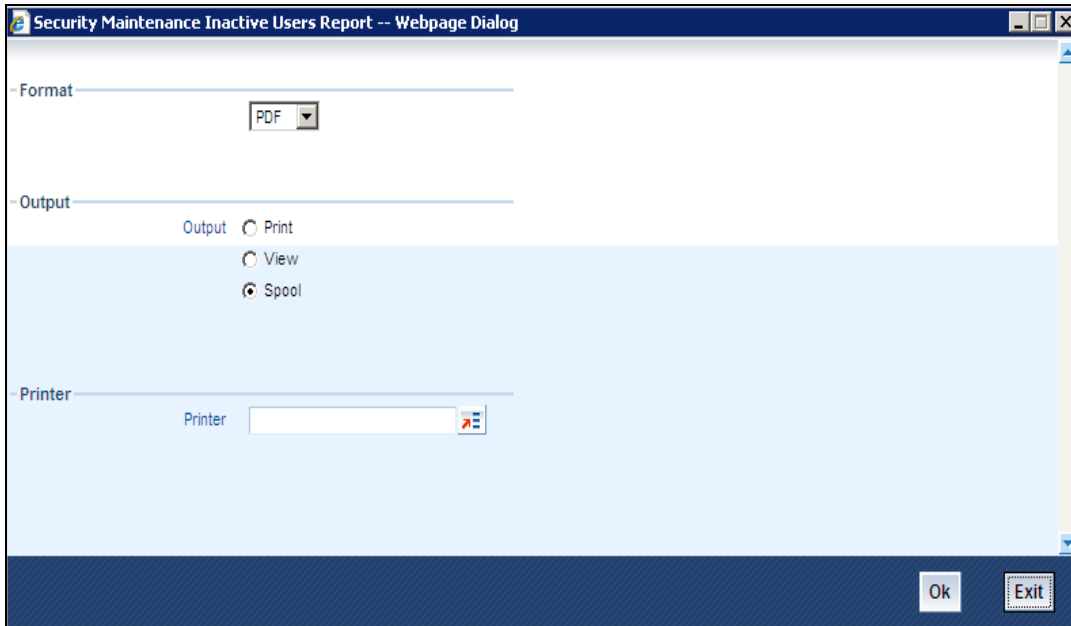

The screenshot shows a dialog box titled "Security Maintenance Inactive Users Report -- Webpage Dialog". It contains the following fields and options:

- Format:** A dropdown menu currently set to "PDF".
- Output:** Three radio button options: "Print", "View", and "Spool". The "Spool" option is selected.
- Printer:** A text input field labeled "Printer" with a small icon to its right.
- Buttons:** "Ok" and "Exit" buttons are located at the bottom right of the dialog.

5.6.1 Contents of the Inactive Users Log Report

The contents of this report are discussed under the following heads:

Header

The Header carries the title of the report, information on the branch code, the ID of the user who generated the report, the date and time at which it was generated, the branch date, the modules covered in the report.

Body of the report

The following details are displayed in the report

User-ID	The ID of the user who has not been using the system
Home Branch	The home branch of the bank.
Last Signed On	The date from which the user has not accessed the system
Inactive For (In days)	The number of days for which the user has not used the system
Status	The status of the user - enabled, disabled, hold, inactive



Security Management System
[January] [2016]

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax: +91 22 6718 3001

www.oracle.com/financialservices/

Copyright © [2016], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.