

# Oracle® Banking APIs

## Installation Guide



Innovation Release 25.1.2.0.0

G51526-01

April 2026

ORACLE®

Copyright © 2006, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

Purpose	i
Audience	i
Documentation Accessibility	i
Critical Patches	i
Diversity and Inclusion	ii
Conventions	ii
Related Resources	ii
Screenshot Disclaimer	ii
Acronyms and Abbreviations	ii

## 1 Introduction

---

1.1 Purpose of the Document	1
-----------------------------	---

## 2 Prerequisites

---

## 3 Installation

---

3.1 Installation Process	10
3.1.1 Step 1: Selecting the Product	10
3.1.2 Step 2: Selecting the Installation Flavour	11
3.1.3 Step 3: Selecting the Installation Type	11
3.1.4 Step 4: Selecting the Installation Version	12
3.1.5 Step 5: Selecting the Component	12
3.1.6 Step 6: Selecting the Installation Mode	13
3.1.7 Step 7: Verification Screen	14
3.1.8 Step 8: Entering Required Credentials	15
3.1.9 Step9: OBAPI Routing Hub screen appears	17
3.1.10 Step10: Finalizing Installation	17

4	Installation using Silent Mode	
5	Installer Verification	
6	Installer Scope	
7	Post Installation Steps	
8	OBAPI Logging Configuration	
9	OBAPI Product Verification	
10	Multi Entity	
11	Multi-entity installation using Silent Mode	
12	Steps to Create Credential Mapping	
13	OBAPI Product Security	
14	OBAPI Product – Best Practice	
14.1	Tablespace for AUDIT INDEX	1
15	JPA and OBAPI multi-cluster	

## 16 Troubleshoot Overview

---

### Index

---

# Preface

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Conventions](#)
- [Related Resources](#)
- [Screenshot Disclaimer](#)
- [Acronyms and Abbreviations](#)

## Purpose

This guide is designed to help acquaint you with the Oracle Banking application. This guide provides answers to specific features and procedures that the user need to be aware of the module to function successfully.

## Audience

This document is intended for the following audience:

- Customers
- Partners

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

## Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches, Security Alerts and](#)

[Bulletins](#). All critical patches should be applied in a timely manner to ensure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Related Resources

For more information on any related features, refer to the following documents:

- Oracle Banking APIs Installation Manuals

## Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes.

## Acronyms and Abbreviations

The list of the acronyms and abbreviations used in this guide are as follows:

**Table 1 Acronyms and Abbreviations**

Abbreviation	Description
OBAPI	Oracle Banking APIs



# 1

## Introduction

- [Purpose of the Document](#)

### 1.1 Purpose of the Document

The purpose of the OBAPI Installation Manual is to provide a step by step overview on the installation process of the solution.

It includes:

- Reference to prerequisites software installation required for OBAPI & OBAPI installer
- Setup of OBAPI with Oracle's own Core Banking and Origination Products along with Third-party HOST system.
- Running the installation in silent mode
- Advanced Configurations (Post installation)
- Installation Verification
- Multi-Entity Installation and configuration
- Best Practice
- Troubleshoot Overview

# 2

## Prerequisites

OBAPI pre-requisite software should be installed and available before proceeding.

For OBAPI pre-requisite software setup refers document **Oracle Banking Digital Experience Installer Pre-Requisite Setup Manual**.

Installer Pre-requisite Installation

**Python 3.11 for Linux Operating System : --**

1. Execute below commands to install the python 3.11.9

```
dnf
    groupinstall 'development tools' dnf install
    bzip2-devel expat-devel gdbm-devel ncurses-devel openssl-devel
readline-devel wget
    sqlite-devel tk-devel xz-devel zlib-devel
libffi-devel wget
    https://www.python.org/ftp/python/3.11.9/Python-3.11.9.tgz
tar -xzf
    Python-3.11.9.tgzcd
    Python-3.11.9./configure
    --enable-optimizationsmake
    altinstallpython3.11
    -version
```

```
[devops@obdxwls /]$ python3.11 -V
Python 3.11.9
```

2. Once above steps are executed successfully install the following required modules.

```
pip3.11 install --upgrade pip
pip3.11 install cx-Oracle==8.3
```

```
root@~ Python-3.11.0]# pip3.11 install cx-Oracle==8.1.0

Collecting cx-Oracle==8.1.0
  Downloading https://files.pythonhosted.org/packages/51/3a/f63cf2eec42b32874af13f0a2deb5d41a
  829kB 130kB/s

Installing collected packages: cx-Oracle
Successfully installed cx-Oracle-8.1.0
```

```
pip3.11 install urwid==2.6.14
```

```
root@~ Python-3.11.0]# pip3.11 install urwid==2.6.14

Collecting urwid==2.6.14
  Using cached urwid-2.6.14.tar.gz (650 kB)
  Using legacy 'setup.py install' for urwid, since package 'wheel' is not installed.

Installing collected packages: urwid
  Running setup.py install for urwid ... done

Successfully installed urwid-2.6.14
```

### Installer Pre-requisite verification

Post installation of OBAPI Installer prerequisite software's, verification can be done using below steps.

#### ① Note

Verification should be performed on Server where Oracle Weblogic is locally installed and by OS user (which is owner for Oracle Weblogic home directory) for non-root steps. The same user will be used to execute installer.

### Oracle Instant client

1. Login using root user.
2. Run below command to verify if Oracle Instant client is installed.

```
rpm -qa | grep oracle
```

```
[root@cfss-4m77-171 ~]# rpm -qa | grep oracle
oracle-cloud-agent-1.11.4-5207.el8.x86_64
oraclelinux-release-8.3-1.0.4.el8.x86_64
oraclelinux-release-el8-1.0-16.0.1.el8.x86_64
oracle-cloud-agent-1.10.0-4792.el8.x86_64
oraclelinux-developer-release-el8-1.0-6.el8.x86_64
oracle-epel-release-el8-1.0-3.el8.x86_64
oracle-logos-80.5-1.0.6.el8.x86_64
oracle-instantclient19.10-basic-19.10.0.0.0-1.x86_64
[root@cfss-4m77-171 ~]#
```

OBAPI pre-requisite software should be installed and available before proceeding.

For OBAPI pre-requisite software setup refers document **Oracle Banking APIs Installer Pre-Requisite Setup Manual** .

## Installer Pre-requisite verification

Post installation of OBAPI Installer prerequisite software's, verification can be done using below steps.

### Note

Verification should be performed on Server where Oracle Weblogic is locally installed and by OS user (which is owner for Oracle Weblogic home directory) for non-root steps. The same user will be used to execute installer.

## Oracle Instant client

1. Login using root user.
2. Run below command to verify if Oracle Instant client is installed.

```
rpm -qa | grep oracle
```

```
[devops@obdxwls /]$ python3.11 -V  
Python 3.11.9
```

### Note

Above package verification command is specific to Oracle Linux and RHEL distributions only. For other Linux distributions or OS please refer to OS specific package manager documentation.

## Python:

1. Execute python -V command

```
python3.11 -V
```

```
[devops@obdxwls /]$ python3.11  
Python 3.11.9 (main, Dec 9 2024, 00:00:00) [GCC 11.5.0 20240719 (Red Hat 11.5.0-2.0.1)] on linux  
Type "help", "copyright", "credits" or "license" for more information.  
>>> import urwid  
>>> urwid.__version__  
'2.6.14'  
>>> █
```

### Note

Ensure Python 3.11.9 supported version is installed. Above command should reflect the same.

## cx\_Oracle & Urwid:

1. Execute python command

```
python
```

**Note**

Ensure Python 3.11.0 version should be available in PATH variable. Above execution should be done using Python 3.11.0.

2. Import Urwid and check version

```
import urwid (Press Enter)
urwid.__version__
```

```
[devops@obdxwls ~]$ python3.11
Python 3.11.9 (main, Dec  9 2024, 00:00:00) [GCC 11.5.0 20240719 (Red Hat 11.5.0-2.0.1)] on linux
Type "help", "copyright", "credits" or "license()" for more
>>> import cx_Oracle
>>> cx_Oracle.version
'8.3.0'
>>>
```

If version is displayed, then Urwid is installed and available for use.

**Note**

Ensure Urwid 2.6.14 supported version is installed. Above command should reflect the same.

3. Similarly import cx\_Oracle and check version

```
import cx_Oracle (Press Enter)
cx_Oracle.version
```

```
[root@cfss-177-177-177 ~]# rpm -qa | grep oracle
oracle-cloud-agent-1.11.4-5207.el8.x86_64
oraclelinux-release-8.3-1.0.4.el8.x86_64
oraclelinux-release-el8-1.0-16.0.1.el8.x86_64
oracle-cloud-agent-1.10.0-4792.el8.x86_64
oraclelinux-developer-release-el8-1.0-6.el8.x86_64
oracle-epel-release-el8-1.0-3.el8.x86_64
oracle-logos-80.5-1.0.6.el8.x86_64
oracle-instantclient19.10-basic-19.10.0.0.0-1.x86_64
[root@cfss-177-177-177 ~]#
```

If version is displayed, then cx\_Oracle is installed and available for use.

**Note**

Ensure cx\_Oracle 8.3.3 supported version is installed. Above command should reflect the same.

# 3

## Installation

### Pre-Installation

- Install all the prerequisite software and packages mentioned above

### Steps of Installation

- Download and extract the installer zip file (Base).
- Navigate to “<OBAPI INSTALLER DIR>/installables/OBAPI/BASE/25.1.0.0.0/config.
- Open the “installer.properties” file to maintain key configurations for BASE ENTITY (OBAPI\_BU)

```
#####
# Installer Properties                                     #
#                                                         #
# All entries to be made immediately after the '=' and WITHOUT quotation marks. i.e. '' or "" #
#                                                         #
#####

#####
# Weblogic Details #
#                 #
#####

#Middleware home path. Example /home/obdxuser/Oracle/Middleware/Oracle_Home - where you have sub-directories like wlsuser,oracle_common et
MIDDLEWARE_HOME=/scratch/app/product/Oracle/Middleware/Oracle_Home

#JAVA home path. Example /home/obdxuser/jdk18 - where you have sub-directories like bin,jre,lib etc.
JAVA_HOME=/scratch/app/java

#DB_EXECUTION_TYPE FLYWAY OR CX_ORACLE.
DB_EXECUTION_TYPE=FLYWAY

#DB_EXECUTION_TYPE_HOME home path of flyway - where you have sub-directories like bin,jre,lib etc.
DB_EXECUTION_TYPE_HOME=/scratch/app/flyway

#GRADLE HOME path. Example /home/obdxuser/gradle
GRADLE_HOME=/scratch/app/gradle

#Path where OBDX config files needs to be installed. ****DO NOT KEEP INSTALLATION_HOME AS MIDDLEWARE_HOME or any existing directory.****
INSTALLATION_HOME=/scratch/app/
```

### IMPORTANT:

- Enter the values right after the “=” sign
- DO NOT change anything to the left of the “=”
- DO NOT change any of the flag values or pre-filled values (such as WLS\_JDBC\_DIGX\_NAME, WLS\_JDBC\_DIGX\_JNDI, Flag values etc) available in “**Factory Shipped**” section.
- Ensure there is no blank space after “=” sign, except specific flavor specific configuration.
- Throughout this document consider UBS as UBS core banking with OBPM as payments engine.

Only below parameters should be set in **installer.properties** file

Component	Parameter	Description	Example
<b>DB details (for OBAPI schema)</b>	<b>OBAPI_DATABASE_HOSTNAME</b>	Enter the hostname of the database server which would host the database schema for OBAPI	abc.xyc.com
	<b>OBAPI_DATABASE_PORT</b>	Enter the port number of the database listener	1521
	<b>OBAPI_DATABASE_SID</b>	Enter the Oracle Service Name for database instance	obdxdb.in.oracle.com
	<b>OBAPI_DATABASE_SYS_USER</b>	Enter the username with 'sys' privileges	Sys
	<b>POST_FIX</b>	For OBAPI schema name like "OBAPI_DEV" POST FIX is 'DEV'.	DEV
<b>SHOULD BE IN UPPERCASE ONLY.</b>			
	<b>OBAPI_DBA_DIRECTORY_NAME</b>	Enter the directory name in which you want the OBAPI schema tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OBAPI_DIR
	<b>OBAPI_AUDIT_DBA_DIRECTORY_NAME</b>	Enter the directory name in which you want the OBAPI AUDIT tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OBAPI_AUDIT_DIR
<b>EHMS DB details (to be configured only in-case of FLAVOR as UBS,FCORE&amp;OBPM)</b>	<b>EHMS_DATABASE_HOSTNAME</b>	Enter the hostname for EHMS database server	abc.xyz.com
	<b>EHMS_DATABASE_PORT</b>	Enter the port number of EHMS database listener	1521
	<b>EHMS_SCHEMA_NAME</b>	Enter the Complete OBAPI-EXT (B1A1) HostInterfaceschema name you want installer to create as new schema.	EHMS182SCHEMA
<b>SHOULD BE IN UPPERCASE ONLY.</b>			

Component	Parameter	Description	Example
	<b>EHMS_DBA_DIRECTORY_NAME</b>	Enter the directory name in which you want the OBAPI-EXT (B1A1) schema tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OPATCH_LOG_DIR
	<b>EHMS_DATABASE_SYS_USER</b>	Enter the username with 'sys' privileges	Sys
	<b>EHMS_DATABASE_SID</b>	Enter the EHMS database Service Name	obdxehms.in.oracle.com
	<b>EHMS_HOST_SCHEMA_NAME</b>	Enter the EXISTING EHMS HOST schema name	OBAPIUBS
	<b>EHMS_CCY(to be configured for UBS and OBPM HOST only)</b>	Enter the Country code for EHMS HOME Branch	GB
	<b>EHMS_HB (to be configured for UBS and OBPM HOST only)</b>	Enter the Branch code for code for EHMS HOME Branch	AT3
	<b>EHMS_FCORE_FCUBS_SCHEMA_NAME (to be configured for FCORE HOST only)</b>	FCORE-FCUBS schema name	FCRUBSHOST
<b>Weblogic server details</b>	<b>MIDDLEWARE_HOME</b>	Oracle Weblogic Server home path. Example /home/obapiuser/Oracle/Middleware/Oracle_Home - where you have sub-directories like wlserver,oracle_common etc.	/home/obapiuser/Oracle/Middleware/Oracle_Home
	<b>JAVA_HOME</b>	Path where JAVA (JDK) is installed	/home/obapiuser/jdk17_0_124
	<b>DB_EXECUTION_TYPE_HOME</b>	Path where FLYWAY is installed For CX_ORACLE, no need to update/can be empty	/home/obapiuser/flyway-8.3 <b>[No update required for cx_oracle]</b>
	<b>DB_EXECUTION_TYPE</b>	Database execution type	FLYWAY/CX_ORACLE
	<b>GRADLE_HOME</b>	Path where GRADLE is installed	/home/obapiuser/gradle-7.9



Component	Parameter	Description	Example
	<b>INSTALLATION_HOME</b>	Path where OBAPI is to be installed. All configuration files will be copied as a sub-directory "config" under this directory.  <b>DO NOT KEEP INSTALLATION_HOME AS MiddlewareHome.</b>	/home/obapiuser/obapi
	<b>WLS_DOMAIN_PATH</b>	Path where OBAPI Weblogic domain should be created. Users can now enter custom path as per their requirements.	/home/obapiuser/domains
	<b>WLS_CLUSTER_NAME</b>	Name of cluster; this cluster would have one single managed server.	obapi_cluster
	<b>WLS_CLUSTER_NODE_HOSTNAME</b>	Host name or IP address of managed server participating in the cluster. Currently only single node is supported.	abc.xyz.com
	<b>WLS_ADMIN_SERVER_PORT</b>	Weblogic AdminServer port. It is the port to access the administration console of the Weblogic server. Generally port 7001 is used as the AdminServer port. Custom port are supported.	7001
	<b>WLS_ADMIN_SERVER_SSL_PORT</b>	AdminServer SSL port. It is the port used to securely access (https) the administration console of the Weblogic server.	7002
	<b>WLS_NODE_PORT</b>	Node Manager Port. It is the port used by Node Manager to be configured for OBAPI domain. Generally, 5556 is utilized as Node Manager Port. Custom ports are supported.	5556

Component	Parameter	Description	Example
	WLS_MS_SERVER_NAME	Managed server name. This will be the name of the managed server created in the cluster followed by indexes. eg- If this is set as 'clip' managed servers would be clip1.	Clip
	WLS_MS_SERVER_PORT	Managed Server Port. Managed server will utilize this port for hosting OBAPI components and associated resources. Custom ports are supported.	9001
	WLS_DOMAIN_NAME	Enter Weblogic Domain name.	obapi_domain1
	WLS_DOMAIN_ADMIN_USER	Domain user ID. The user id will be used to access the Weblogic Administration console.	weblogic
	WLS_NODE_TYPE	Weblogic Node Manager type	Plain/SSL
	WLS_MACHINE_NAME	Weblogic Node Manager machine name	obapi_machine
	APP_ROOT_DIR	Any empty directory path	/scratch/app/dir
	WLS_JMS_FILEUPLOAD_PS (to be configured for all OBAPI supported HOST)	Set the paths for the persistent store of the FileUpload JMS modules.  <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obapi/FileUpload
	WLS_JMS_AUDIT_PS (to be configured for all OBAPI supported HOST)	Set the paths for the persistent store of the Audit JMS modules.  <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obapi/Audit

Component	Parameter	Description	Example
	<b>WLS_JMS_REPORT_PS (to be configured for all OBAPI supported HOST)</b>	Set the paths for the persistent store of the Reports JMS modules.  <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obapi/Reports
	<b>WLS_JMS_JPA_PS (to be configured for all OBAPI supported HOST)</b>	Set the paths for the persistent store of the JPA JMS modules.  <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obapi/JPA
	<b>WLS_JMS_EXTSYSRECEIVER_PS (to be configured for all OBAPI supported HOST)</b>	Set the paths for the persistent store of the ExtSystemReceiver JMS modules.  <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obapi/Receiver
	<b>WLS_JMS_EXTSYSENDE R_PS(to be configured for all OBAPI supported HOST)</b>	Set the paths for the persistent store of the ExtSystemSender JMS modules.  <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obapi/Sender

Component	Parameter	Description	Example
<b>OBAPI Application Administrator user details</b>	<b>OBAPI_ADMIN_USERNAME</b>	Set username for OBAPI application Admin user. USERNAME IS CASE SENSITIVE. In-case of OUD as provider username should be the User ID mentioned during user creation steps mentioned in pre-requisite document (refer To create User and mapping it to the Group section)	superadmin
	<b>OBAPI_ADMIN_EMAIL</b>	Enter the Email ID for OBAPI application admin user.	superadmin@oracle.com
	<b>OBAPI_ADMIN_CONTACT_NO</b>	Enter the mobile number for OBAPI application admin user.  <b>COUNTRY CODE IS MUST.</b>	+911234567890

**Note**

Apart from above any other property values should not be modified.

Ensure ORACLE\_HOME, JAVA\_HOME variable are set and their binaries are available in PATH variable before proceeding.

Login with OS user which was used to perform OBAPI pre-requisite software installation (or has ownership on Oracle Weblogic home directory)

Ensure OBAPI Installation home and filestore path's maintained in installer.properties exists and user running the installer has read-write permissions.

**Note**

When Proceeding with Product as OBRH or OBAPI+OBRH then only need to update OBRH\_config.properties.

Navigate to "<OBAPI INSTALLER DIR>/installables/OBAPI/BASE/25.1.0.0.0/config"

Open the "OBRH\_config.properties" file to maintain key configurations for BASE ENTITY (OBRH).

```

#Managed Server name. This will be the name of managed server created in the OBRH cluster. i.e. If this is set as 'clp' managed s
WLS_OBRH_MS_SERVER_NAME=obrh_server1

#Name of OBRH cluster.
WLS_OBRH_CLUSTER_NAME=obrh_cluster

#Managed Server port. Managed server in OBRH cluster will utilize this port for hosting OBDX components and associated resources.
WLS_OBRH_MS_SERVER_PORT=7005

#Enter the Database server hostname which will host OBRH and Weblogic RCU schema.
OBRH_DATABASE_HOSTNAME=*****

#Enter the Database server listener port no.
OBRH_DATABASE_PORT=61521

#OBRH Database SID.
OBRH_DATABASE_SID=obdx

#Enter the username with 'sys' privileges (Generally its 'sys').
OBRH_DATABASE_SYS_USER=sys

#Enter the directory name in which you want the OBRH schema tablespace datafile to be created.
#Logical name (i.e. DIRECTORY_NAME column) from DBA_DIRECTORIES table.
OBRH_DBA_DIRECTORY_NAME=OPATCH_LOG_DIR

#Enter the CMNCORE SCHEMA NAME.
CMNCORE_SCHEMA_NAME=OBRH_CMNCORE

# CMNCORE_SCHEMA_PASSWORD=

```

**IMPORTANT:**

- Enter the values right after the “=” sign
- DO NOT change anything to the left of the “=”
- Ensure there is no blank space after “=” sign, except specific flavor specific configuration. Throughout this document consider UBS as UBS core banking with OBPM as payments engine.

Only below parameters should be set in OBRH\_config.properties file

Component	Parameter	Description	Example
DB details (for OBAPI schema)	OBRH_DATABASE_HOSTNAME	Enter the hostname of the database server which would host the database schema for OBRH	abc.xyc.com
	OBRH_DATABASE_PORT	Enter the port number of the database listener	61521
	OBRH_DATABASE_SID	Enter the Oracle <b>Service Name</b> for database instance	obapidb.in.oracle.com
	OBRH_DATABASE_SYS_USER	Enter the username with 'sys' privileges	sys
	PLATO_SCHEMA_NAME	Enter the PLATO SCHEMA name.	OBRH_PLATO
	OBRH_DBA_DIRECTORY_NAME	Enter the directory name in which you want the OBRH schema tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OPATCH_LOG_DIR

Component	Parameter	Description	Example
Weblogic server details	<b>WLS_OBRH_MS_SERVER_NAME</b>	Managed server name. This will be the name of the managed server created in the cluster. <b>eg- If this is set as "obrh_server" managed servers would be "obrh_server" ..</b>	obrh_server
	<b>WLS_OBRH_CLUSTER_NAME</b>	Name of cluster; this cluster would have one single managed server.	obrh_cluster
	<b>WLS_OBRH_MS_SERVER_PORT</b>	Managed Server Port. Managed server will utilize this port for hosting OBRH components and associated resources. <b>Custom ports are supported.</b>	7005

**Note**

: Apart from above any other property values should not be modified

Ensure ORACLE\_HOME, JAVA\_HOME variable are set and their binaries are available in PATH variable before proceeding.

Login with OS user which was used to perform OBRH pre-requisite software installation (or has ownership on Oracle Weblogic home directory)

Ensure OBRH and OBAPI+OBRH Installation home and filestore path's maintained in installer.properties

And OBRH\_config.properties exists and user running the installer has read-write permissions.

### Installation Steps:

- From your terminal navigate to <OBAPI INSTALLER DIR>/

```
[devops@obdxwls OBDX_Installer]$ ls -la
total 36
drwxrwxrwx 7 devops devops 4096 Mar 13 05:46 .
drwxrwxrwx 4 1002 1012 81 Mar 12 10:35 ..
drwxrwxrwx 10 devops devops 4096 Mar 17 06:25 ExecInstances
-rwxrwxrwx 1 devops devops 0 Mar 12 09:44 __init__.py
drwxrwxrwx 6 devops devops 103 Mar 17 06:25 core
-rwxrwxrwx 1 devops devops 0 Mar 12 12:40 digx-dashboard.log
-rw-r--r-- 1 devops devops 5060 Mar 13 06:08 digx-entitlement-feed-data.log
-rw-r--r-- 1 devops devops 376 Mar 13 06:08 digx-feed-data-task.log
drwxrwxrwx 6 devops devops 112 Mar 12 11:03 framework
drwxrwxrwx 3 devops devops 18 Mar 12 09:44 installables
drwxr-xr-x 2 devops devops 97 Mar 13 05:46 logs
-rwxrwxrwx 1 devops devops 14180 Mar 12 18:39 runInstaller.py
```

- Enter the following command

```
python3.11 runInstaller.py
```

- [Installation Process](#)

## 3.1 Installation Process

The installation process involves selecting the product, installation flavor, and other required configurations.

### Note

- The **Back** button is available on every screen, allowing users to navigate one step back.
- The **Quit** option is present on every page, enabling users to terminate the installation.

- [Step 1: Selecting the Product](#)
- [Step 2: Selecting the Installation Flavour](#)
- [Step 3: Selecting the Installation Type](#)
- [Step 4: Selecting the Installation Version](#)
- [Step 5: Selecting the Component](#)
- [Step 6: Selecting the Installation Mode](#)
- [Step 7: Verification Screen](#)
- [Step 8: Entering Required Credentials](#)
- [Step9: OBAPI Routing Hub screen appears](#)
- [Step10: Finalizing Installation](#)

### 3.1.1 Step 1: Selecting the Product

You will be prompted to select one of the following products:

### Note

Select **OBDX+OBRH** if you do not have any OBMA product Installed. If you want to Install OBRH then please Install from OBMA products.


1. **OBDX**
2. **OBRH (Not Supported)**
3. **OBDX + OBRH**
4. **New Entity Creation (OBDX)**



### 3.1.2 Step 2: Selecting the Installation Flavour

Next, choose one of the three installation flavours:

1. **Oracle FLEXCUBE Universal Banking (OBPM)**
2. **Oracle FLEXCUBE Core Banking (FCORE)**
3. **Third Party System (THP)**

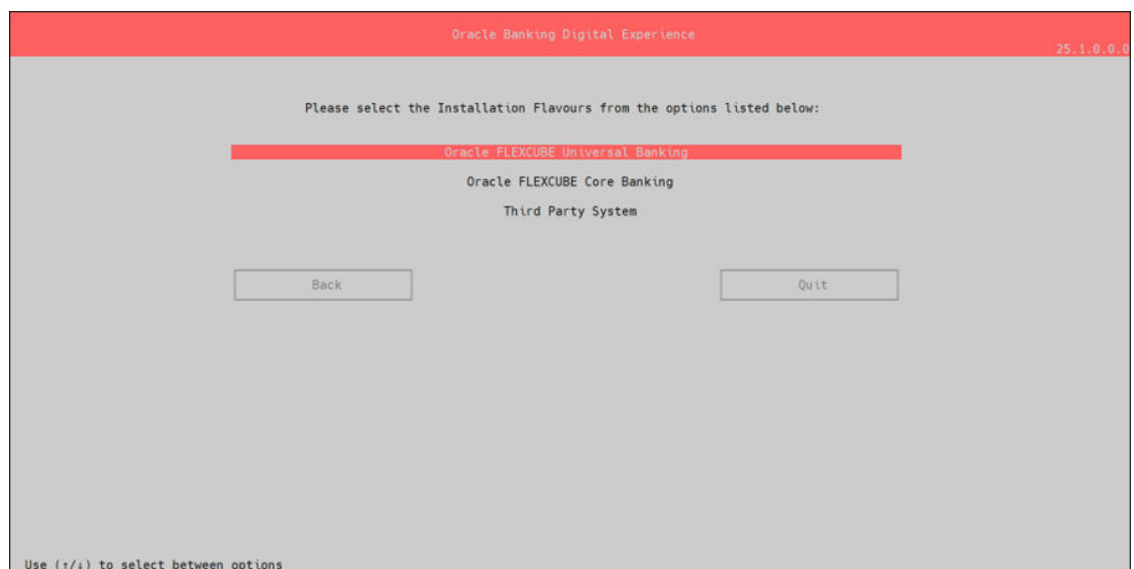

### 3.1.3 Step 3: Selecting the Installation Type

Select the **Installation Type** as:

- **Base** (for new installations)



If need to go 1 step back, need to select back. Else proceed with selecting Installation Flavour.



### 3.1.4 Step 4: Selecting the Installation Version

Choose the **Installation Version** as:

- **25.1.0.0.0** (in our case)



### 3.1.5 Step 5: Selecting the Component

You have three options to choose from:

1. **All** – Installs both **Database** and **Application**
2. **App** – Installs only the **Application**

### 3. Database – Installs only the Database



## 3.1.6 Step 6: Selecting the Installation Mode

Choose the appropriate installation mode:

1. **New Installation** – Use this option for a fresh installation of **DB** or **App**.
2. **Reinstall** – Use this option to delete the existing component and reinstall it.

In-case of an existing OBDX installation that you want to overwrite OR in case of a previously failed installation user can opt for this option.

#### Pre-requisites

- Weblogic domain processes should be down (i.e. AdminServer, NodeManager, Managed Servers, Derby etc)
- No open session (user should not be logged-in) with OBDX database schema (and OBDX EHMS schema in-case of OBDX UBS;OBPM and FCORE flavor).

Over-write the policies files (Day0Policy.csv; Entitlement.csv; Resources.csv and Task.csv) from OBDX Product zip into <OBDX INSTALLER DIR>/installables/policies directory

#### Key pointers

- OBDX schema (and OBDX EHMS schema in-case of OBDX UBS flavor) would be dropped and recreated (as per installer.properties). Tablespace would be re-used.
- Weblogic domain (as per installer.properties) would be deleted and created again.
- Installation Home would be cleaned up (all files/ sub-directories would be deleted) and re-created again.

#### Note

All input screens are similar to new installation option and as per the host system opted.




### 3.1.7 Step 7: Verification Screen

At this step, verify the selected configurations:

- **Product**
- **Flavour**
- **Installation Type**
- **Installation Version**
- **Installation Component**
- **Installation Mode**

If everything is correct, proceed by selecting **Confirm**. If there are any mismatches, select **Back** and correct the selections.

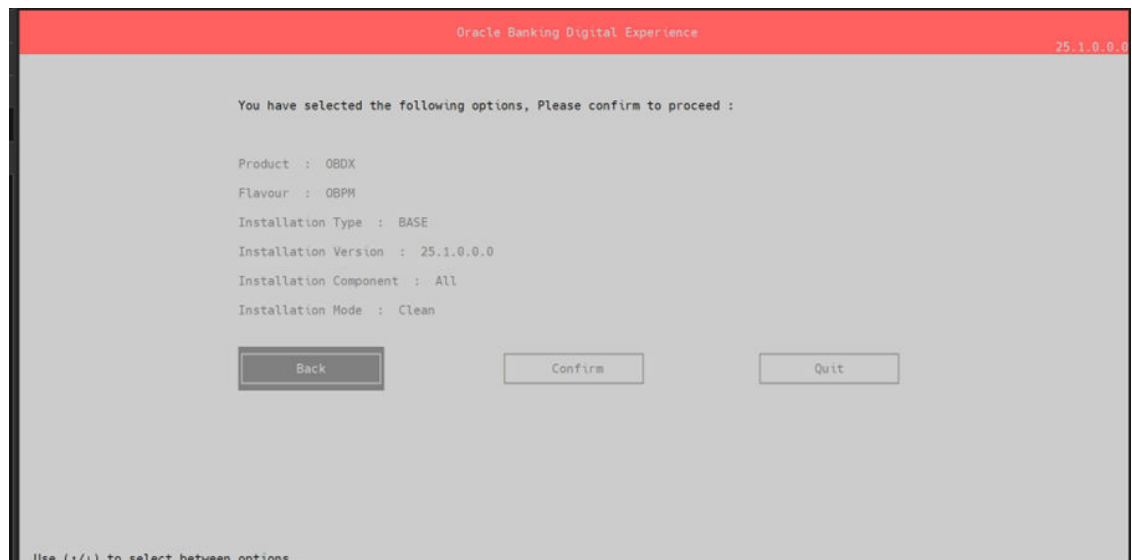

### 3.1.8 Step 8: Entering Required Credentials

You will be prompted to enter the following passwords during installation:

**FOR OBPM:**

1. **New SYS Password** for the **Database**
2. **New Schema Password** (For Schema Name mentioned in the property file)
3. **Existing SYS Password** for the **Database**
4. **Existing Database Schema Password**
5. **New Schema Password for B1A1**
6. **WebLogic Password** (for WebLogic administration)
7. **Superadmin User Password**

Oracle Banking Digital Experience 25.1.0.0

Enter the password for the user with sys privileges 'sys' :

>>\*\*\*\*\*

Valid.

Enter password for the OBDX schema 'OBDX\_TEST' :

>>\*\*\*\*\*

Valid.

Enter the password for the user with sys privileges of OBPM database 'sys' :

>>\*\*\*\*\*

Valid.

Enter password for the OBPM schema 'COD144\_ITR' (Existing) :

>>\*\*\*\*\*

Valid.

Enter password for the OBPM schema 'B1A1\_OBDX\_TEST\_INS' (new) :

\_\_\_\_\_

Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

Valid.

Enter password for the OBPM schema 'B1A1\_OBDX\_TEST\_INS' (new) :

>>\*\*\*\*\*

Valid.

Enter password for the weblogic domain user id 'weblogic' :

>>\*\*\*\*\*

Valid.

Enter password for the Admin User 'superadmin' :

>>\*\*\*\*\*

Valid.

**FOR FCORE:**

1. **New SYS Password** for the **Database**
2. **New Schema Password** (For Schema Name mentioned in the property file)

3. Existing SYS Password for the Database
4. Existing Database Schema Password
5. New Schema Password for B1A1
6. WebLogic Password (for WebLogic administration)
7. Superadmin User Password

Oracle Banking Digital Experience 25.1.0.0.1

Enter the password for the user with sys privileges 'sys' :  
Valid.

Enter password for the OBDX schema 'OBDX\_FCR\_TEST\_SCHEMA' :  
Valid.

Enter the password for the user with sys privileges of FCR database 'sys' :  
Valid.

Enter password for the FCORE schema 'B1A1\_OBDXFCR\_TEST' (new) :  
Valid.


Enter password for the weblogic domain user id 'weblogic' :  
Valid.

Enter password for the Admin User 'superadmin' :  
Valid.

Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

#### FOR THP:

1. New SYS Password for the Database
2. New Schema Password (For Schema Name mentioned in the property file)
3. Superadmin User Password

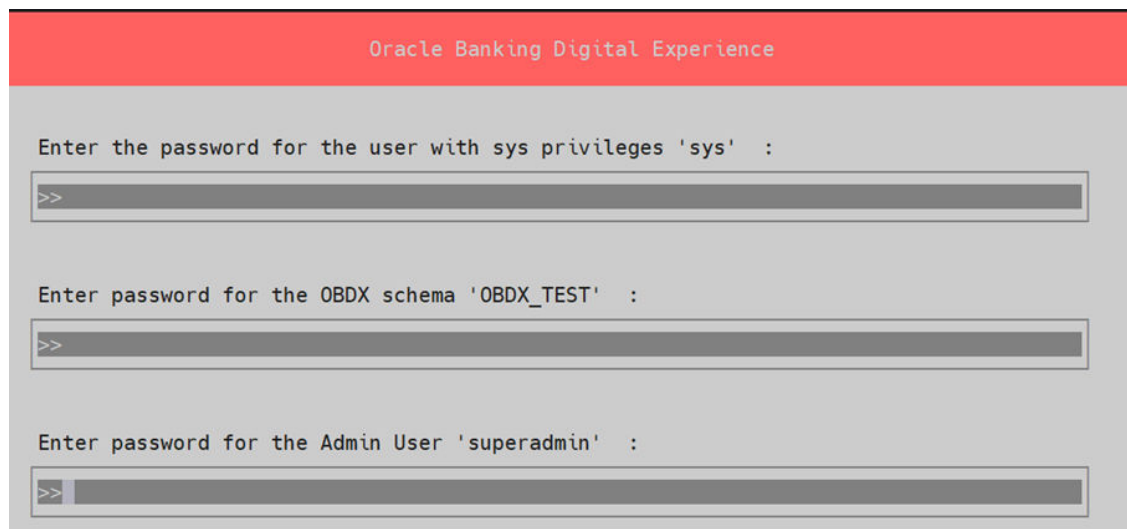

Oracle Banking Digital Experience

Enter the password for the user with sys privileges 'sys' :

>>

Enter password for the OBDX schema 'OBDX\_TEST' :


>>

Enter password for the Admin User 'superadmin' :

>>

### 3.1.9 Step9: OBAPI Routing Hub screen appears

In this screen, need to fill schema passwords and sys password details [THIS SCREEN WILL APPEAR ONLY WHEN SELECTING (OBAPI+OBRH) AS PRODUCT

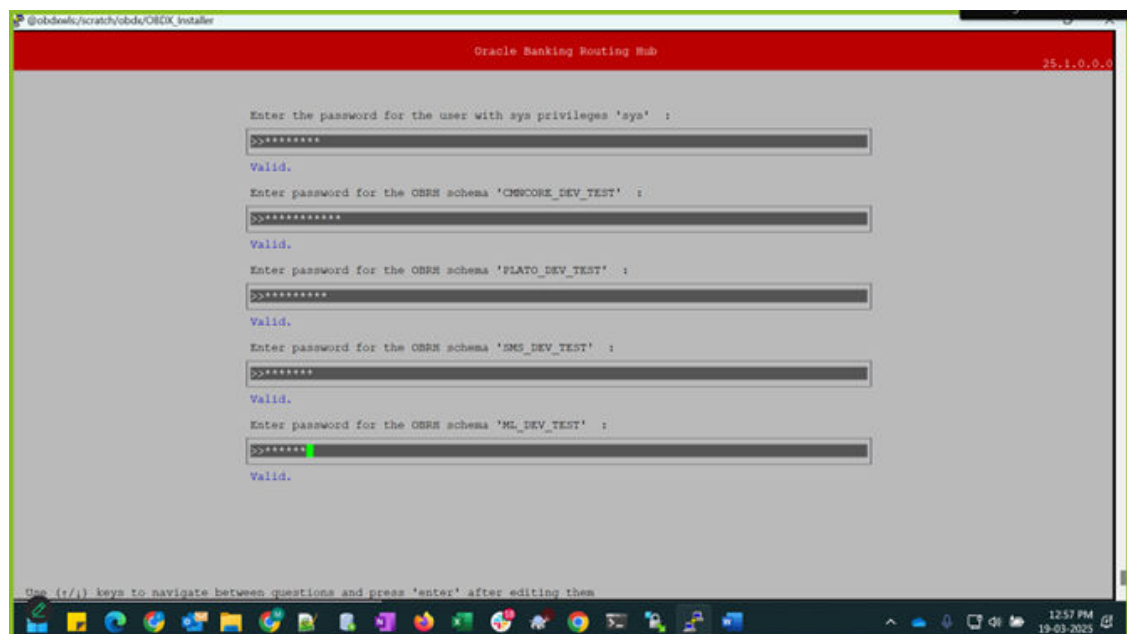

Oracle Banking Routing Hub 25.1.0.0.0

Enter the password for the user with sys privileges 'sys' :

>>\*\*\*\*\*

Valid.

Enter password for the OBRH schema 'CMSCORE\_DEV\_TEST' :

>>\*\*\*\*\*

Valid.

Enter password for the OBRH schema 'PLATO\_DEV\_TEST' :

>>\*\*\*\*\*

Valid.

Enter password for the OBRH schema 'SMS\_DEV\_TEST' :

>>\*\*\*\*\*

Valid.

Enter password for the OBRH schema 'ML\_DEV\_TEST' :

>>\*\*\*\*\*

Valid.

Use (r/j) keys to navigate between questions and press 'enter' after editing them

### 3.1.10 Step10: Finalizing Installation

After entering the required credentials, press **ENTER** to start the final installation process.

```
[devops@obdxwls OBDX_Installer]$ python3.11 runInstaller.py

Product           : OBDX
Flavour           : OBPM
Installation Type  : BASE
Installation Version : 25.1.0.0.0
Installation Component : Database
Installation Mode   : New
DB Execution Type  : CX_ORACLE

>>>> STARTING OBDX PRODUCT INSTALLATION <<<<

Tablespace with name OBDX0BRH_TESTING_NE and AUDIT_OBDX0BRH_TESTING_NE exists
Creating User...
```

# 4

## Installation using Silent Mode

This chapter describes how to run the OBAPI installer in silent mode.

### What is silent-mode installation?

During installation in silent mode, the installation program reads the details for your configuration parameters (flavor; mode; passwords etc) from the environment variables (same session in which installer is executed) and installer.properties that you set before beginning the installation. The installation program does not display any configuration options during the installation process.

Below values to be exported before running installer in silent mode.

```
export PRODUCT=" "  
export FLAVOUR=" "  
export INSTALLER_VERSION=""  
export Installation_Type=" "  
export COMPONENT=""  
export DB_SYS_PASSWORD=""  
export SCHEMA_PASS=""  
export DomainPassword=""  
export DBAuthPassword=""  
export EHMS_SCHEMA_PASS=""  
export EHMS_HOST_SCHEMA_NAME_PASS=" "  
export ENTITY_EHMS_DATABASE_HOSTNAME=" "  
export ENTITY_EHMS_DATABASE_PORT=""  
export ENTITY_EHMS_DATABASE_SID=" "  
export ENTITY_EHMS_DATABASE_SYS_USER=" "  
export ENTITY_EHMS_DATABASE_SYS_PASS=" "  
export ENTITY_SCHEMA_NAME=""  
export ENTITY_SCHEMA_PASS=" "  
export ENTITY_EHMS_HOST_SCHEMA_NAME=" "  
export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=" "
```

### Steps for Silent-Mode Installation

- Download and extract the installer zip file (Base – non localization version).



- – Navigate to <OBAPI INSTALLER DIR>/installables/OBAPI/BASE/25.1.0.0.0/core/config
- Open the **installer.properties** file to maintain key configurations for BASE ENTITY (obapi\_BU)

\*\*Refer to page 9 to 14 (step 4) for filling up installer.properties.

- Set the environment variables , as shown below

```
[devops@obdxwls OBDX_Installer]$ export JAVA_HOME=/scratch/app/java
[devops@obdxwls OBDX_Installer]$ export PRODUCT=OBDX
[devops@obdxwls OBDX_Installer]$ export FLAVOUR=OBPM
[devops@obdxwls OBDX_Installer]$ export INSTALLER_VERSION=25.1.0.0.0
[devops@obdxwls OBDX_Installer]$ export Installation_Type=BASE
[devops@obdxwls OBDX_Installer]$ export MODE=New
[devops@obdxwls OBDX_Installer]$ export COMPONENT=App
[devops@obdxwls OBDX_Installer]$ export DB_SYS_PASSWORD=*****
[devops@obdxwls OBDX_Installer]$ export SCHEMA_PASS=*****
[devops@obdxwls OBDX_Installer]$ export DomainPassword=*****
[devops@obdxwls OBDX_Installer]$ export DBAuthPassword=*****
[devops@obdxwls OBDX_Installer]$ export EHMS_DATABASE_SYS_PASS=*****
[devops@obdxwls OBDX_Installer]$ export EHMS_HOST_SCHEMA_NAME_PASS=*****
[devops@obdxwls OBDX_Installer]$ export EHMS_SCHEMA_PASS=*****
```

Below parameters should be set as environment variables, depending on the Host system the installer should be executed.

Host	Parameter	Description	Example
Environment variables to set for flavor:UBSFCORE	FLAVOUR	Flavour for installation  UBS for Oracle FLEXCUBE Universal Banking 14.6.0.0.0 (OBAPI with UBS)  FCORE for Oracle FLEXCUBE Core Banking 11.8.0.0.0 (OBAPI with FCORE)	export FLAVOUR=OBPM  or  export FLAVOUR=FCORE
	JAVA_HOME	Path for Java	export JAVA_HOME=/scratch/app/java
	PRODUCT	Need to select Product as OBAPI/OBRH/ OBAPI+OBRH	export PRODUCT=OBAPI
	INSTALLER_VERSION	Specify Installer Version	export INSTALLER_VERSION=25.1.0.0.0

Host	Parameter	Description	Example
	<b>Installation_Type</b>	Specify Type of Installer	<b>export Installation_Type=BAS E</b>
	<b>MODE</b>	Mode of installation.  <b>New</b> in-case of a fresh installation of OBAPI for the first run on server  <b>Clean</b> in-case of an existing OBAPI installation that you want to overwrite OR in case of a previously failed installation or re-installation	<b>export MODE=New</b>  <b>or</b> <b>export MODE=Clean</b>
	<b>COMPONENT</b>	Need to specify : App: When only App need to be Installed  Database: When only Database needs to be Installed  All: When both Database and App needs to be installed	<b>export COMPONENT=App</b>
	<b>DB_SYS_PASSWORD</b>	Sys user password of OBAPI database (Existing)	<b>export DB_SYS_PASSWORD=obapi182sys</b>
	<b>SCHEMA_PASS</b>	Password for new schema on OBAPI database	<b>export SCHEMA_PASS=obapi#182</b>
	<b>DomainPassword</b>	Password for Weblogic Administrator console	<b>export DomainPassword=wlsadmn</b>
	<b>EHMS_DATABASE_SY S_PASS</b>	Sys user password of EHMS HOST database (Existing)	<b>export EHMS_DATABASE_SY S_PASS=obapiehmssy s</b>
	<b>EHMS_HOST_SCHEMA _NAME_PASS</b> ** Only required for UBS & OBPM Host. Ignore this parameter in-case of FCORE Host	Password of existing EHMS HOST schema (Existing)	<b>export EHMS_HOST_SCHEMA _NAME_PASS =obapiehmshost</b>
	<b>EHMS_SCHEMA_PASS</b> <b>EHMS_SCHEMA_PASS</b>		Password for new OBAPI EHMS schema on EHMS HOST database

Host	Parameter	Description	Example
Environment variables to set for flavor:  OBAPI (Third-party HOST)	<b>DBAuthPassword</b>	Password for new OBAPI Administrator user of OBAPI application (In-case of OUD as provider, password should similar to one used while user creation in OUD(or User Password field))	<b>export DBAuthPassword=obapiadm</b>
	<b>JAVA_HOME</b>	Path for Java	<b>export JAVA_HOME=/scratch/app/java</b>
	<b>PRODUCT</b>	Need to select Product as OBAPI/OBRH/OBAPI+OBRH	<b>export PRODUCT=OBAPI</b>
	<b>FLAVOUR</b>	Flavour for installation 'OBAPI' for Third Party System 1.0 (OBAPI with THP)	<b>export FLAVOUR=OBAPI</b>
	<b>INSTALLER_VERSION</b>	Specify Installer Version	<b>export INSTALLER_VERSION=25.1.0.0.0</b>
	<b>Installation_Type</b>	Specify Type of Installer	<b>export Installation_Type=BAS E</b>
	<b>Mode</b>	Mode of installation.  <b>New</b> in-case of a fresh installation of OBAPI for the first run on server  <b>'Clean'</b> in-case of an existing OBAPI installation that you want to overwrite OR in case of a previously failed installation or re-installation	<b>export MODE=New</b>  <b>or</b> <b>export MODE=Clean</b>
	<b>COMPONENT</b>	Need to specify : App: When only App need to be Installed  Database: When only Database needs to be Installed  All: When both Database and App needs to be installed	<b>export COMPONENT=App</b>
	<b>DB_SYS_PASSWORD</b>	Sys user password of OBAPI database (Existing)	<b>export DB_SYS_PASSWORD=obapi182sys</b>
	<b>SCHEMA_PASS</b>	Password for new schema on OBAPI database	<b>export SCHEMA_PASS=obapi#182</b>

Host	Parameter	Description	Example
	<b>DomainPassword</b>	Password for Weblogic Administrator console	<b>export DomainPassword=wlsadmn</b>
	<b>wars_to_deploy</b>	Mention the optional wars to deployed	<b>export wars_to_deploy=digx-cms.war,digx-corporateloan.war,digx-payments.war</b>
	<b>DBAuthPassword</b>	Password for new OBAPI Administrator user of OBAPI application (In-case of OUD as provider, password should similar to one used while user creation in OUD(or User Password field))	<b>export DBAuthPassword=oba piadmn</b>

Run the runInstaller.py file with '--silent' argument along with '--base' option.

```

Execute Program
[devops@obdxwls OBDX_Installer]$ python3.11 runInstaller.py --silent

```

### Installation Status

The status is displayed on the terminal to indicate the progress of the installation.

If DB\_EXECUTION\_TYPE set to **FLYWAY**

```

[devops@obdxwls OBDX_Installer]$ python3.11 runInstaller.py

Product           : OBDX
Flavour           : OBPM
Installation Type  : BASE
Installation Version : 25.1.0.0.0
Installation Component : Database
Installation Mode   : New
DB Execution Type  : FLYWAY

>>>> STARTING OBDX PRODUCT INSTALLATION <<<<

Creating Tablespace...
Tablespace Created
Creating User...

```

If DB\_EXECUTION\_TYPE set to **CX\_ORACLE**

When the installation completes, the below message is displayed

```
[devops@obdxwls OBDX_Installer]$ python3.11 runInstaller.py

Product           : OBDX
Flavour           : OBPM
Installation Type  : BASE
Installation Version : 25.1.0.0.0
Installation Component : Database
Installation Mode   : New
DB Execution Type  : CX_ORACLE

>>>> STARTING OBDX PRODUCT INSTALLATION <<<<

Tablespace with name OBDXOBRH_TESTING_NE and AUDIT_OBDXOBRH_TESTING_NE exists
Creating User...
```

When the installation completes, the below message is displayed

```
Starting Flyway execution for User : SMS_DEV_TEST
Please wait....it may take some time...
Flyway executed successfully for User : SMS_DEV_TEST.

Starting Flyway execution for User : ML_DEV_TEST
Please wait....it may take some time...
Flyway executed successfully for User : ML_DEV_TEST.
Starting Gradle Build Creation please wait for some time ....
Gradle Build Created Successfully
Starting Weblogic Domain Creation...

Starting WEBLOGIC Setup and Configuration...
Weblogic Domain Created Successfully
Starting Datasource Creation...
Datasource created Successfully
Starting JMS Creation...
JMS created Successfully
Starting Deployment creation...
Deployment created Successfully

Successfully Setup and Configured WEBLOGIC...

>>>> OBDX PRODUCT INSTALLATION COMPLETED SUCCESSFULLY <<<<

<<<<< PLEASE CHECK THE LOG FILES AVAILABLE AT ExecInstances/19Mar1621/logs FOR ANY ERROR >>>>>>
```

# 5

## Installer Verification

Each execution creates a new directory as <DDMonthHHMM> under <OBAPI INSTALLER DIR>/ExecInstances directory where installer execution logs as described below are stored.

Log Description	PATH
Summarized Installer Activity Log	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/OBAPI_installer.log
Summarized Database Logs	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/DB_installation.log
Detailed OBAPI DB Logs per SQL file	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/OBAPI/OBAPI.log
Detailed EHMS schema Logs per SQL file (specific to EHMS host system only)	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/<EHMSHOST>/<EHMSHOST>.log <EHMSHOST> - values such as; FCORE; OBPM;
Weblogic Configuration Logs	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/app/app_debug.log <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/app/domain.log <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/app/datasource.log <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/app/jms.log <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/app/deployment.log
Detailed OBAPI policy seeding logs	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/Entitlement.log <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/Task.log <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/Dashboard_seed.log

### Note

Check for SEVERE keyword; If found refer to Troubleshoot section to re-run the policy

Policy seeding execution Log	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/seedPolicies.log
------------------------------	---

### Note

Should be empty if no errors during policy execution. In-case non-empty refer to Troubleshoot section to re-run the policy

---

Log Description	PATH
OBRH DB LOGS (When Product is selected as OBRH or OBAPI+OBRH)	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db/OBRH
OBRH APP LOGS (When Product is selected as OBRH or OBAPI+OBRH)	<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/app

---

Check all the logs for any errors.

# 6

## Installer Scope

OBAPI Installer currently covers below activities:

Flavor: Third Party system (OBAPI with THP)

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
OBAPI with THP	OBAPI DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
		Policy Seeding	✓	✓
	Weblogic Setup and Configuration	Create and Configure AdminServer, Machine, Managed Server and Cluster	✓	✓
		Configure NodeManager	✓	✓
		Configure JDBC	✓	✓
		JMS servers, Persistent stores and JMS Modules	✓	✓
		Application Deployment	✓	✓
		JTA	✓	✓
		Enable Production Mode	✓	✓
		Start AdminServer and NodeManager	✓	✓
	OBAPI Configuration	Copy config files into OBAPI Installation Home	✓	✓ (Delete old and copy new from installer zip)

Flavor: Oracle FLEXCUBE Core Banking (OBAPI with FCORE)

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
OBAPI with THP	OBAPI DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓



Flavor	Activity	Detailed Activity List	New Installation	Reinstall
	EHMS DB Setup	Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
		Policy Seeding	✓	✓
		Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
	Weblogic Setup and Configuration	Create and Configure AdminServer, Machine, Managed Server and Cluster	✓	✓
		Configure NodeManager	✓	✓
		Configure JDBC	✓	✓
		JMS servers, Persistent stores and JMS Modules	✓	✓
		Application Deployment	✓	✓
		JTA	✓	✓
		Enable Production Mode	✓	✓
		Start AdminServer and NodeManager	✓	✓
	OBAPI Configuration	Copy config files into OBAPI Installation Home	✓	✓ (Delete old and copy new from installer zip)

Flavor: Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBAPI with OBPM)

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
<b>OBAPI with OBPM (14.6.0.0.0 version)</b>	OBAPI DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Execute OBPM HOST specific scripts	✓	✓
		Compile Schema	✓	✓
		Policy Seeding	✓	✓

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
	EHMS DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
	Weblogic Setup and Configuration	Create and Configure AdminServer, Machine, Managed Server and Cluster	✓	✓
		Configure NodeManager	✓	✓
		Configure JDBC	✓	✓
		JMS servers, Persistent stores and JMS Modules	✓	✓
		Application Deployment	✓	✓
		JTA	✓	✓
		Enable Production Mode	✓	✓
		Start AdminServer and NodeManager	✓	✓
	OBAPI Configuration	Copy config files into OBAPI Installation Home	✓	✓ (Delete old and copy new from installer zip)

OBAPI+OBRH Installer currently covers below activities:

#### Flavor: Third Party system (OBAPI+OBRH with THP)

Detailed Activity List

New Installation

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
<b>OBAPI+OBRH with THP</b>	OBAPI+OBRH DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
		Policy Seeding	✓	✓

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
	Weblogic Setup and Configuration	Create and Configure AdminServer, Machine, Managed Server and Cluster	✓	✓
		Configure NodeManager	✓	✓
		Configure JDBC	✓	✓
		JMS servers, Persistent stores and JMS Modules	✓	✓
		Application Deployment	✓	✓
		JTA	✓	✓
		Enable Production Mode	✓	✓
		Start AdminServer and NodeManager	✓	✓
	OBAPI+OBRH Configuration	Copy config files into OBAPI+OBRH Installation Home	✓	✓ (Delete old and copy new from installer zip)

#### Flavor: Oracle FLEXCUBE Core Banking (OBAPI with FCORE)

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
<b>OBAPI+OBRH with FCORE</b>	OBAPI+OBRH DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
		Policy Seeding	✓	✓
	EHMS DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
	Weblogic Setup and Configuration	Create and Configure AdminServer, Machine, Managed Server and Cluster	✓	✓
		Configure NodeManager	✓	✓
		Configure JDBC	✓	✓

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
		JMS servers, Persistent stores and JMS Modules	✓	✓
		Application Deployment	✓	✓
		JTA	✓	✓
		Enable Production Mode	✓	✓
		Start AdminServer and NodeManager	✓	✓
	OBAPI+OBRH Configuration	Copy config files into OBAPI+OBRH Installation Home	✓	✓ (Delete old and copy new from installer zip)

**Flavor: Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBAPI+OBRH with OBPM)**

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
<b>OBAPI+OBRH with OBPM (14.6.0.0.0 version)</b>	OBAPI+OBRH DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Execute OBPM HOST specific scripts	✓	✓
		Compile Schema	✓	✓
		Policy Seeding	✓	✓
	EHMS DB Setup	Create Tablespace	✓	NA
		Create Schema and Role	✓	✓ (drop and re-create objects)
		Grants	✓	✓
		Load DB object (DDL's and DML's)	✓	✓
		Compile Schema	✓	✓
	Weblogic Setup and Configuration	Create and Configure AdminServer, Machine, Managed Server and Cluster	✓	✓
		Configure NodeManager	✓	✓
		Configure JDBC	✓	✓
		JMS servers, Persistent stores and JMS Modules	✓	✓

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
		Application Deployment	✓	✓
		JTA	✓	✓
		Enable Production Mode	✓	✓
		Start AdminServer and NodeManager	✓	✓
	OBAPI+OBRH Configuration	Copy config files into OBAPI+OBRH Installation Home	✓	✓ (Delete old and copy new from installer zip)

# Post Installation Steps

## Credential Store Mapping

The OBAPI system utilizes external integrations to facilitate seamless communication with various services. To establish these connections, credentials are required to authenticate and authorize access. These credentials are not hardcoded but rather initialized post-installation. They are subsequently encrypted and stored within the database, ensuring confidentiality and integrity. Upon application startup, the credentials undergo decryption, enabling secure loading into the system. This subsequent section outlines the procedures and guidelines for configuring and managing these credentials within the OBAPI environment.

To configure and add credentials follow the steps mentioned in the below document

- **Oracle Banking APIs Credential Store Setup Guide**

## Fileupload with UBS

Refer below document for File upload configuration with UBS

- **Oracle Banking APIs File Upload Report Configuration**

## Origination with OBO

Refer below document (section 5 and 6) for enabling Origination with OBO

- **Oracle Banking APIs OBO Mid-Office and Third Party Setup and Configuration Guide**

## Trade Finance (LC and BG) with OBTFPM

Refer below document for enabling **Letter Of Credit** issuance and **Bank Guarantee** issuance with Oracle Banking Trade Finance Management.

Oracle Banking Mid-Office Product Setup and Configuration Guide

## OHS

OHS server needs to be configured for all FLAVOR's as a mandatory activity.

To configure OHS server follow steps mentioned in below document before proceeding further.

- **Oracle Banking APIs OHS User Interface Configuration** user manual.

## Feedback module:

In order to enable Scale (Rating) icons please refer the section **Creating Procedure of Oracle Banking APIs Content Upload Guide** user manual.

**Table 7-1 WAR deployments**

Sr No	Module	Mandatory (Y/N)
<b>Domainwise deployments</b>		
2	digx-common	Y
4	digx-infra	Y
5	digx-coherence	Y

**Table 7-1 (Cont.) WAR deployments**

Sr No	Module	Mandatory (Y/N)
8	digx-extxfacesimulator	Y
9	digx-cms	N
10	digx-corporateloan	N
11	digx-creditfacility	N
12	digx-edx	N
14	digx-liquiditymanagement	N
16	digx-payments	N
17	digx-pfm	N
19	digx-processmanagement	N
20	digx-retail	N
21	digx-scf	N
22	digx-scfcm	N
23	digx-tradefinance	N
24	digx-virtual-account	N
25	digx-genai	Y
26	digx-ml-lndb	Y
27	digx-sms	Y
28	digx-ukob	Y
29	digx-webauthn	Y
30	weblogic-remote-cconsole-app	Y

## Enabling Kafka in OBAPI

### Overview

OBAPI now supports Apache Kafka as a messaging system in addition to JMS. Kafka provides high throughput, scalability, and fault tolerance, making it an excellent choice for event-driven architectures. OBAPI will work with either JMS or Kafka but not both simultaneously. This section explains how to enable Kafka.

#### 1. Enable Kafka

- JMS is the default messaging system in OBAPI.
- Enable Kafka only if you want to switch the existing message system to Kafka by executing the following configuration queries in the database. If not enabled, the system will continue using JMS.

Configuration Queries:

```
UPDATE DIGX_FW_CONFIG_ALL_B SET prop_value = 'KAFKA' WHERE prop_id = 'MESSAGE_BROKER_TYPE';
```

```
UPDATE DIGX_FW_CONFIG_ALL_B SET prop_value = '{HOSTIP}:{HOSTPORT}' WHERE prop_id = 'bootstrap.servers';
```

Replace {HOSTIP}:{HOSTPORT} with the IP address and port of the Kafka broker running the Kafka service.

**Note**

Ensure that Kafka is properly installed before making this change.

If you want to migrate the existing messaging system to Kafka, you need to implement Kafka consumer and producer equivalents for all the customized JMS queues and topics. Also, If there are any new customized Kafka topics to be created, the corresponding producer and consumer implementations must be developed. Refer to **Section: Messaging System Integration for OBAPI** in the document **Oracle Banking APIs Extensibility Guide** for the detailed steps and guidelines in implementing Kafka and JMS.

- OBAPI Pre-defined External Kafka Topic Configurations

OBAPI listens to the following external Topics of OBVAM(Oracle Banking Virtual Account Management), OBLM(Oracle Banking Liquidity Management) and OBO(Oracle Banking Origination).

- lm.accountnotification
- vam.virtualaccountnotification
- vam.accountstatusnotification
- vac.accountfacilitynotification
- externalSystemAlertMessage

For these Topics, the following properties need to be updated in the table DIGX\_FW\_CONFIG\_ALL\_B. Details should be obtained from the respective HOST system. If the HOST does not support the SSL property, it should be removed.

```
PROP_ID
CATEGORY_ID
PROP_VALUE
    <topic_name>@ssl.truststore.password
KAFKA_CONFIG
<truststore_password>
    <topic_name>@ssl.jaas.config
KAFKA_CONFIG org.apache.kafka.common.security.scram.ScramLogin
Module required
    username="<jaas_username>" password="<jaas_password>";
    <topic_name>@bootstrap.servers
KAFKA_CONFIG
<host_ip>:<host_port>
    <topic_name>@ssl.truststore.location
KAFKA_CONFIG
<truststore_location>
    <topic_name>@security.protocol
KAFKA_CONFIG
<security_protocol>
    <topic_name>@ssl.mechanism KAFKA_CONFIG <sasl_mechanism>
```



# 8

## OBAPI Logging Configuration

### Logging Level Configuration with SLF4J & Logback in Weblogic

Logging at package and class levels can be externalized/customized by maintaining a common logback file outside the application for all the wars. This file will be configured as a server start argument.

1. Use the attached sample reference file and copy it to any physical path. (For example, /scratch/obapi/domains/obapi\_domain/logbackOverride.xml)

```
<configuration scan="true"
    scanPeriod="10 minutes">

    <appender name="STDOUT"
        class="ch.qos.logback.core.ConsoleAppender">
<!-- encoders are assigned the type
ch.qos.logback.classic.encoder.PatternLayoutEncoder by
default -->
    <encoder>
<pattern>%date{dd MMM yyyy;HH:mm:ss.SSS} [%thread] %X{ecid}
    %-5level %logger{100}[%X{FILE_IDENTIFIER} %X{FILE_REF_ID}] -
    %msg%n</pattern>          </encoder>
    </appender>
    <!-- <logger name="com.ofss.digx.app.sms.service.user.login"
        level="info"/> <logger
name="com.ofss.digx.app.sms.service.user.User" level="debug"/>
    -->
    <root level="ERROR">
<appender-ref ref="STDOUT" />
    </root>
</configuration>
```

2. Configure the same above path in server start arguments as follows.  
-Dlogback.configurationFile=/scratch/obapi/domains/obapi\_domain/  
logbackOverride.xml

### Enable package and class level logging :

If you want to change the logging level of a particular class or a package, you can do so by adding the following snippet in the external logback file and taking managed server restart. (Refer to the sample file)

- a. To configure package logging level:  
<logger name="com.ofss.digx.app.sms.service.user.login" level="info"/>
- b. To configure class logging level :  
<logger name="com.ofss.digx.app.sms.service.user.User" level="debug"/>

**Note**

In order to get the changes reflected without server restart, you can add a "scan" attribute to the <configuration> element in the external logback file. By default, the configuration file will be scanned for changes once every minute. To configure your desired scan period, add the attribute "scanPeriod" with value in milliseconds, seconds, minutes, or hours.

For example,

```
<configuration scan="true" scanPeriod="2 minutes">
```

This will scan for the configuration file every 2 minutes for any changes.

**Redirecting stdout and stderr logs into a log file :**

To redirect standard out and error logs to a log file, please follow the below steps.

Login to Weblogic console → Take Lock & Edit session → Go to Servers inside Environment menu à

Click on the managed server → Go to Logging tab → Advanced → Check the boxes "Redirect stdout logging enabled" and "Redirect stderr logging enabled" as shown below.

<b>Platform Logger Levels:</b> 	Specifies the platform logger and the associated level names set through the WebLogic Server configuration. <a href="#">More Info...</a>
<input checked="" type="checkbox"/>  <b>Redirect stdout logging enabled</b>	Specifies whether the stdout of the JVM in which a WebLogic Server instance runs is redirected to the WebLogic logging system. When this attribute is enabled, the stdout content is published to all the registered log destinations, such as the server terminal console and log file. <a href="#">More Info...</a>
<input checked="" type="checkbox"/>  <b>Redirect stderr logging enabled</b>	Specifies whether the stderr of the JVM in which a WebLogic Server instance runs is redirected to the WebLogic Logging system. When this attribute is enabled, the stderr content is published to all the registered log destinations, such as the server terminal console and log file. <a href="#">More Info...</a>
<input checked="" type="checkbox"/> <b>Log monitoring enabled</b>	Enable or disable log monitoring. <a href="#">More Info...</a>

# 9

## OBAPI Product Verification

Start managed server and verify all deployed applications are in Active state (as shown below).

Weblogic login URL has been changed from “http://<IP Address>/console” to “http://<IP Address>/rconsole”

To make these changes, Please follow below Documentation:

[https://docs.oracle.com/en/middleware/fusion-middleware/weblogic-remote-console/administer/set-console.html#GUID-34B825B0-644B\[...\]3-9F50-7745E20D830B](https://docs.oracle.com/en/middleware/fusion-middleware/weblogic-remote-console/administer/set-console.html#GUID-34B825B0-644B[...]3-9F50-7745E20D830B)

Deployment wars status

Start managed server and verify all deployed applications are in Active state (as shown below).

Domainwise deployment wars status

Monitoring Tree ( This Server )

Application Management

This page displays the list of Java EE applications and standalone application modules installed in this domain. Use it to start and stop an application, view the application's intended and current state, and to manage the application's deployment plan.

Modules in the application can have one of the following states:

- Unprepared - Indicates that none of the modules in this application are currently prepared or active.

Start Stop Update/Redeploy Create Plan

Name	State	Application Name	Application Version
<input type="checkbox"/> digx-cms	Active	digx-cms	
<input type="checkbox"/> digx-coherence	Active	digx-coherence	
<input type="checkbox"/> digx-common	Active	digx-common	
<input type="checkbox"/> digx-corporateloan	Active	digx-corporateloan	
<input type="checkbox"/> digx-creditfacility	Active	digx-creditfacility	
<input type="checkbox"/> digx-edx	Active	digx-edx	
<input type="checkbox"/> digx-em	Active	digx-em	
<input type="checkbox"/> digx-extxfacesimulator	Active	digx-extxfacesimulator	

**Monitoring Tree ( This Server )**

Home

Application Management

Customize Table New Dashboard

This page displays the list of Java EE applications and standalone application modules installed in this domain. Use it to start and stop an application, view the application's intended and current state, and to manage the application's deployment plan.

Modules in the application can have one of the following states:

- Unprepared - Indicates that none of the modules in this application are currently prepared or active.

Start Stop Update/Redeploy Create Plan

Name	State	Application Name	Application Version
<input type="checkbox"/> digx-scf	Active	digx-scf	
<input type="checkbox"/> digx-scfcm	Active	digx-scfcm	
<input type="checkbox"/> digx-sms	Active	digx-sms	
<input type="checkbox"/> digx-tradefinance	Active	digx-tradefinance	
<input type="checkbox"/> digx-ukob	Active	digx-ukob	
<input type="checkbox"/> digx-virtual-account	Active	digx-virtual-account	
<input type="checkbox"/> digx-webauthn	Active	digx-webauthn	
<input type="checkbox"/> weblogic-remote-console-app	Active	weblogic-remote-console-app	

Total Rows: 30

**Monitoring Tree ( This Server )**

Home

Application Management

Customize Table New Dashboard

This page displays the list of Java EE applications and standalone application modules installed in this domain. Use it to start and stop an application, view the application's intended and current state, and to manage the application's deployment plan.

Modules in the application can have one of the following states:

- Unprepared - Indicates that none of the modules in this application are currently prepared or active.

Start Stop Update/Redeploy Create Plan


Name	State	Application Name	Application Version
<input type="checkbox"/> digx-genai	Active	digx-genai	
<input type="checkbox"/> digx-infra	Active	digx-infra	
<input type="checkbox"/> digx-liquiditymanagement	Active	digx-liquiditymanagement	
<input type="checkbox"/> digx-ml-indb	Active	digx-ml-indb	
<input type="checkbox"/> digx-payments	Active	digx-payments	
<input type="checkbox"/> digx-pfm	Active	digx-pfm	
<input type="checkbox"/> digx-processmanagement	Active	digx-processmanagement	
<input type="checkbox"/> digx-retail	Active	digx-retail	

Total Rows: 30

To verify the installation, launch below URL

<http://<OHS server ip or hostname>:<OHS port>>

Check if the page loads successfully.

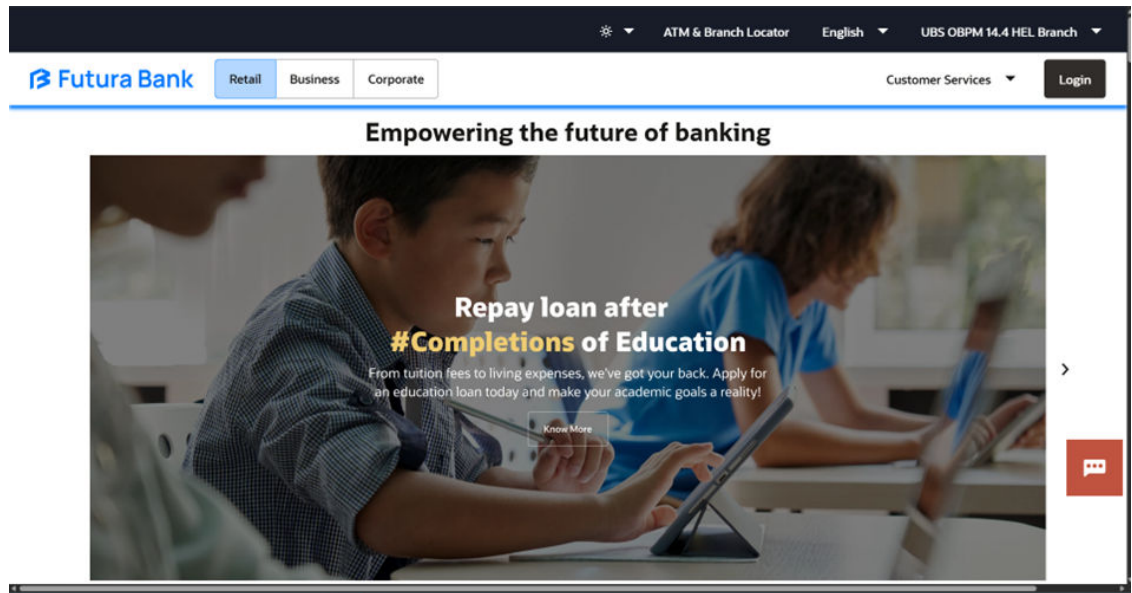

### Day1 Configuration

#### Universal Banking Solution (OBAPI with UBS)

Refer below document (Section 3. System Configuration) for Day1 configuration required for integration with UBS

Oracle Banking APIs System Configuration

Once day1 is completed, application is available for end-user transactions.

#### Note

Post Day1 restart of Managed server is mandatory

#### Third Party System (OBAPI with THP)

Refer below document (**Section 5. System Configuration – Host System as Third Party**) for Day1 configuration required for integration with Third-party System

Oracle Banking APIs System Configuration

Once day1 is completed, application is available for end-user transactions.

#### Note

Post Day1 restart of Managed server is mandatory

### Chat Bot Configuration:

Refer below document for Chat Bot configuration.

Oracle Banking APIs Chatbot Configuration

### Mobile Application Builder:

Refer below documents for Mobile Applications build and setup.

Oracle Banking Digital Experience Mobile Application Builder-Android

Oracle Banking Digital Experience Mobile Application Builder-iOS

### **Mid Office Configuration:**

Refer below document for Mid Office Configurations i.e. Trade Finance, Corporate Lending.

Oracle Banking Mid-Office Product Setup and Configuration Guide.

### **Account Uniqueness Configuration:**

Some core banking systems support same account number in multiple branches within the entity. OBAPI has support for such core banking systems. However, the configuration is not enabled by default. In case the Bank has core banking system which supports and provides same account numbers across multiple branches, the following scripts should be executed per entity for enabling the support.

```
Insert into DIGX_FW_CONFIG_ALL_O (PROP_ID, PREFERENCE_NAME, PROP_VALUE,
DETERMINANT_VALUE,
CREATED_BY, CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE)
values
('OBAPI.host.account.uniqueness', 'ExtSystemsConfig', 'BRANCH', '<ENTITY_ID>', 'of
ssuser', sysdate,
'ofssuser', sysdate);
Insert into DIGX_FW_CONFIG_ALL_O (PROP_ID, PREFERENCE_NAME, PROP_VALUE,
DETERMINANT_VALUE,
CREATED_BY, CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE)
values
('OBAPI.host.accountbranch.delimiter', 'ExtSystemsConfig', '@~', '<ENTITY_ID>', 'o
fssuser', sysdate, 'ofssuser', sysdate);
```

#### **Note**

Ensure that <ENTITY\_ID> has been replaced with correct Entity ID for the corresponding entity.

# 10

## Multi Entity

To add entity to existing OBAPI with supported host system follow below steps.

- Add entity through OBAPI Web application, using
  - User Manual Oracle Banking APIs System Configuration
- In case of OBTFPM integration, following document should be referred.
  - Oracle Banking Mid-Office Product Setup and Configuration Guide Running OBAPI installer

Ensure that Managed server should be down and Admin server should be running state.

Ensure `ORACLE_HOME`, `JAVA_HOME` variable are set and their binaries are available in `PATH` variable before proceeding.

Login with OS user which was used to perform OBAPI software installation (or has ownership on Oracle Weblogic home directory)


Ensure OBAPI installation details (OBAPI DB; WLS etc) are maintained in `installer.properties` and user running the installer has read-write permissions.

From your terminal navigate to `<OBAPI INSTALLER DIR>`




Enter the following command

```
python3 runInstaller.py
```

Select installation type as 'New Entity Creation'.

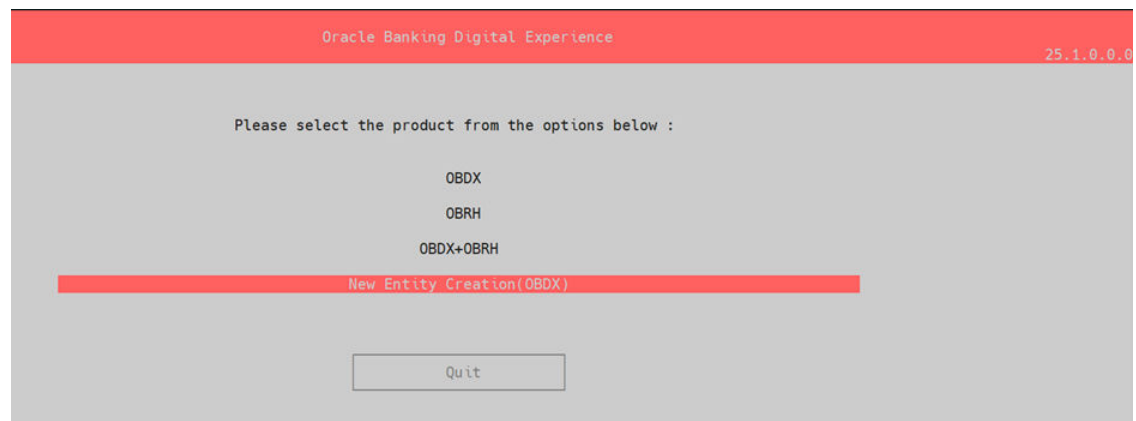

Below screen will appear after selecting add entity.

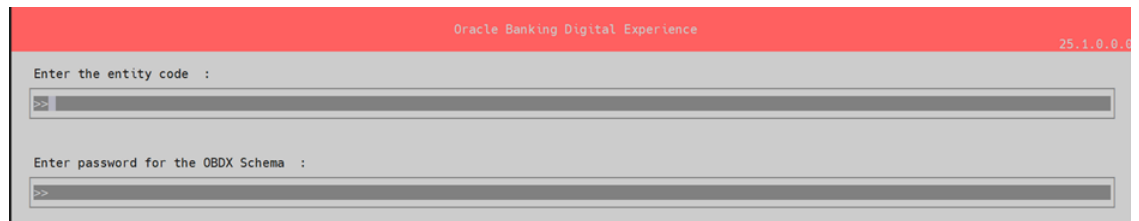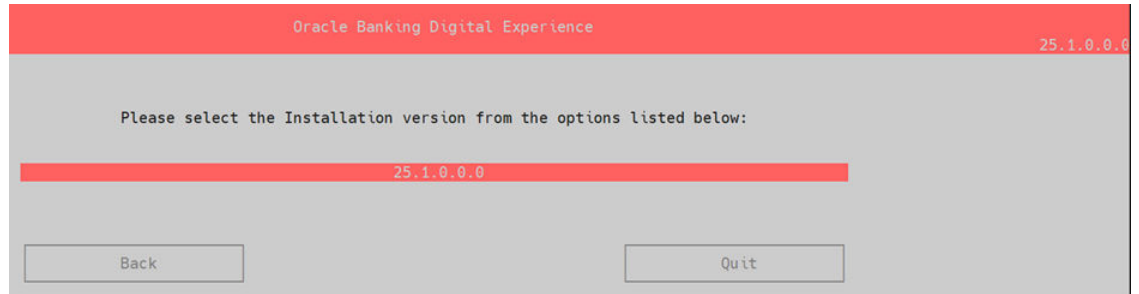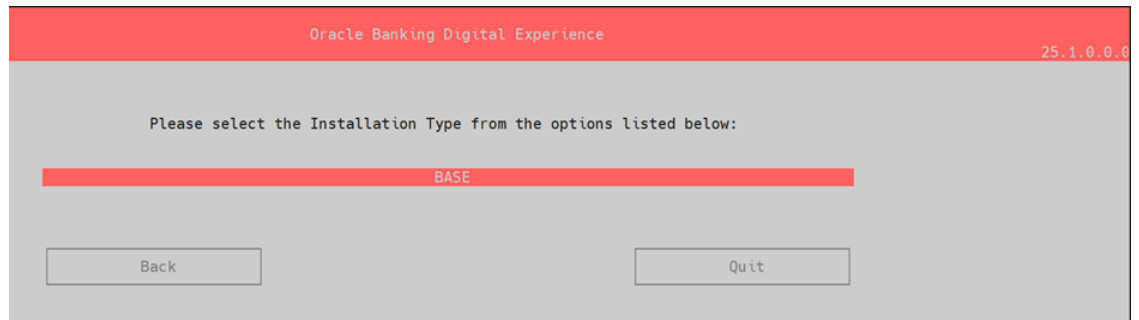

Enter below information:

- Entity code which has been added from screen
- OBAPI schema password

If an entity code belongs to UBS / OBPM host following screen (below screenshot are for OBPM ; for UBS same input are required) will appear:



Oracle Banking Digital Experience 25.1.0.0.0

>>100.76.179.24  
Valid.  
Enter the UBS DB port :  
>>1521  
Valid.  
Enter the UBS SID :  
>>ORPDS07.snbomprdbas1.qbuodint02bcm.oraclevcn.com  
Valid.  
Enter the Directory name for Tablespace creation (DBA DIRECTORIES) :  
>>TBS\_DIR  
Valid.  
Enter the username with 'sys' privileges :  
>>sys  
Valid.  
Enter password for the user with sys privileges :  
>>\*\*\*\*\*  
Valid.  
Enter existing weblogic admin password :  
>>\*\*\*\*\*  
Valid.  
Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

Oracle Banking Digital Experience 25.1.0.0.0

Enter the existing UBS host schema name :  
>>COD144\_ITR  
Valid.  
Enter the password for existing UBS host schema :  
>>\*\*\*\*\*  
Valid.  
Enter new UBS B1A1 schema name :  
>>ORBX\_BU2  
Valid.  
Enter new schema password :  
>>\*\*\*\*\*  
Valid.  
Enter country code :  
>>GB

Enter below details:

- Hostname of the database host server
- Port of the database host server
- Host database Service Name
- Oracle directory name in which you want the database datafile (dbf) to be created. Enter only the name NOT the path.
- Username with 'sys' privileges
- SYS privilege user password where UBS schema would be created
- Weblogic console administrator user password

```
devops@obdxwls OBDX_Installer]$ python3 runInstaller.py
>>>> STARTING OBDX PRODUCT INSTALLATION <<<<

Starting UBS Database Installation...
Creating Tablespace...
Tablespace Created
Creating User...
User Created
Creating Role...
Roles Created
Executing Grants...
Execution of table-scripts_main.sql started
Execution of table-scripts_main.sql completed
Execution of ubs_object_scripts_main.sql started
```

Enter below details:

- EXISTING Host schema name
- Password for EXISTING schema
- Complete EHMS (HostInterface) schema name you want installer to create as new schema
- Password for New schema
- Country Code of entity branch

### Installation Status in case of UBS / OBPM

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

```
devops@obdxwls OBDX_Installer]$ python3 runInstaller.py
>>>> STARTING OBDX PRODUCT INSTALLATION <<<<

Starting UBS Database Installation...
Creating Tablespace...
Tablespace Created
Creating User...
User Created
Creating Role...
Roles Created
Executing Grants...
Execution of table-scripts_main.sql started
Execution of table-scripts_main.sql completed
Execution of ubs_object_scripts_main.sql started
Execution of ubs_object_scripts_main.sql completed
Execution of execute-seeds_main.sql started
Execution of execute-seeds_main.sql completed
SUCCESSFULLY installed UBS database

Starting Entity Configuration
Calling WLST
Entity successfully configured.

<<<<< PLEASE CHECK THE LOG FILES AVAILABLE AT ExecInstances/21Mar0504/logs FOR ANY ERROR >>>>>>

devops@obdxwls OBDX_Installer]$
```

When the installation completes, the below message is displayed

```
Starting Entity Configuration
Calling WLST
Initializing WebLogic Scripting Tool (WLST) ...
Welcome to WebLogic Server Administration Scripting Shell
Type help() for help on available commands

Connecting to t3://100.76.133.230:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBDX211TEST".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Creating Data source OBDXBU2_B1A1
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
OBDXBU2_B1A1 created successfully.

Exiting WebLogic Scripting Tool.

Entity successfully configured.
```

Post successful installation refer to **Section 8: Post Installation steps** for manual steps to be performed for UBS additional entity (sub-section : **Oracle FLEXCUBE Universal Banking (OBAPI with UBS)**).

**No additional steps/ configuration are required.**

# Multi-entity installation using Silent Mode

This chapter describes how to run the OBAPI installer for add entity in silent mode.

Ensure that Managed server should be down and Admin server should be running.

Ensure ORACLE\_HOME, JAVA\_HOME variable are set and their binaries are available in PATH variable before proceeding.

Login with OS user which was used to perform OBAPI software installation (or has ownership on Oracle Weblogic home directory)

## Steps for Silent-Mode Installation

1. Set the environment variables, as shown below.

```
[obdxdevops@ofss-mum-5556 ~]$ export Installer_Version="25.1.0.0.0"
[obdxdevops@ofss-mum-5556 ~]$ export Installation_Type="BASE"
[obdxdevops@ofss-mum-5556 ~]$ export Entity_Code="*****"
[obdxdevops@ofss-mum-5556 ~]$ export SCHEMA_PASS="*****"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_DATABASE_HOSTNAME="100.76.179.24"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_DATABASE_PORT="1521"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_DATABASE_SID="OFPDB07.snbomprdbaas1.gbucdsint02bom.oraclevcn.com"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_DATABASE_SYS_USER="sys"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_DATABASE_SYS_PASS="*****"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_DBA_DIRECTORY_NAME="TBS DIR"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_SCHEMA_NAME="ENTITY_SCHEMA_TEST_SILENT"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_SCHEMA_PASS="*****"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_HOST_SCHEMA_NAME="COD144_ITR"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS="*****"
[obdxdevops@ofss-mum-5556 ~]$ export ENTITY_EHMS_CCY=GB
[obdxdevops@ofss-mum-5556 ~]$ export WLS_DOMAIN_PASS="*****"
[obdxdevops@ofss-mum-5556 ~]$ python3 runInstaller.py --silent --addEntity
```

Below parameters should be set in environment variables

Environment variables	Parameter	Description	Example
<b>Environment variables to set for flavor:</b> <b>FCORE UBS (14.6.0.0.0 release)</b> <b>OBPM (14.6.0.0.0 release)</b>	<b>Entity_Code</b>	Entity code which has been entered from screen	<b>export</b> <b>Entity_Code=OBDX_B</b> <b>U7</b>
	<b>SCHEMA_PASS</b>	Password for existing OBAPI schema	<b>export</b> <b>SCHEMA_PASS=devops</b> <b>#obapi182</b>
	<b>ENTITY_EHMS_DATABASE_HOSTNAME</b>	Hostname of the EHMS HOST database host server	<b>export</b> <b>ENTITY_EHMS_DATABASE_HOSTNAME=xx.xx.xx.xx</b>
	<b>ENTITY_EHMS_DATABASE_PORT</b>	Port of the EHMS HOST database host server	<b>export</b> <b>ENTITY_EHMS_DATABASE_PORT=1521</b>
	<b>ENTITY_EHMS_DATABASE_SID</b>	EHMS Host database Service Name	<b>export ENTITY_EHMS_DATABASE_SID=obdxdb.in.oracle.com</b>

Environment variables	Parameter	Description	Example
	<b>ENTITY_EHMS_DBA_DIRECTORY_NAME</b>	Oracle Directory name in which you want the EHMS (HostInterface) schema datafile (dbf). Enter only the name and NOT the path	<b>export</b> <b>ENTITY_EHMS_DBA_DIRECTORY_NAME=TBS_DIR</b>
	<b>ENTITY_EHMS_DATABASE_SYS_USER</b>	Username with 'sys' privileges	<b>export</b> <b>ENTITY_EHMS_DATABASE_SYS_USER=sys</b>
	<b>ENTITY_EHMS_DATABASE_SYS_PASS</b>	Password for EHMS sys user	<b>export</b> <b>ENTITY_EHMS_DATABASE_SYS_PASS=devops@sys</b>
	<b>ENTITY_EHMS_SCHEMA_NAME</b>	Complete EHMS (HostInterface) schema name you want installer to create as new schema.	<b>export</b> <b>ENTITY_EHMS_SCHEMA_NAME=OBAPIEHMS</b>
	<b>ENTITY_EHMS_SCHEMA_PASS</b>	Password for new EHMS schema on EHMS HOST database	<b>export</b> <b>ENTITY_EHMS_SCHEMA_PASS=devops#ehms</b>
	<b>ENTITY_EHMS_HOST_SCHEMA_NAME</b>	EXISTING EHMS Host schema name	<b>export</b> <b>ENTITY_EHMS_HOST_SCHEMA_NAME=EhmsHost</b>
	<b>ENTITY_EHMS_HOST_SCHEMA_NAME_PASS</b> **This parameter is only required for UBS & OBPM Host	Password of existing HOST EHMS schema (Existing)	<b>export</b> <b>ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=ehmshst</b>
	<b>WLS_DOMAIN_PASS</b>	Password for Weblogic admin console	<b>export</b> <b>WLS_DOMAIN_PASS=weblogic182</b>
	<b>ENTITY_EHMS_CCY</b> **This parameter is only required for UBS & OBPM Host	Country Code for new or additional entity home branch	<b>export</b> <b>ENTITY_EHMS_CCY=GB</b>
	<b>ENTITY_EHMS_FCORE_FCUBS_SCHEMA_NAME</b> **This parameter is only required for FCORE	FCORE-FCUBS HOST schema name	<b>export</b> <b>ENTITY_EHMS_FCORE_FCUBS_SCHEMA_NAME=FCRUBSHOST</b>
<b>Environment variables to set for flavor: OBAPI (Third-party HOST)</b>	<b>Entity_Code</b>	Entity code which has been entered from screen	<b>export</b> <b>Entity_Code=OBDBX_BU1</b>
	<b>SCHEMA_PASS</b>	Password for existing OBAPI schema	<b>export</b> <b>SCHEMA_PASS=welcomel</b>

2. Run the **runInstaller.py** file with '--silent' argument along with '--addEntity'.

```
[devops@ /]$
[devops@ /]$ export Entity_Code=OBDX_BU7
[devops@ /]$ export SCHEMA_PASS=devops#obdx182
[devops@ /]$ export ENTITY_EHMS_DATABASE_HOSTNAME=mumaa012.in.oracle.com
[devops@ /]$ export ENTITY_EHMS_DATABASE_PORT=1521
[devops@ /]$ export ENTITY_EHMS_DATABASE_SID=obdxdb.in.oracle.com
[devops@ /]$ export ENTITY_EHMS_DBA_DIRECTORY_NAME=TBS_DIR
[devops@ /]$ export ENTITY_EHMS_DATABASE_SYS_USER=sys
[devops@ /]$ export ENTITY_EHMS_DATABASE_SYS_PASS=devops@sys
[devops@ /]$ export ENTITY_EHMS_SCHEMA_NAME=OBDXEHMS
[devops@ /]$ export ENTITY_EHMS_SCHEMA_PASS=devops#ehms
[devops@ /]$ export ENTITY_EHMS_HOST_SCHEMA_NAME=FCUBS140
[devops@ /]$ export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=FCUBS140HST
[devops@ /]$ export WLS_DOMAIN_PASS=weblogic182
[devops@ /]$ export ENTITY_EHMS_CCY=GB
[devops@ /]$ python runInstaller.py --silent --addEntity
```

### Installation Status in case of Oracle FLEXCUBE Core Banking, Oracle FLEXCUBE Universal Banking, Oracle FLEXCUBE Universal Banking with Oracle Banking Payments

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

When the installation completes, the below message is displayed

```
Starting Entity Configuration
Calling WLST
Initializing WebLogic Scripting Tool (WLST) ...
Welcome to WebLogic Server Administration Scripting Shell
Type help() for help on available commands
Connecting to t3://100.76.133.230:7001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBDX211TEST".
Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.
Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').
Creating Data source OBDXBU2_B1A1
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
OBDXBU2_B1A1 created successfully.
Exiting WebLogic Scripting Tool.
Entity successfully configured.
```

Post successful installation refer to section [Post Installation steps](#) for manual steps to be performed for

- UBS additional entity (sub-section : Oracle FLEXCUBE Universal Banking Solution (OBAPI with UBS))
- OBPM additional entity (sub-section: Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBAPI with OBPM))

### 3. Installation Status in case of other hosts as Add Entity

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

- THP(third party as entity)

```
[devops@ ~]$ cd /opt/oracle/ && cd bin/ && python runInstaller.py --silent --addEntity
Password validated for OSEM_INSTALL
Execution of DB script for OSEM_BUI started
Executed DBX_FW_CONFIG_ALL_0.sql successfully
Execution completed.
```

# Steps to Create Credential Mapping

## Credential Store Mapping

The OBDX system utilizes external integrations to facilitate seamless communication with various services. To establish these connections, credentials are required to authenticate and authorize access. These credentials are not hardcoded but rather initialized post-installation. They are subsequently encrypted and stored within the database, ensuring confidentiality and integrity. This subsequent section outlines the procedures and guidelines for configuring and managing these credentials within the OBDX environment.

To utilize the credential mapping functionality, retrieve the **com.ofss.digx.CredentialsStore.jar** file from the designated location:

`OBDX_Installer/installables/OBDX/BASE/25.1.0.0.0/utils/tools`

## Running the Credential Mapping Application

Execute the application using the following command:

```
java -jar com.ofss.digx.CredentialsStore.jar <csv_file> <DataBaseCredentials>
<DataSeedFlag>
```

### Command Parameters:

1. **<csv\_file>**  
Provide the path to your CSV file containing user credentials by replacing **<csv\_file>** with the actual file location.

### CSV File Format Requirements

The CSV file must adhere to the following structure:

- Contain exactly three columns: type, username, and password
- Include a header row with column names: type,username,password
- Subsequent rows should contain individual credential entries, with each row representing a distinct set of credentials
- Ensure that the value in the type column is unique for each credential entry

Example CSV File

**Table 12-1 WAR deployments**

type	username	password
MERCHANT	OBDX	PASSWORD111

2. **<DataBaseCredentials>**  
Specify the **<DataBaseCredentials>** parameter as a comma-delimited string comprising the following components:
  - Database username
  - Password



- JDBC URL (in the format jdbc:oracle:thin:@host:port/service\_id)

The expected format for <DataBaseCredentials> is: username,password,jdbc\_url.

**Example:** User>Password123,jdbc:oracle:thin:@host:port/service\_id

Ensure accurate input of these values to establish a successful connection to the database.

### 3. <DataSeedFlag>

To control the seeding of data into the digx\_fw\_credentials table, set the <DataSeedFlag> parameter to 'Y' to populate the table with the generated credentials. Alternatively, specify 'N' to simply display the credentials without persisting them to the database.

Example command to run this

```
java -jar com.ofss.digx.CredentialsStore.jar data.csv
DB_USER,DB_PASSWORD,jdbc:oracle:thin:@//HOST:PORT/SERVICE_ID Y
```

Upon executing this utility, you will obtain an encrypted password, which can then be utilized in conjunction with other credentials. Subsequently, these credentials will be populated into the database.

Extensibility:

To leverage custom credentials inserted into the system, utilize the following code snippet:

```
ICredentialStore
    store =
CredentialStoreFactory.getCredentials(CredentialStoreKeys.CREDENTIAL_IPMLEMENT
ATION);
Credential credentials = store.getCredentials(<custom_type>);
```

Replace <custom\_type> with the desired type associated with the custom credentials.

Import:

Import the jar implementation

```
com.ofss.digx.infra:com.ofss.digx.infra.crypto.impl:$libs_digxVersion
```

into your gradle project

To ensure proper configuration, verify that the entry in the digx\_fw\_config\_all\_b table has a prop\_id of **credential\_impl**, a category\_id of **CredentialStore**, and a PROP\_VALUE of **com.ofss.digx.infra.cred.DatabaseCredentialsStore**. Confirm that these values match exactly to guarantee correct functionality. If discrepancies are found, update the entry accordingly to reflect the specified values.

The AES key is no longer required to be explicitly inserted, as it is dynamically generated by the system when the utility is run and stored within the keystore located at DIGX\_FW\_KEYSTORE.

For any encryption operations that require the use of the AES key, utilize the SymmetricCryptographyProviderFactory class, which is available in the same JAR, instead of relying on the credential. This approach streamlines the encryption process and enhances overall security.

```
SymmetricCryptographyProviderFactory.getInstance().getLatestProvider().encrypt
t(data);
```

```
SymmetricCryptographyProviderFactory.getInstance().getLatestProvider().decrypt(data);
```

# 13

## OBAPI Product Security

Refer below document for OBAPI product security configuration

**Oracle Banking APIs Security Guide**

# 14

## OBAPI Product – Best Practice

- [Tablespace for AUDIT INDEX](#)

### 14.1 Tablespace for AUDIT INDEX

The index's used by AUDIT table should be moved into new tablespace from current AUDIT tablespace.

Follow below steps

- Create a new tablespace
- Give quota to OBAPI schema

```
alter user <OBAPI_SCHEMA> quota unlimited on  
<OBAPI_AUDIT_INDEX_TABLESPACE>;
```

- Drop and create below index by mapping the newly created tablespace

- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\  
IDX\_DIGX\_AL\_API\_AUDIT\_LOGGING.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\  
IDX\_DIGX\_AL\_API\_AUDIT\_LOG\_HIST.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\IDX\_DIGX\_AL\_AUDIT  
\_LOGGING.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\  
IDX\_DIGX\_AL\_AUDIT\_LOGGING\_1.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\  
IDX\_DIGX\_AL\_AUDIT\_LOGGING\_2.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\  
IDX\_DIGX\_AL\_AUDIT\_LOGGING\_3.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\  
IDX\_DIGX\_AL\_AUDIT\_LOGGING\_4.sql
- OBAPI\_Installer\installables\db\OBAPI\ddl\oracle\audit\IDX\_DIGX\_AL\_AUDIT  
\_LOGGING\_DETAILS.sql

## JPA and OBAPI multi-cluster

In a multi-cluster environment, below JPA related changes should be implemented

- Go to Weblogic server
- Open config\META-INF\persistence.xml
- Append below configuration for all data-source  
<property name="eclipselink.cache.coordination.jms.host" value="t3://<WEBLOGIC-HOST-NAME OR IP>:<MANAGED-SERVER-PORT>/" />

Replace with respective hostname or IP and Port no (this should be the managed server port number which hosts the JPA queues in the cluster)

Key pointers;

- Multi-cluster here refer's to :
  - Single cluster with multiple nodes (2 or more physical servers hosting the OBAPI product)
  - 2 or more Weblogic cluster's
- Ensure these (persistence.xml) changes are available to all Managed server by maintaining appropriate classpath

# 16


## Troubleshoot Overview

This section describes how to troubleshoot OBAPI setup.

### Invalid database password

This topic contains troubleshooting information if you receive an error when attempting to connect to the database server.

If you get the following error:

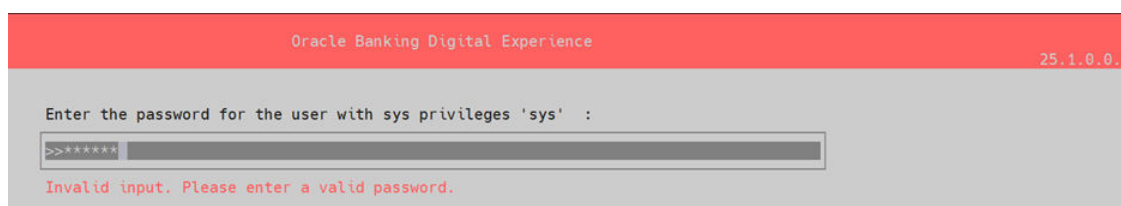

Try one of the following:

- Verify that the database is running.
- Check Network connectivity between Weblogic Server and Database server.
- Check the database configuration in installer.properties file
- Verify that the entered password is correct.

### cx\_oracle module

This topic contains troubleshooting information about problems with cx\_Oracle python module.

If you get the following error:

```
[root@server ~]# python3
Python 3.11.9 (main, Mar 25 2025, 10:00:00) [GCC 10.2.1 20210130 (Red Hat 10.2.1-11)] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> import cx_Oracle
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
cx_Oracle.DatabaseError: DPI-1047: 64-bit Oracle Client library cannot be loaded: "libclntsh.so
```

Execute the below command:

```
export LD_LIBRARY_PATH=/usr/lib/oracle/19.10/client64/lib:$LD_LIBRARY_PATH
python
import cx_Oracle
cx_Oracle.__version__
```

```
[devops@server ~]$ export LD_LIBRARY_PATH=/usr/lib/oracle/18.3/client64/lib/:$LD_LIBRARY_PATH
[devops@server ~]$ python3
Python 3.11.9 (main, Mar 25 2025, 10:00:00) [GCC 10.2.1 20210130 (Red Hat 10.2.1-11)] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> import cx_Oracle
>>> cx_Oracle.__version__
'8.3.0'
```

## Failed Database Scripts

This topic contains troubleshooting information in case of database script failures.

If you get the following error in DB\_installation.log:

```
2017-07-13 13:43:32,302 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/TYACTB_VD_BAL_INPUT.sql successful
2017-07-13 13:43:32,322 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/TYACTB_VD_BAL_RETURN.sql successful
2017-07-13 13:43:32,325 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/SYN/FCC_ACVMS_ALL_AC_ENTRIES.syn successful
2017-07-13 13:43:32,332 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/SYN/fcc_cltbs_liq_settlements.syn successful
2017-07-13 13:43:32,393 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/SPC/DIGX_CLOSING_BAL_HIST.spc successful
2017-07-13 13:43:35,287 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/SPC/DIGX_CLOSING_BAL_HIST.sp successful
2017-07-13 13:43:42,883 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/30B/FCDX_COMPILE_SCHEMA.sql successful
2017-07-13 13:43:42,898 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/entity_objects/VW/fcat_vw_account_movements1.vw successful
2017-07-13 13:43:42,898 DEBUG total scripts=652
2017-07-13 13:43:42,898 DEBUG scripts successfully executed=644
2017-07-13 13:43:42,911 DEBUG Running execute-seeds.sql
2017-07-13 13:43:42,911 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/APPLDATA.sql successful
2017-07-13 13:44:02,450 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/APPLICATIONMESSAGE.sql successful
2017-07-13 13:44:15,511 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTAPPSEQUENCE.sql successful
2017-07-13 13:44:15,616 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTIDENTITYNETWORKCODES.sql successful
2017-07-13 13:44:17,739 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTHOSTAPPDATAMAP.sql successful
2017-07-13 13:44:19,485 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTHOSTINTERFACE.sql successful
2017-07-13 13:44:21,468 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTPRODUCTMAP.sql successful
2017-07-13 13:44:27,224 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTPROPERTIES.sql successful
2017-07-13 13:44:28,770 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTQUERY.sql successful
2017-07-13 13:45:39,980 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTUI_DOWNLOADPARAMS.sql successful
2017-07-13 13:45:40,174 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/SW_NATL_DIR.sql successful
2017-07-13 13:45:41,051 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTFORMATS.sql successful
2017-07-13 13:45:41,981 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/mstdevice.sql successful
2017-07-13 13:45:41,747 DEBUG Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTIDENTITYSECTYPELANG.sql successful
2017-07-13 13:45:41,796 ERROR Executed /scratch/jenkins/OBBOX_Installer/ExecInstances/13Jul1338/db/UBS/seed/mstlang.sql failed
2017-07-13 13:45:41,796 DEBUG total scripts=15
2017-07-13 13:45:41,797 DEBUG scripts successfully executed=14
2017-07-13 13:45:42,137 DEBUG Connected to mum00apd.in.oracle.com on port 1522
2017-07-13 13:45:49,609 DEBUG SUCCESSFULLY installed UBS database
2017-07-13 13:45:49,612 DEBUG Creating ABOUT table
2017-07-13 13:45:49,643 DEBUG Connected to obdxd.in.oracle.com on port 1521
2017-07-13 13:45:49,651 DEBUG Executed DIGX_FW_ABOUT_UBS.sql successful
```

Check the detailed log of the failed SQL file at <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db folder.

## Failure of Policy Seeding

This topic contains troubleshooting information if policy seeding fails during installation.

If you get the following error:

```
Policy seeding failed. Please see logs for more details
```

Try one of the following:

- Check if Entitlement.log is created on following path <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ and contains any SEVERE errors for Entitlement policy seeding.

- Check if Task.log is created on following path  
<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ and contains any SEVERE errors for Task policy seeding.
- Check if Dashboard\_seed.log is created on following path  
<OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ and contains any SEVERE errors for Dashboard policy seeding.
- Check the seedPolicies.log in <OBAPI INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ directory if it contains any runtime errors generated during execution of the policies Seeding in OBAPI schema

Fix the problem by following below steps:

- Login to OBAPI installer server
- Over-write the policies files (Day0Policy.csv; Entitlement.csv; Resources.csv and Task.csv) from OBAPI Product zip into <OBAPI INSTALLER DIR>/installables/policies directory
- Browse to <OBAPI INSTALLER DIR>\installables\policies
- Edit Entitlement\_log4j.properties , Task\_log4j.properties & Dashboard\_seed\_log4j.properties . Replace <logs\_path> with directory where policy seeding logs will be generated  
e.g.

```

# default file output is in user's home directory.
#java.util.logging.FileHandler.pattern = %h/java%.log
java.util.logging.FileHandler.pattern = <logs_path>/Task.log
java.util.logging.FileHandler.limit = 50000
java.util.logging.FileHandler.count = 1
#java.util.logging.FileHandler.formatter = java.util.logging.XMLFormatter
java.util.logging.FileHandler.formatter = java.util.logging.SimpleFormatter
java.util.logging.SimpleFormatter.format= [%1$tc] %4$s: %2$s - %5$s %6$s%n

# Limit the message that are printed on the console to INFO and above.
java.util.logging.ConsoleHandler.level = OFF
java.util.logging.ConsoleHandler.formatter = java.util.logging.SimpleFormatter

```

```

#####
# default file output is in user's home directory.
#java.util.logging.FileHandler.pattern = %h/java%.log
java.util.logging.FileHandler.pattern = /scratch/Task.log
java.util.logging.FileHandler.limit = 50000
java.util.logging.FileHandler.count = 1
#java.util.logging.FileHandler.formatter = java.util.logging.XMLFormatter
java.util.logging.FileHandler.formatter = java.util.logging.SimpleFormatter
java.util.logging.SimpleFormatter.format= [%1$tc] %4$s: %2$s - %5$s %6$s%n

```

- Run below command manually if “SEVERE” error logs are found in Task.log

```

java -jar -Djava.util.logging.config.file='<logs.properties>'
com.ofss.digx.utils.feed.data.task.jar "Task.csv"
"oracle.jdbc.OracleDriver,
<OBAPI Schema name>,<OBAPI Schema password>,jdbc:oracle:thin:@<OBAPI DB

```



```
hostname or
IP>:<OBAPI DB listener port>/<OBAPI Service Name>"
```

e.g.

```
java -jar -Djava.util.logging.config.file='Task_log4j.properties'
com.ofss.digx.utils.feed.data.task.jar 'Task.csv'
"oracle.jdbc.OracleDriver,OBAPI_THP181,Welcome#1,
jdbc:oracle:thin:@xx.xx.xx.xx:1521/OBAPI"
```

- Run below command manually if “SEVERE” error logs are found in Entitlement.log

```
java -jar -Djava.util.logging.config.file='<logs.properties>'
com.ofss.digx.utils.entitlement.feed.data.jar
'Resources.csv,Entitlement.csv,Day0Policy.csv'
'KERNEL' "oracle.jdbc.OracleDriver,<OBAPI Schema name>,
<OBAPI Schema password>,jdbc:oracle:thin:@<OBAPI DB hostname or
or IP>:<OBAPI DB listener port>/<OBAPI Service Name>"
```

e.g.

```
java -jar -Djava.util.logging.config.file='Entitlement_log4j.properties'
com.ofss.digx.utils.entitlement.feed.data.jar 'Resources.csv,Entitlement.c
sv,
Day0Policy.csv' 'KERNEL' "oracle.jdbc.OracleDriver,OBAPI_THP201,Welcome#1,
jdbc:oracle:thin:@xx.xx.xx.xx:1521/OBAPI"
```

#### Note

Please remove the space between multiple csv's if there is any.

- Run below command manually if “SEVERE” error logs are found in Dashboard\_seed.log

```
java -jar -Djava.util.logging.config.file='<logs.properties>'
com.ofss.digx.utils.dashboard.jar '<path>/
dashboard_json' "oracle.jdbc.OracleDriver,<OBAPI Schema name>,
<OBAPI Schema password>,jdbc:oracle:thin:@<OBAPI DB hostname or
IP>:<OBAPI DB listener port>/<OBAPI Service Name>"
```

e.g.

```
java -jar -Djava.util.logging.config.file= Dashboard_seed_log4j.properties'
com.ofss.digx.utils.dashboard.jar
'/installables/policies/dashboard_json'
"oracle.jdbc.OracleDriver,OBAPI_THP201,
Welcome#1,jdbc:oracle:thin:@xx.xx.xx.xx:1521/OBAPI"
```

- Post successfully execution, restart Managed server.

# Index

## I

---

Installation, [1](#)  
Installation Process, [10](#)  
Installation using Silent Mode, [1](#)  
Installer Scope, [1](#)  
Installer Verification, [1](#)

## J

---

JPA and OBAPI multi-cluster, [1](#)

## M

---

Multi Entity, [1](#)  
Multi-entity installation using Silent Mode, [1](#)

## O

---

OBAPI Logging Configuration, [1](#)  
OBAPI Product Security, [1](#)  
OBAPI Product Verification, [1](#)

## P

---

Post Installation Steps, [1](#)

Prerequisites, [1](#)  
Purpose of the Document, [1](#)

## S

---

Step 1: Selecting the Product, [10](#)  
Step 2: Selecting the Installation Flavour, [11](#)  
Step 3: Selecting the Installation Type, [11](#)  
Step 4: Selecting the Installation Version, [12](#)  
Step 5: Selecting the Component, [12](#)  
Step 6: Selecting the Installation Mode, [13](#)  
Step 7: Verification Screen, [14](#)  
Step 8: Entering Required Credentials, [15](#)  
Step10: Finalizing Installation, [17](#)  
Step9: OBAPI Routing Hub screen appears, [17](#)  
Steps to Create Credential Mapping, [1](#)

## T

---

Tablespace for AUDIT INDEX, [1](#)  
Troubleshoot Overview, [1](#)